


CleanScape® Cleaners

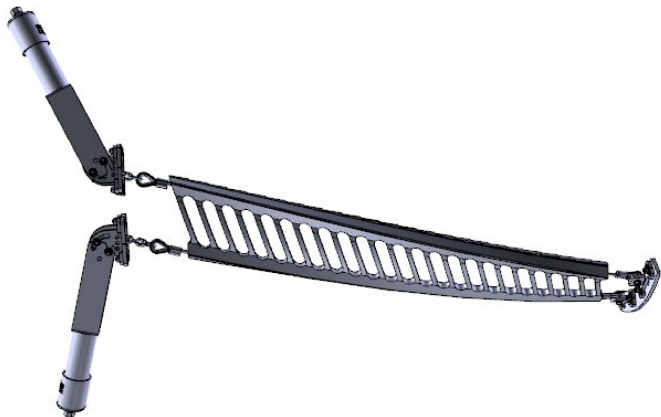

The **CleanScape® Cleaner** is mounted diagonally on the discharge pulley and forms a three-dimensional curve. The cleaner has a matrix of carbide scrapers incorporated into the main rubber body during the vulcanization process. Despite a relatively low contact pressure between the belt and cleaner 85 to 95% of the adhering material is removed.

FEATURES & BENEFITS

- Simple installation, minimum space required
- Low wear to the belt and cleaner
- Blade completely corrosion resistant
- Suitable for use with all types of mechanical joints
- Low maintenance
- Available with stainless steel installation kits
- Suitable for use in explosive atmospheres
- Suitable for use with reversing belts


SPECIFICATIONS

Cleaner Type	Pulley Diameter mm (in.)		Belt Width mm (in.)	Maximum Belt Speed m/s (fpm)	
	Min.	Max.		Vulcanized Splice	Mechanical Splice
C1CSXRXXXXXX	300 (12)	550 (22)	400–1000 (18-40)	6 (1200)	4 (800)
C1CMXRXXXXXX	550 (22)	900 (34)	500–1800 (18-72)	8 (1500)	4 (800)
C1CLXRXXXXXX	900 (36)	1250 (50)	800–2400 (24-96)	8 (1500)	4 (800)
C1CHXRXXXXXX	800 (32)	2000 (78)	1000–3000 (40-120)	8 (1500)	6 (1200)

CARBIDE BLADE SELECTION

Carbide Selection	Application Description	Typical Materials
A	Suitable for less abrasive products and medium belt speeds. Applicable with mechanical belt splices.	Limestone, gypsum, potash
B	Suitable for moderate abrasive products and medium belt speeds. Applicable with mechanical belt splices.	Sand, coal, salt, ore, sugar
C	Suitable for extremely abrasive materials and highest belt speeds. Do not use with mechanical belt splices.	Quartz sand, ash, ore, hardstone, slag, sinter

*H available only with carbide B.

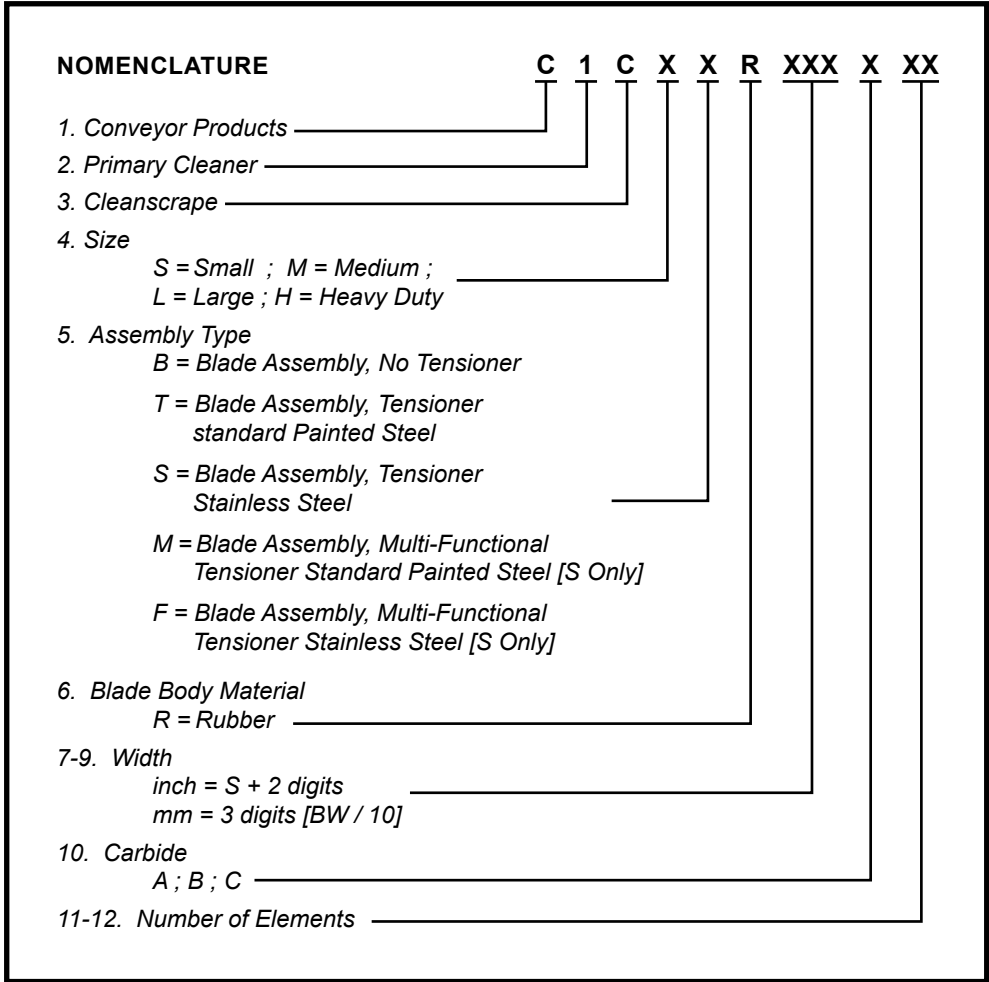

TENSIONER SELECTION

Size	Belt Width mm (in.)	Tensioner
S	≤ 1000 mm (≤ 40")	Single 2,8kN
M	≤ 1400 mm (≤ 54")	Single 4,2kN
M	> 1400 mm (> 54")	Dual 4,2kN
L	≤ 1400 mm (≤ 54")	Single 4,2kN
L	< 2000 mm (< 78")	Dual 4,2kN
L	≥ 2000 mm (≥ 78")	Dual 6,6kN
H	≤ 1400 mm (≤ 54")	Single 4,2kN
H	< 2000 mm (< 78")	Dual 4,2kN
H	≥ 2000 mm (≥ 78")	Dual 6,6kN

GENERAL NOTES:

- 1) Standard: H with carbide type B only
- 2) Standard:
 - Copper Swages
 - Stainless Steel Thimble



Martin Engineering Germany
 In der Rehbach 14
 65396 Walluf, Germany
 Ph.: 0049 (0)6123 9782 0
 Fax 0049 (0)6123 7 55 33
 info@martin-eng.eu | www.martin-eng.de

Martin Engineering Ltd
 8, Experian Way, NG2 Business Park
 Nottingham NG2 1EP Nottinghamshire, UK
 Ph.: 0044 (0)115 946 4746
 Fax 0044 (0)115 946 5550
 info@martin-eng.co.uk | www.martin-eng.co.uk



Subject to change without prior notice. Quality management system certified according to DNV - ISO 9001