



# Martin® Roller Tracker™

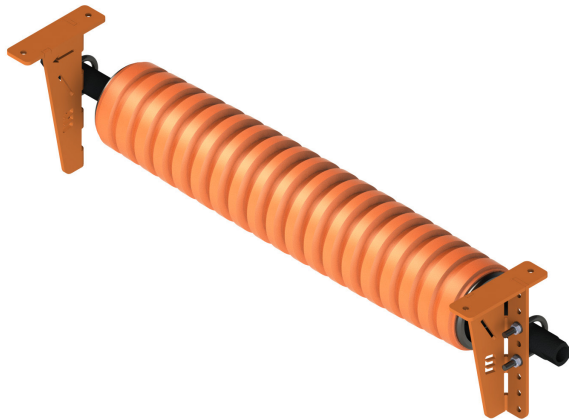

### BENEFITS

- Ease of installation and low maintenance.
- A vibration free rolling action.
- A design that meets customer needs.
- Superior bearings used for superior quality.
- No contact with edge of the belt.
- Polyurethane lagging improves durability.

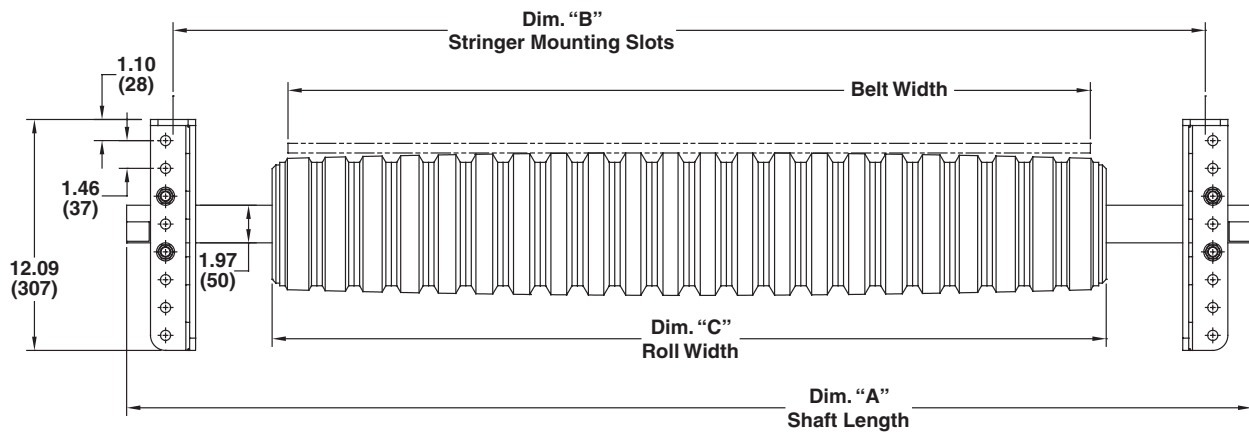

### DIMENSIONS

Assembly P/N	Belt Width in. (mm)	Dim. "A"	Dim. "B"	Dim. "C"
MRT-20	20 (500)	36.97 (939)	28.98 (736)	22.24 (565)
MRT-24	24 (600)	40.87 (1038)	32.99 (838)	26.14 (664)
MRT-30	30 (750)	46.85 (1190)	38.98 (990)	31.97 (812)
MRT-36	36 (900)	52.91 (1344)	45.04 (1144)	37.83 (961)
MRT-42	42 (1050)	58.90 (1496)	51.02 (1296)	43.66 (1109)
MRT-48	48 (1200)	64.88 (1648)	57.01 (1448)	49.53 (1258)
MRT-54	54 (1350)	70.87 (1800)	62.99 (1600)	57.32 (1456)
MRT-60	60 (1500)	76.85 (1952)	68.98 (1752)	63.15 (1604)



**Martin Engineering USA**  
 One Martin Place  
 Neponset, IL 61345-9766 USA  
 800 544 2947 or 309 852 2384  
 Fax 800 814 1553  
 www.martin-eng.com

**COMPANY WITH  
 QUALITY SYSTEM  
 CERTIFIED BY DNV  
 = ISO 9001:2008 =**