

Brute® Pneumatic Motor-Driven Vibrators

CCV Series

With an integral clamp foot, these powerful vibrators suit portable applications like railcar unloading. Also available for hydraulic power.

DV Series

For permanent installation on large vessels, these vibrators come with four- or six-bolt-hole mount bases. Also available for hydraulic power.

CV Series

CV Series Vibrators incorporate two bolt-holes for permanent mounting on hoppers, bins, or chutes. Also available for hydraulic or DC electric power.

CC Series

With its cradle lug bracket, the CC Series is suited for applications requiring portability and position changes. Also available for hydraulic power.

Rule-of-thumb vibrator sizing:

One pound of vibrator force for every ten pounds of bin content. Mount vibrator as close as possible to material outlet. Reinforce mount area to prevent flexure of bin wall at mount location.

Force output data derived from vibrator mounted to 10,000-pound (4530 kg) test block. Frequency and force will decrease on less rigid block.

1. High-Grade Ductile Iron Case provides maximum durability.
2. Low-Maintenance Bearings require lubrication after 500 hours of service.
3. Integral Clamp Foot on CCV Series provides portability and positive mounting.
4. Powerful, Efficient Motor for long service life, minimal power consumption.
5. Tapped Exhaust Port allows muffler installation to reduce operating noise.
6. Adjustable Eccentrics allow tuning of force output of most models to match application.



CCV Series



DV Series



CV Series



CC Series

PERFORMANCE DATA

Model	Force Output				Shipping Weight		Part Number
	Maximum		Minimum		lb	kg	
	lb	n	lb	n			
CC2.8-2A	5145	22,886	910	4048	45	20.4	29762
CV2.8-2A					49	22.2	29763
CCV4-2A	5100	22,686	1500	6672	58	26.3	29773
DV4-2A					70	31.8	29771
CCV6-25-6A	8212	36,529	5374	23,905	110	50.0	14716-02
DV6-25-6A					115	52.2	18113-02
CCV6-50-6A	9605	42,725	5683	25,279	110	50.0	14716-04
DV6-50-6A					115	52.2	18113-04


TECHNICAL DATA SHEET

DIMENSIONS

Model	A	B	C	D	E	F	G	H*	J**
CC2.8	9.0 (229)	7.12 (186)	9.09 (231)	N/A	3.0 (76)	3.87 (98)	N/A	N/A	1/2-14
CV2.8	9.87 (251)	6.87 (174)	9.81 (249)	8.0 (203)	3.0 (76)	3.44 (86)	0.875 (22)	3/4	1/2-14
CCV4	11.5 (292)	8.25 (210)	9.37 (238)	8.25 (210)	0.94 (24)	4.12 (205)	N/A	N/A	1/2-14
DV4	12.0 (305)	8.12 (206)	9.37 (238)	4- holes 2.5 x 10.5 (63.5 x 267)	4.0 (102)	4.0 (102)	0.875 (22)	5/8	1/2-14
CCV6	14.5 (368)	11.3 (287)	12.87 (327)	11.25 (286)	1.0 (25)	5.62 (143)	N/A	N/A	1/2-14
DV6	18.0 (457)	11.0 (279)	12.87 (327)	6- holes 2 x 2 x 16 (51 x 51 x 406)	6.0 (152)	5.69 (144)	1.12 (29)	3/4	1/2-14


*Bolt Size **Pipe Size

CCV Series

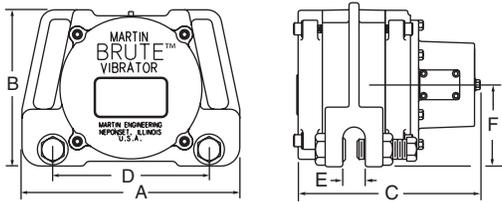


CC Series


Shown with optional Cradle Lug Bracket, P/N 28732.

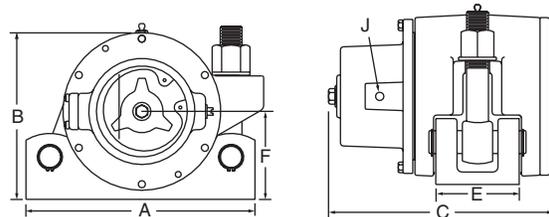

DV Series

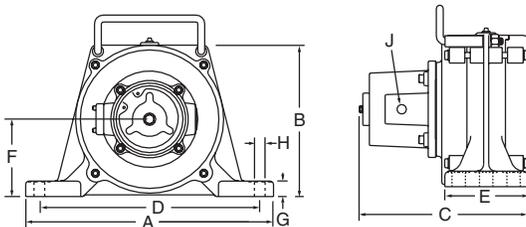

CV Series

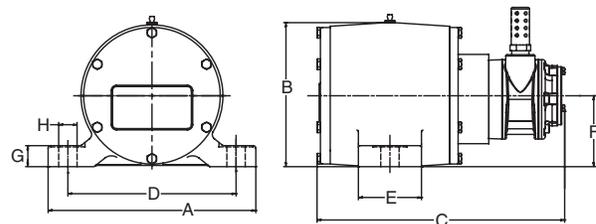

Martin Engineering USA

3600 Cougar Drive
Peru, IL 61354 USA
855 394 4885
Fax 800 814 1553
www.martin-eng.com

**COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001:2008 =**

Problem Solved™ GUARANTEED!

Form No. L3412-02/18
© Martin Engineering Company 1997, 2018