


EVO® External Wear Liner Retrofit Kit

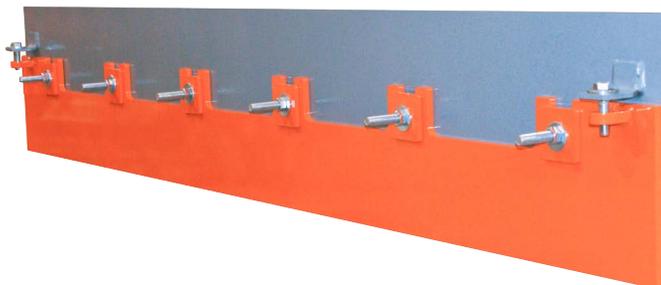

Installed outside conveyor transfer point skirtboards, [EVO® External Wear Liner Retrofit Kit](#) is an economical upgrade that improves skirtboard sealing and prevents spillage. Wearliner can typically be installed without requiring work inside chute or interfering with existing chute supports.

EVO® External Wear Liner can easily be installed on existing studs in applications already using Martin® ApronSeal™ skirting and clamps.

BENEFITS

Improves Sealing

Keep the burden of cargo away from sealing system.

Simple Installation

Wear liner plates mount to the outside of existing transfer point skirtboard, without interfering with existing supports.

Easy Adjustment

Jack screws provide precise adjustment of wear liner to reduce spillage.


Suits Cargo and Conditions

Available in 3/8 or 1/2 in. thick Brinell 400 or Brinell 500 abrasion-resistant plate. Fits conveyors with trough angles from flat to 35°. Standard length is 72 in. (1829 mm).

Improves Maintenance


Replacing worn external wear liner requires minimal welding and no chute entry.

Item	Part Number
External Wear Liner Retrofit Kit	38481-XXXS

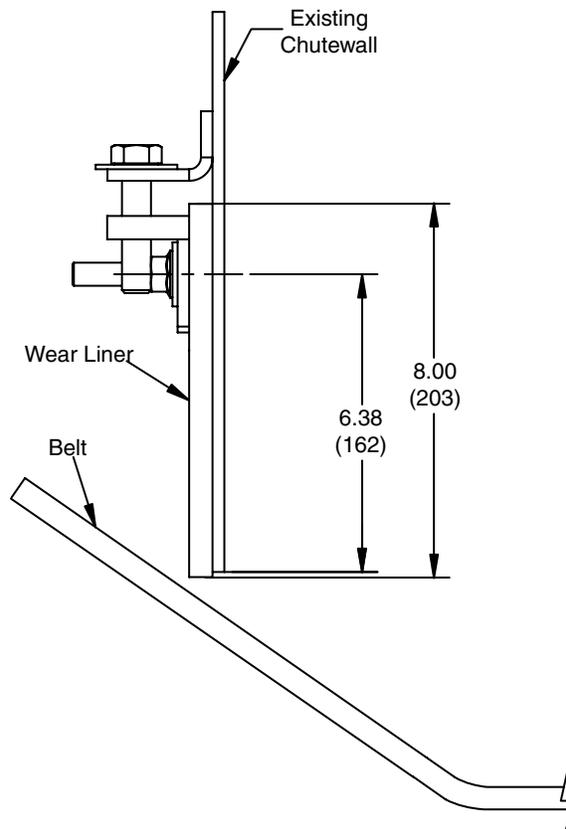

TECHNICAL DATA SHEET

EVO® External Wear Liner

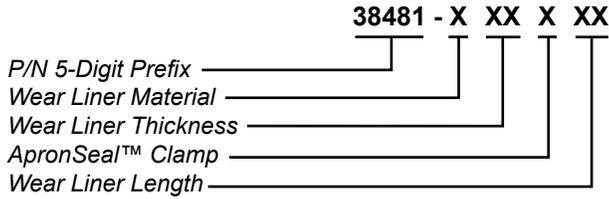

WEAR LINER MATERIAL

- 4: AR400
- 5: AR500
- C: 304 SS
- S: 316 SS

WEAR LINER THICKNESS

- 25: .25 inch (AR400 & AR500 only)
- 38: .38 inch
- 50: .50 inch


APRONSEAL™ CLAMP

- Blank: without Clamp
- S: with Standard Clamp
- Q: with Quick Release Clamp (AR400 & AR500 only)

WEAR LINER LENGTH

- Blank: 72 inches
- 48: 48 inches

EVO® External Wear Liner—Ceramic

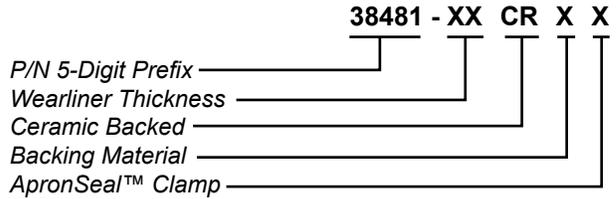

WEARLINER THICKNESS

- 50: .50 inch


BACKING MATERIAL

- P: Mild Steel
- C: 304 SS
- S: 316 SS

CLAMP

- Blank: No ApronSeal™ Clamp
- S: with ApronSeal™ Clamp

EVO® External Wear Liner—Replacement Kit

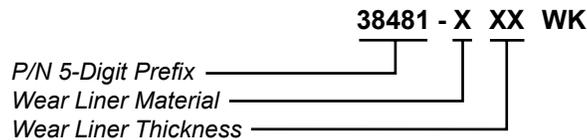

WEAR LINER MATERIAL

- 4: AR400
- 5: AR500
- C: 304 SS
- S: 316 SS

WEAR LINER THICKNESS

- 25: .25 inch
- 38: .38 inch
- 50: .50 inch



Martin Engineering USA

One Martin Place
Neponset, IL 61345-9766 USA
800 544 2947 or 309 852 2384
Fax 800 814 1553
www.martin-eng.com

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001:2008 =