



80 YEARS OF INNOVATION

m ***martin***[®]
engineering

PRODUCT CATALOG

L4203



Cleaner, Safer, More Productive Bulk Material Handling Since 1944

Founded in 1944, Martin Engineering has grown from a modest family-owned entrepreneurial operation in the United States to the global leader in bulk material handling solutions. With an emphasis on innovation and customer satisfaction, we've developed cutting-edge technologies that improve efficiency, safety, and productivity across various industries. Over the years, we've expanded our reach to every corner of the globe, delivering high-quality products, services, and training to sectors including mining, processing, energy, and transportation.

With over 80 years of experience and proven results, we continue to set industry standards through our ongoing commitment to research and development. Our dedication to solving complex material handling challenges has earned us a trusted reputation with operations worldwide. Whether we're providing solutions to keep conveyor belts clean and aligned, control airborne dust and material spillage, or maintain proper material flow and throughput, our solutions are known for their reliability and performance, enhancing safety and fostering long-term partnerships with our customers across the globe.



Martin Engineering products, sales, service, and training are available from factory-owned facilities worldwide, supplemented by a strategic network of partners.

- United States
- Australia
- Brazil
- Central Asia
- Chile
- China
- Colombia
- France
- Germany
- India
- Indonesia
- Italy
- Kazakhstan
- Malaysia
- Mexico
- Middle East
- North & West Africa
- Peru
- Scandinavia & Baltic States
- Spain
- South Africa
- Turkey
- United Kingdom

Martin Engineering Indonesia

Martin Engineering Indonesia (Legal : PT. Martin Supra Engineering) was established in 2002 as the joint venture between Martin Engineering, USA (www.martin-eng.com) and PT. Suprabakti Mandiri, Indonesia (www.beltcare.com). The office of Martin Engineering Indonesia is located in Tangerang - Indonesia; an integrated sales and manufacturing facility, Martin Engineering Indonesia is responsible for customers in Southeast Asia: Indonesia, Singapore, Brunei Darussalam, Thailand, Philippines, Laos, Cambodia and Vietnam. With inhouse and manufacturing facility, Martin Engineering Indonesia can tailored products to meet special requirement.

Primary Belt Cleaners

CleanScrape® Primary Cleaner	4
QC1+™ Primary Belt Cleaners	5
QC1™ Primary Belt Cleaners	5
SHD Series Primary Belt Cleaner	6
ECOSAFE™ Primary Belt Cleaner	6
QC1™ STS™ Primary Belt Cleaners	7
Tensioners	7
Hanger Mounts & Mount Plates	8
N2® Position Indicator	8
Replacement Blades	9

Secondary Belt Cleaners

CleanScrape® Secondary Cleane	10
Durt Hawg® DH2 Cleaner	10
SQC2S™ Secondary Belt Cleaners	11
SQC2S™ Reduced Mini Cleaner	11
O2 Cleaner	11
DT2S Reversing Cleaner	12
DT2H Reversing Cleaner XHD	12
ECOSAFE™ Secondary Cleaner	12
QC#2	12
UBX Secondary Cleaner	13
Square Mainframe Tensioner	13
Far Side Tensioner	13
Pressure Roller Bracket	13
SQC2S™ Quick Access Door	13

Specialty Belt Cleaners

Brush Cleaners	14
Washbox™ Belt Cleaning System	15
Vibrating Dribble Chute	15
Torsion Arm Chevron Cleaner	15
Food Grade Cleaner	15

Pulley Protection Plows

VPlow	16
Torsion VPlow	17
Diagonal Plow	17

Services & Training

Walk The Belt™	34
Foundations™ Training	34

Belt Alignment

Tracker™	18
Tracker™ Reversing	19
Roller Tracker™	19

Belt Sealing

ApronSeal™ Skirting	20
Self Adjusting Skirting HD	21
Skirtboard Liner	21
ApronSeal™ Urethane Skirting	21
External Wear Liner	21

Belt Support

Impact Cradles	22
High Speed Impact Cradle	23
Combination Cradle	23
Slider Cradle	24
Trac-Mount™ Idlers	24
Return Roller	24

Dust Management

Air Cleaner	25
Dust Bag	25

Transfer Point Kits

Load Zone	27
Stilling Zone	27
Settling Zone	27

Safety Accessories

Inspection Doors	28
Conveyor Guard	29
Return Roller Guard	29
Return Roller Basket	29
Urethane Chute Patch	29

Air Cannons

Hurricane Air Cannon	30
Typhoon Air Cannon	31
Tornado Air Cannon	31
Passport Air Cannon	31
Blow Pipes	31
SMART™ Series Nozzles	32
SMART™ Series Retractable Nozzle 360°	32
Thermo Safety Shield	32
Nozzles	33
Mount Plates	33
Air Cannon Controller	33
Air Cannon X-Stand	33

Vibration Solutions

Ball Vibrators	34
Roller Vibrators	35
Turbine Vibrators	35
MM & MC Series Electric Vibrators	35
AP5 Series Piston Vibrators	36
PV Series Piston Vibrators	36
Thumper™ Timed Impactors	36
Electric Screen Vibrators	37

**Product
Technical
Data**

**Technical Documentation**

Technical data sheets for all products are available in a convenient resource that can be downloaded directly from the QR code to the right or the URL below. The PDF features a clickable table of contents as well as a bookmarks panel for quick and easy navigation.

<https://hubs.la/Q02NQYHH0>




Scan code
for technical
data sheets.



Primary Belt Cleaners

Martin Engineering belt cleaners are the original standard in engineered belt cleaning. World class manufacturing, robust construction, and the highest-quality urethane on the market deliver unrivaled cleaning performance, durability, and reliability.

Multiple blade, tensioner, and mainframe options available to meet the unique demands of application requirements.



Scan code for more information and resources.

CleanScrape® Primary Cleaner

CleanScrape® provides unmatched cleaning performance and is guaranteed to last up to four times longer than any other belt cleaner without need for re-tensioning or adjustment for the life of the blade. CleanScrape® provides the lowest operating cost with the greatest return on investment over the life of the cleaner. Covered by our industry-best *Absolutely No Excuses Money-Back Guarantee!*

Installed at a 3-dimensional helix angle across the face of the discharge pulley, this revolutionary cleaner requires minimal space for installation. Because it's equipped with tungsten carbide tips and applies minimal pressure to the belt, CleanScrape® is safe for use on mechanical splices, making it the most versatile belt cleaner on the market.



Scan code for additional information.



Max Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Pulley Diameter in. (mm)
120 (3000)	1500 (7.5)	12-78 (300-2000)

CleanScrape® Heated Primary Cleaner

Features internal heating elements throughout the body of the blade to prevent material buildup on the blade itself. Available for medium and large blade sizes with B-carbide cleaning element.

Max Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Pulley Diameter in. (mm)
96 (2400)	1500 (7.5)	22-50 (560-1270)

QC1+™ Primary Belt Cleaners

Patented constant angle radial pressure (CARP) blades ensure continuous and consistent cleaning performance across all stages of blade life and are available in six specialized urethane formulations to best suit the material being conveyed.


Patented blade holders allow blades to be cut to any length to perfectly match the material path.

Available with 1- or 3-piece mainframe* and Twist™ or Spring tensioner. Suitable for temperatures ranging from -30 to 180° F (-34 to 82° C).



Model	Max Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Pulley Diameter in. (mm)
QC1+™ PV	72 (2000)	500 (2.5)	12-16 (300-400)
QC1+™ PD*	72 (2000)	900 (4.6)	16-22 (400-500)
QC1+™ HD	108 (2800)	900 (4.6)	16-22 (400-500)
QC1+™ HD Max	120 (3048)	1200 (6.0)	24-30 (610-762)
QC1+™ XHD	120 (3048)	1200 (6.0)	24-30 (610-762)

* PD model available in 1-piece mainframe only.

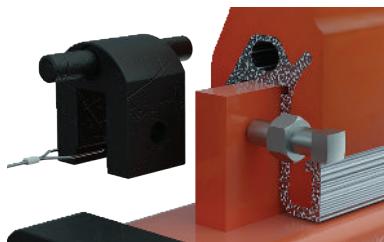

Martin Engineering's patented QC1+™ blade design features a unique mounting interface that takes advantage of blade holders that allow blades to be cut to any length and mounted to the mainframe to perfectly match the material path.

Blades that match the material path of the conveyor system provide the most effective cleaning by ensuring the proper contact with the belt and reducing uneven blade wear and unnecessary wear of the belt surface, extending equipment life.



Scan code for additional information and resources.

QC1™ Primary Belt Cleaners

Patented constant angle radial pressure (CARP) blades ensure continuous and consistent cleaning performance across all stages of blade life and are available in six specialized urethane formulations to best suit the material being conveyed.

One-pin blade replacement makes belt cleaner blade replacement and easy, one-minute, no-tool operation



Model	Max Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Pulley Diameter in. (mm)
QC1™ PV	72 (2000)	500 (2.5)	12-16 (300-400)
QC1™ PD	72 (2000)	900 (4.6)	16-22 (400-500)
QC1™ HD	108 (2800)	900 (4.6)	16-22 (400-500)
QC1™ HD Max	120 (3048)	1200 (6.0)	24-30 (610-762)
QC1™ XHD	120 (3048)	1200 (6.0)	24-30 (610-762)



Scan code for additional information and resources.

PRIMARY BELT CLEANERS

SHD Series Primary Belt Cleaners

Designed and engineered specifically for the punishing demands of super heavy-duty mine-grade applications, SHD Series Cleaners offer rugged structural steel mainframes, robust turnbuckle tensioners, and massive high-performance urethane blades providing up to 12 full inches (305 mm) of wear life without need for re-tensioning or adjustment for the life of the blade.

Available with patented CARP blades in two specialized urethane formulations, both MSHA-approved (IC-95/6) for underground application, to ensure continuous and consistent cleaning performance across all stages of blade life.

Suitable in applications with temperatures ranging from -30 to 300° F (-34 to 149° C).



Scan code for additional information and resources.

Model	Max Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Pulley Diameter in. (mm)
SHD 600 Series	120 (3000)	1500 (7.5)	24-48 (600-1200)
SHD 1200 Series	120 (3000)	1500 (7.5)	48+ (1200+)



Visit our online **Foundations™ Learning Center** for free articles, videos, e-books, and blog posts offering a variety of information including selection guides, maintenance checklists, troubleshooting tips and tricks, and much more.

>> foundations.martin-eng.com/en/knowledge

ECOSAFE™ Primary Belt Cleaner

Designed for heavy-duty applications, the innovative ECOSAFE™ Primary Cleaner features a unique split track blade cartridge design that significantly reduces urethane waste, simplifies blade replacement, and improves safety.

The interface between the blade and the cartridge has been completely redesigned to require 26% less urethane in the base of the blade, resulting in lighter, easier-to-handle blades and 60% less discarded urethane from a used blade.

Blade changes require no tools, and the cartridge slides out from the mainframe to allow maintenance to be performed outside of the chute, reducing downtime and improving safety.

Available with either air or spring tensioners and suitable for use on reversing belts and operating temperatures up to 300°F (150°C).



Scan code for additional info and resources.



Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Pulley Diameter in. (mm)
18-96 (450-2400)	1200 (6)	24 (600) and up



Visit our **On-Demand Webinar Library** for dozens of free on-demand video recordings covering a wide variety of topics including belt conveyor optimization, carryback and belt cleaning, material flow, dust control, and safety and culture.

>> foundations.martin-eng.com/webinars-on-demand

QC1™ Safe-To-Service (STS™) Primary Belt Cleaners

Designed for rugged conditions, this sturdy cleaner's stainless steel mandrel allows the blade cartridge to be safely serviced from outside the chute wall or conveyor structure without confined space entry or breaking the safety plane. Changing the blade is a simple one-pin operation, making replacement of a worn blade safe and simple.

Available with original patented CARP blades in six specialized urethane formulations to best suit the material being conveyed and ensure continuous and consistent cleaning performance across all stages of blade life.

Available with spring or air tensioners and suitable for temperatures ranging from -30 to 300° F (-34 to 149° C).



Scan code for additional information and resources.

Model	Max Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Pulley Diameter in. (mm)
QC1™ HD STS™	72 (2000)	900 (4.6)	16-22 (400-500)
QC1™ XHD STS™	72 (2000)	1200 (6.1)	24-30 (600-760)

Tensioners

Martin® Belt Cleaner Tensioners provide the most robust and rugged construction to maintain reliable and proper blade-to-belt tension to ensure unmatched belt cleaning performance while providing ease-of-service and minimal maintenance.

The patented Martin® Twist™ Tensioner uses energy from a twisted rubber coupling to supply consistent belt cleaning pressure with minimal adjustment and can be used on either primary or secondary cleaners.

The Twist™ Tensioner allows mechanical splices to pass without damage. In the event that the blade pulls through, the tensioner's coupling rolls over, releasing pressure and reducing the risk of harm to personnel or equipment.

Light aluminum housing and the fully-enclosed design keeps the tensioner mechanism clean. Simple adjustment involves twisting the tensioning gear the specified number of notches (determined by belt width). The ratchet will automatically lock in place.

Spring Tensioners maintain efficient belt cleaning with a rugged coil spring providing visibility of the tensioning mechanism. Air Tensioners utilize plant air to deliver and maintain consistent, reliable blade-to-belt pressure without a mechanical device.

Dual tensioning is recommended for belt cleaners installed on belts wider than 48 inches (1200 mm). Mounts and tensioners can be purchased individually or in packages with various belt cleaning systems.



Twist™ Tensioner



Air Cylinder Tensioner



Spring Tensioner



Spring Tensioner XHD



Scan code for additional info and resources.

Hanger Mounts & Mount Plates




Hanger Mount
for XHD Spring
Tensioner




Hanger Mount for
Twist™ Tensioners



Heavy Duty Hanger Mount
for Secondary Cleaners



Mount Plate for XHD
Spring Tensioners



Mount Plate for
Twist™ Tensioners



12x12
Mount Plate
for Twist™
Tensioners

Martin® Hanger Mounts provide the framework to install a conveyor belt cleaner and tensioner assembly on open head-pulley belt conveyors without an enclosed chute, providing the necessary support to achieve and maintain proper and effective cleaning position.

Mount Plates provide the necessary surface with predrilled and cut holes to mount tensioners when adequate chutewall is not available.

Scan code for
additional
info and
resources.



Visit our online **Foundations™ Learning Center** for free articles, videos, e-books, and blog posts offering a broad variety of information including selection guides, maintenance checklists, troubleshooting tips and tricks, and much more.

>> <https://foundations.martin-eng.com/en/knowledge>

Genuine Martin® Belt Cleaner Replacement Blades

One of Martin Engineering's defining characteristics and core strengths is our expertise in urethane formulation and production.

Martin Engineering is the original and industry-leading manufacturer of specialty urethanes for heavy-duty, high-performance belt conveyor components, including belt cleaner blades, chute liners, and impact and support bars. We offer the highest-quality urethane products, formulated and manufactured entirely in-house at our company headquarters in Neponset, Illinois, USA.



Urethane	Color	Duro-meter	Application Conditions	Temperature Range
Standard	Orange	83	Suitable for most applications, including abrasive conditions and exposure to solvents or oil. For use with materials such as coal, ore, bauxite, coke, refuse.	-20° to 180°F (-30° to 80°C)
High-Temp	Green	83	For use with high temperature materials such as clinker. Can handle intermittent temperatures of 350°F (177°C).	-40° to 300°F (-40° to 150°C)
Chemical Resistant	Brown	86	Improved resistance to chemicals and reduces water absorption for high moisture environments such as limestone. Best choice for applications exposed to chemicals with pH as high as 11 and as low as 4.	-40° to 180°F (-40° to 80°C)
Low Rigidity	Tan	87	For use with dry products such as sand and gravel.	-20° to 180°F (-30° to 80°C)
Low Adhesion	Navy Blue	91	For use with sticky or tacky products such as cement, glass, and wood chips.	-20° to 180°F (-30° to 80°C)

Our unrivaled product quality is informed by decades of research and development and ensured by our state-of-the-art production process completed start-to-finish under one roof by the industry's foremost experts.

Martin Engineering's unique CARP blade design provides Constant Angle Radial Pressure to ensure consistent cleaning throughout the entire wear life of the blade, maximizing return on your investment and delivering unrivaled reliability without degradation in performance. Martin® replacement blades provide up to 53% more wearable urethane than competitive blades for maximum blade life.

Scan code
for additional
info and
resources.



Visit our **On-Demand Webinar Library** for dozens of free on-demand video recordings covering a wide variety of topics including belt conveyor optimization, carryback and belt cleaning, material flow, dust control, and safety and culture.


>> foundations.martin-eng.com/webinars-on-demand



Secondary Belt Cleaners

Secondary cleaners are installed with the cleaning edge at a scraping angle with high blade-to-belt pressure behind the head pulley where the belt is at its flattest, providing an ideal surface to effectively clean.

Secondary cleaners are much better suited to scrape off the remaining smaller particles and higher-moisture carryback that primary cleaners can't remove. A properly specified, installed, and maintained multiple-cleaner system can reliably achieve 90 to 95% carryback removal from the conveyor belt.



Scan code for more information and resources.

CleanScrape® Secondary Cleaner

The CleanScrape® Secondary Cleaner is an all stainless steel assembly featuring independent 6-inch wide blades with carbide tips. Each tip is supported on spring-loaded arms at both ends. The load springs allow independent blade rotation back and forward as well as up and down.

This range of motion provides equal load pressure across each blade, absorbs obstructions, conforms to ever-changing belt undulations, and arcs safely in the event of belt rollback.




Scan code for additional information and resources.

Durt Hawg® DH2 Cleaner

The original engineered secondary belt cleaner, the Durt Hawg® is an established industry workhorse. High-volume blades provide improved cleaning efficiency and longer wear life while a sturdy mainframe withstands tough conditions.

Simple design requires only a hammer to mount the steel cleaning blades which are set into rugged, one-piece molded urethane arms that absorb impact and allow splices to pass without damage.

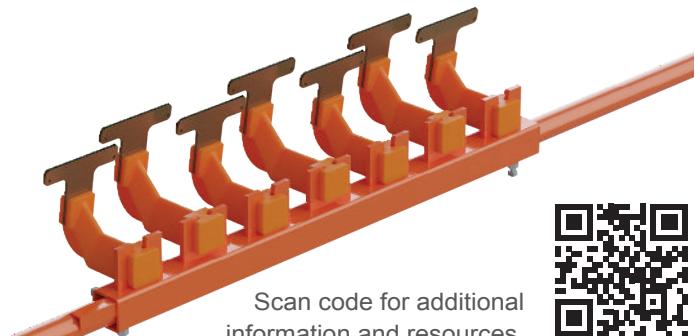

Scan code for additional information and resources.

Belt Width in. (mm)	Max Belt Speed fpm (m/s)	
18-96 (450-2400)	900 (5.0) for vulcanized splices	600 (3.0) for mechanical splices

Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Temperature F (C)
18-96 (450-2400)	750 (3.8)	-30° to 180° (-34° to 82°)

SQC2S™ Secondary Belt Cleaners

The most versatile and best-selling secondary cleaner on the market, SQC2S™ is a reliable and proven solution for a broad range of demanding applications across virtually every industry. Its rugged construction withstands harsh environments, high-speed belts, and high-tonnage loads.

The SQC2S™ Secondary Belt Cleaner offers five unique, easy-to-service blade cartridge options to match the needs of your application.

Available with acid-resistant blades for belts with clips and suitable for use with reversing belts.

Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Temperature F (C)
18-96 (450-2400)	1500 (7.5)	-30° to 300° (-34° to 149°)



Scan code
for additional
information
and resources.


*Chevron Blade
not pictured.*

Scorpio Blade

SAF Blade

Orion Blade

H2O Blade

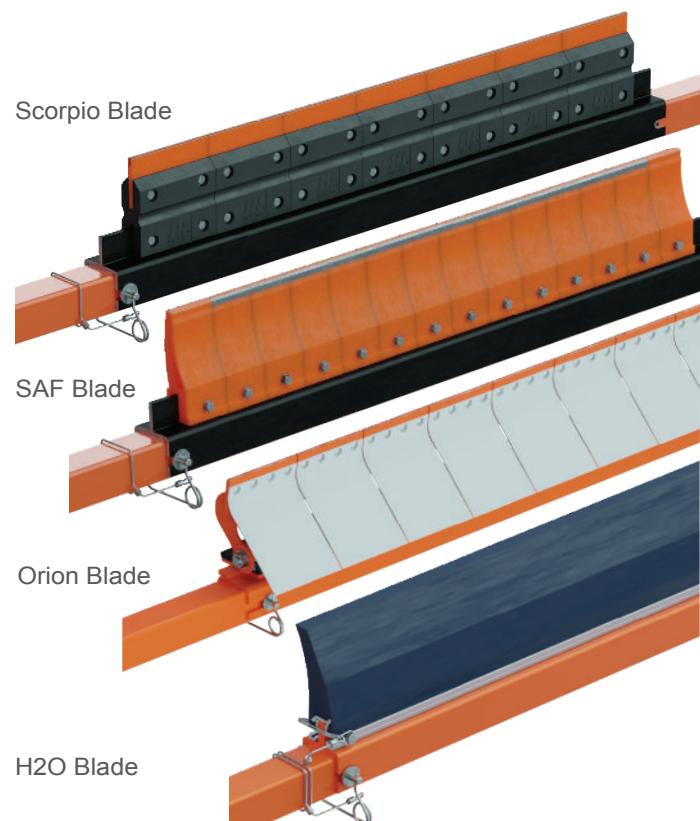

SQC2S™ Reduced Mini Cleaner

Compact design allows installation in close quarters while the narrow profile resists material buildup.

Individually-cushioned tungsten carbide blades deliver effective and reliable cleaning performance while cushioning impact and accommodating reversing belt direction, eliminating risk to the belt, splice, or blade.



Scan code for additional
information and resources.



O2 Cleaner

“Paint-scraper” cleaning angle provides maximum removal of carryback and tungsten carbide blade tips provide effective and long-lasting cleaning.

Blade shield allows removed material to slide off without buildup while blade holder flexes to allow tip deflection in direction of belt travel for splice passage.



Scan for info
& resources.



Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Temperature F (C)
18-96 (450-2400)	750 (3.8)	-30° to 300° (-34° to 149°)

Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Temperature F (C)
30-96 (800-2400)	1500 (7.5)	-30° to 300° (-34° to 149°)

SECONDARY BELT CLEANERS

DT2S Reversing Cleaner

Combining the best features of the two preceding designs, the DT2S Reversing Cleaner features a split-track blade cartridge that slides in and out on a stainless steel mandrel. This unique design makes for a fast and easy service procedure to reduce conveyor downtime.

Lean profile minimizes space requirements, allowing installation in spaces as narrow as seven inches (178 mm).



Scan code for additional information and resources.



DT2H Reversing Cleaner XHD

Features rugged blades installed on a track that slides into cleaning position on a rugged steel mandrel. This unique design makes for a quick and easy service procedure that reduces conveyor downtime and improves productivity.

Massive extra-heavy duty (XHD) blades stand up to challenging conditions, including heavy material loads and high belt speeds.



Scan code for additional information and resources.



Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Temperature F (C)
24-120 (500-3048)	900 (4.6)	-30° to 300° (-34° to 149°)

Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Temperature F (C)
18-120 (450-3048)	1200 (6.1)	-30° to 300° (-34° to 149°)

ECOSAFE™ Secondary Cleaner

Designed for heavy-duty applications, the innovative ECOSAFE™ Secondary Cleaner features a unique split track blade cartridge design that significantly reduces urethane waste, simplifies blade replacement, and improves safety.

The interface between the blade and the cartridge has been completely redesigned to require 36% less urethane in the base of the blade, resulting in lighter, easier-to-handle blades and 56% less discarded urethane from a used blade.

Blade changes require no tools, and the cartridge slides out from the mainframe to allow maintenance to be performed outside of the chute, reducing downtime and improving safety.

Available with either air or spring tensioners and suitable for use on reversing belts and operating temperatures up to 300°F (150°C).



Scan code for additional information and resources.



Belt Width in. (mm)	Max Belt Speed fpm (m/s)
18-96 (450-2400)	1200 (6)

MARTIN® QC™#2

One-pin blade replacement makes belt cleaner blade replacement an easy, one-minute, no-tool operation. Unique teardrop blade profile absorbs radial stress while spring tensioners provide linear relief. Individual 76-mm (3-inch) wide blades independently conform to the profile.



UBX Secondary Cleaner

Solid, one-piece urethane blade—with or without embedded metal cleaning element—provides highly wear-resistant cleaning performance for long wear life on high-speed, high-tonnage, mine-duty belts. Mechanical spring tensioners require minimal maintenance while providing reliable cleaning performance.

Belt Width in. (mm)	Max Belt Speed fpm (m/s)
24-72 (610-2000)	1200 (6) and up



Scan code for additional information and resources.

Square Mainframe Tensioner

Provides uniform tension for square mainframe secondary belt cleaners to deliver reliable, high-performance cleaning while requiring minimal adjustment over the life of the blade. Air Bag Tensioners also available for secondary belt cleaners.

**Far Side Tensioner**

Provides a simple, hand-operated way to evenly tension both sides of a conveyor belt cleaning system from one side. This unique mechanical device allows for quick adjustment of secondary belt cleaners in tight spaces, improving maintenance safety by eliminating the need to climb over belts or use unsafe methods.



Scan code for additional information and resources.

**Pressure Roller Bracket**

The Pressure Roller Bracket stabilizes the conveyor belt, providing proper pressure for multiple conveyor belt scraper installations or where space limitations prevent installation on head pulley so the cleaner(s) can be tensioned without lifting the belt.




Scan code for additional information and resources.

SQC2S™ Quick Access Door

Scan code for additional information and resources.


Split cover urethane door held securely in place on chute structure or mount plates with embedded magnets to provide a durable and reliable shield around SQC2S™ Secondary Cleaner mainframes while allowing easy, no-tool access for inspection and maintenance. Integrated tether secures top and bottom halves together during removal. Max application temp 300° F.

Designed with slotted bolt holes to simplify installation on conveyor structure. Supplied with a roller or can be used with existing conveyor equipment. Pressure Roller Brackets are available for either “arm-and-blade” or vertically-tensioned secondary cleaner systems.

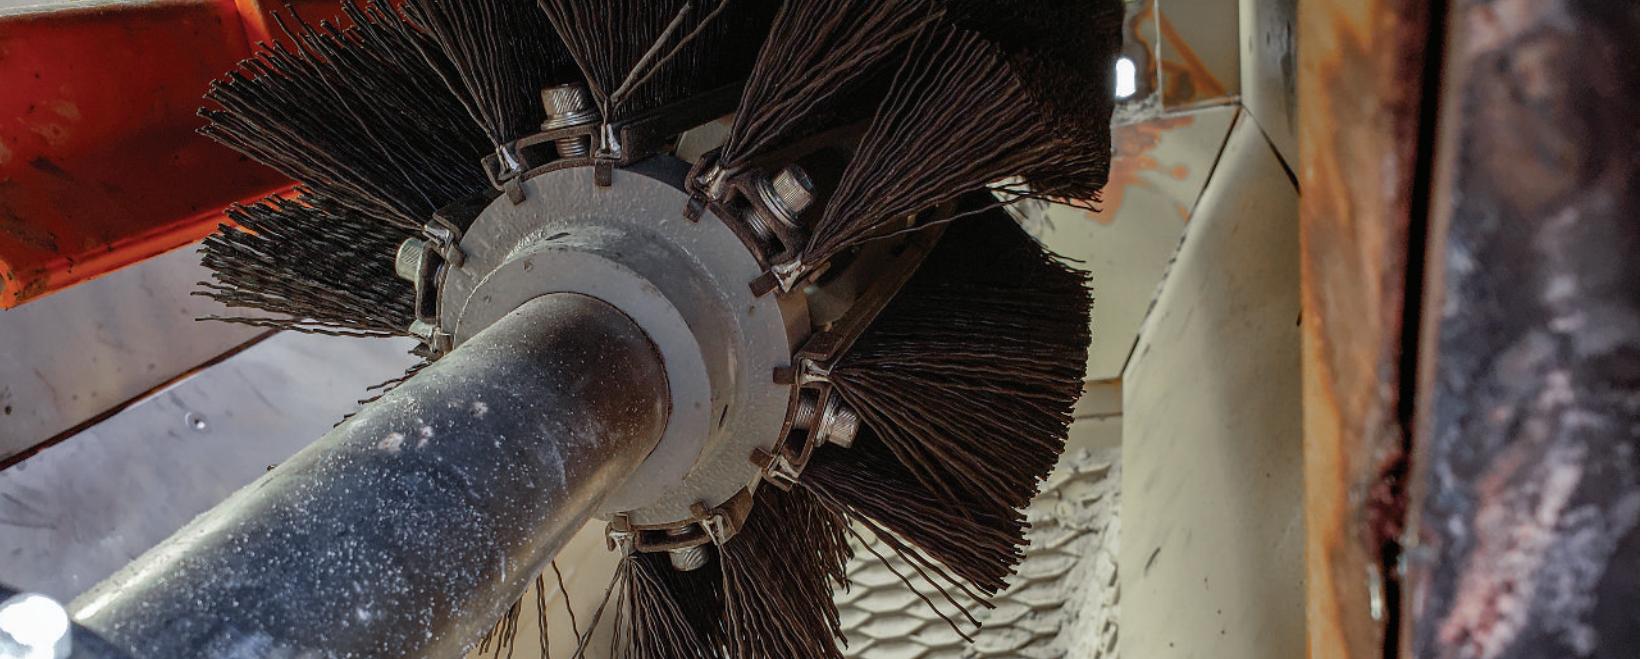

Specialty Belt Cleaners

Installed mainly as secondary belt cleaners, Martin Engineering's specialty belt cleaners include products engineered to perform under the most challenging conditions, such as extreme temperatures, as well as suited for food grade applications. Products are also available that perform with varying types of belts, including ribbed, flighted, grooved, or chevron conveyor belts.



Scan code for
more information
and resources.


Brush Cleaners

Effective cleaning performance on difficult applications, including belts with ribs, cleats, grooves, or chevrons, or belts carrying sticky materials or stringy fibers.

Efficient electric motor provides effective cleaning with powered rotary action without excessive power consumption. Durable angle iron and stainless steel components provide long service in tough conditions.

Strip Brush Cleaner uses 12 brush strips assembled on a series of hubs mounted on a shaft to form a 10-inch diameter brush. Strip brush design allows material to fall off the brush rather than settle into the bottom of the bristles. Design allows simple replacement of individual brush strips.

Spiral Brush Cleaner features bristles wrapped in a continuous spiral around brush shaft to deliver effective cleaning performance on dry fines clinging to belts with cleats, chevrons, or ribs.

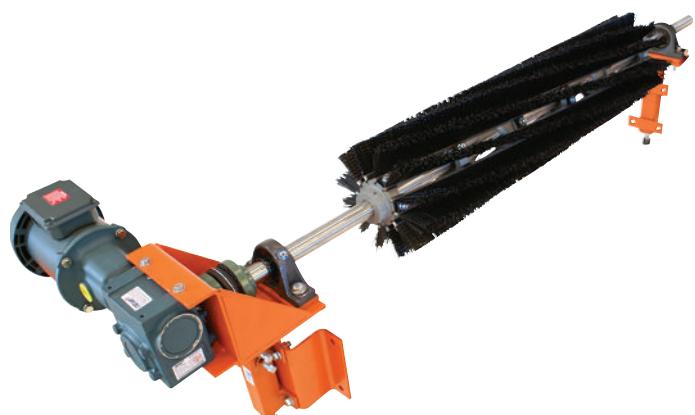

Scan code for additional
information and resources.

Model	Max Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Temperature F (C)
Strip Brush	60 (1800)	500 (2.5)	-30° to 180° (-34° to 82°)
Spiral Brush	72 (2000)	500 (2.5)	-30° to 180° (-34° to 82°)

Washbox™ Belt Cleaning System

Installed as a secondary cleaner along the conveyor's return run, the Martin® Washbox™ Cleaning System provides the ultimate in belt cleaning technology. The Washbox™ gently spray-applies water for superior belt cleaning.

Single-cleaner system consists of a powder-coated steel enclosure equipped with one roller, one spray bar, two inspection doors, and one secondary cleaner.

Dual-cleaner system consists of a powder-coated steel enclosure equipped with three rollers, four spray bars, four inspection doors, and two secondary cleaners.

Single-cleaner and stainless steel washbox options available, as well as Martin Engineering's full range of high-performance urethanes. Belt cleaners are also available with tungsten carbide, stainless steel, or urethane blades.



Scan code for additional information and resources.



Belt Width in. (mm)	Max Belt Speed fpm (m/s)
18-84 (400-2200)	750 (3.8)

Vibrating Dribble Chute

The Martin® Vibrating Dribble Chute uses an electric vibrator and a low adhesion plastic liner to keep material from clogging chutes and burying belt cleaners. Low-friction plastic lining promotes material flow without accumulation while the rubber-lined bracket transfers vibration to liner without metal fatigue.



Scan code for additional info and resources.

Torsion Arm Chevron Cleaner

The Martin® Torsion Arm Chevron Cleaner features 30° offset arms with either rubber or urethane blades to effectively remove carryback while gently stepping over belts with ribs, chevrons, and cleats.



Scan code for additional information and resources.



Food Grade Cleaner

Martin® Food Grade Belt Cleaner fits requirements of belt conveyors in food processing and packaging. Available as either a primary or secondary cleaner with high-density polyethylene or nylon blades on stainless steel mainframes with either an air, spring, or hub mount tensioner.



Scan code for additional information and resources.



Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Temperature F (C)
18-96 (400-2400)	500 (2.5)	-30° to 180° (-34° to 82°)


Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Temperature F (C)
4-48 (100-1200)	350 (1.8)	-40° to 380° (-40° to 193°)



Pulley Protection Plows

Martin Engineering's tail protection products are designed to prevent material that has landed on the inside of the belt during the return from being pulled into the tail pulley. If it isn't removed, the material can cause extensive damage to the entire conveyor system, especially the tail pulley and the belt.

Our tail protection products, which are designed to plow discharge material to the side of the belt for easy control and cleanup, are available for standard and reversing belts, with self-adjusting models that rise and fall with fluctuations in belt tension. We also offer products designed for varying speeds and belt widths.



Scan code for more information and resources.

VPlow

The VPlow is an effective and economical solution for belt and pulley protection from medium- to heavy-duty applications. The VPlow floats on the inside surface of a conveyor belt to reliably remove stray material. The self-adjusting design provides effective cleaning through all stages of blade wear.

Low-profile rugged steel frame construction bolts together for easy installation and stands up to the toughest applications.

Easily replaceable blades are available in 60 Shore A Durometer Nitrile rubber or a variety of long-wearing 90 Shore A Durometer urethanes to match application and material requirements. Tough one-piece urethane bull nose provides long-lasting life and easy replacement.



Scan code for additional info and resources.

Model	Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Wearable Blade in. (mm)
Modular	18-120 (450-2800)	900 (4.6)	2 (51)
Heavy Duty	18-120 (450-2800)	900 (4.6)	2 (51)
Extra Heavy Duty	42-120 (1000-2800)	1000+ (5.0)	3 (76)



Visit our **On-Demand Webinar Library** for dozens of free on-demand video recordings covering a wide variety of topics including belt conveyor optimization, carryback and belt cleaning, material flow, dust control, and safety and culture.

>> foundations.martin-eng.com/webinars-on-demand

Torsion VPlow

Mounted with self-adjusting torsion arm suspension, the Torsion VPlow maintains consistent pressure in front of the tail pulley. It rises and falls with fluctuations in belt tension and travel, for effective cleaning in all stages of blade wear, with easy to replace, bolt on rubber or urethane blades.



Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Wearable Blade in. (mm)
18-96 (450-2400)	900 (4.6)	2 (51)

Torsion VPlow Plus

The Martin® Torsion VPlow Plus is mounted with a unique yet simple two-point center mount suspension that provides both constant positive pressure and maximum flexibility to allow the plow to rise and fall with fluctuations in belt tension and travel. This self-adjusting function provides the most effective and reliable cleaning through all stages of blade wear.



Low-profile rugged steel frame construction bolts together for easy installation and stands up to the toughest applications.

Easily replaceable blades are available in 60 Shore A Durometer Nitrile rubber or a variety of long-wearing 90 Shore A Durometer urethanes to match application and material requirements. Tough one-piece urethane bull nose provides long-lasting life and easy replacement.

Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Wearable Blade in. (mm)
18-120 (450-2800)	900 (4.6)	2 (51)

Scan code for additional info and resources.



Diagonal Plow

Hung from brackets on both sides of the conveyor, the Martin® Diagonal Plow's durable 60 shore A durometer nitrile rubber blade floats on the belt surface to remove material in either direction of belt travel without needing adjustment.



Scan code for additional info and resources.




Belt Width in. (mm)	Max Belt Speed fpm (m/s)	Max Temp F (C)	Wearable Blade in. (mm)
18-120 (400-3000)	900 (4.6)	250° (21°)	1.5 (38)



Belt Alignment

By keeping belts tracked correctly, you can keep material in the flow stream and eliminate runaway dust. Martin Engineering's belt alignment products provide immediate, continuous precision adjustment that keeps conveyor belts perfectly aligned, even withstanding the stress caused by wider, thicker belts carrying heavier loads at high speeds.

Our belt tracking products prevent edge damage, extend belt life, reduce spillage, and minimize wear and tear on equipment. Plus, we manufacture trackers that can sense the direction of the belt's movement and make the adjustments needed to keep reversing conveyors correctly centered.



Scan code for more information and resources.

Tracker™

The Martin® Tracker™ is the most reliable and effective solution to provide immediate and continuous precision adjustment for wandering conveyor belts.


Unlike other belt training devices, the Tracker™ excels in reducing edge damage, preventing spillage, and extending belt life. Its automatic, continuous adjustments keep the belt in consistent alignment, ensuring improved tracking that significantly reduces maintenance expenses.

The Tracker™ features a patented parallel steering/training system for precise, ongoing adjustment, maintaining optimal belt alignment and operational efficiency at all times. The Martin® Tracker™ is available in three models to match the requirements of any application.

Model	Belt Width in. (mm)	Max Belt Thickness in. (mm)	Max Belt Speed fpm (m/s)	Revers- ing Belts
Standard Duty	24-54 (500-1600)	0.5625 (14.3)	700 (3.5)	Yes
Heavy Duty	36-72 (800-2000)	1.125 (28.5)	800 (4.0)	Yes
Monster	42-108 (1000-2700)	1.5 (38)	1000 (5.0)	No



Scan code for additional info and resources.

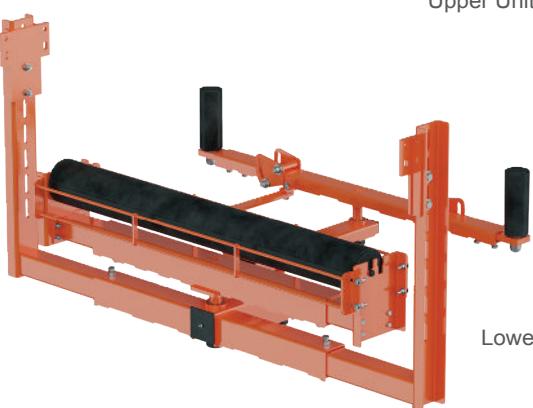

Upper Unit

Lower Unit

Tracker™ Reversing

The Martin® Tracker™ Reversing is a state-of-the-art solution offering immediate and continuous precision adjustment for reversing conveyors that are challenging to track. This innovative system ensures the belt stays perfectly centered regardless of its direction of travel.

The Tracker™ Reversing is equipped with sensing rollers and lever arms at both ends and utilizes a stainless steel lamella, or paddle wheel, to accurately detect the belt's direction and activate the appropriate sensing rollers.

This advanced technology guarantees optimal belt alignment, enhancing operational efficiency and reducing maintenance needs for reversing conveyor systems.

Scan code for additional info and resources.



Belt Width in. (mm)	Max Belt Thickness in. (mm)	Max Belt Speed fpm (m/s)
24-84 (600-2200)	0.5625 (14.3)	700 (3.5)



Visit our **On-Demand Webinar Library** for dozens of free on-demand video recordings covering a wide variety of topics including belt conveyor optimization, carryback and belt cleaning, material flow, dust control, and safety and culture.


>> foundations.martin-eng.com/webinars-on-demand

Roller Tracker™

The Martin® Roller Tracker™ is engineered to meet the rigorous demands of conveyor belt tracking with unparalleled precision and reliability.

Designed for ease of installation and minimal maintenance, it ensures a smooth, vibration-free rolling action that enhances operational efficiency. Featuring superior bearings for exceptional quality, the Roller Tracker™ guarantees reliable performance tailored to customer needs on belt widths from 20-72 inches (500-1650 mm).

Its innovative design eliminates contact with the belt edge, preventing wear and extending belt life. With polyurethane lagging enhancing durability, this tracker delivers long-lasting reliability and optimal belt alignment. Suitable for reversing belts.

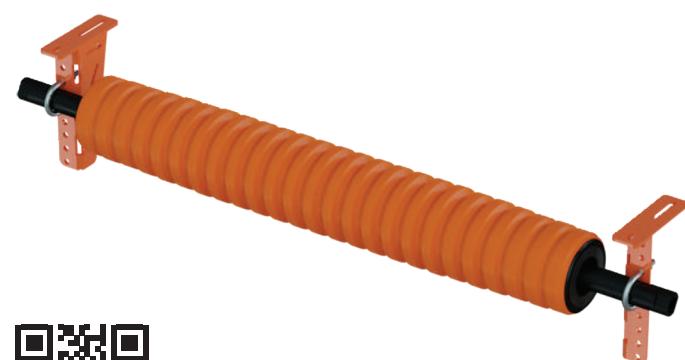

Scan code for additional information and resources.




Visit our website to download our **Foundations™ Books**, industry-standard textbooks for cleaner, safer, and more productive conveyor operation and maintenance, along with e-books covering a variety of specific bulk material handling and material flow topics.

>> foundations.martin-eng.com/book-options



Belt Sealing

Martin Engineering's ApronSeal™ Skirting products are engineered for superior performance in demanding material handling environments. Featuring an innovative dual-sealing design, ApronSeal™ effectively contains airborne dust and mitigates material spillage along conveyor belts. This innovative system requires minimal maintenance and maximizes operational efficiency, safeguarding both workers and equipment. Ideal for applications requiring stringent dust control, ApronSeal™ sets a new standard in conveyor belt skirt sealing, delivering unparalleled reliability and performance.



Scan code for
more information
and resources.

ApronSeal™ Skirting

Martin® ApronSeal™ Skirting provides dual-seal efficiency with a single, one-piece sealing strip for any troughing angle to prevent the escape of fines and dust. The primary seal is clamped to the chute wall with the self-adjusting secondary seal laying outward to create an effective dust seal that is out of the material flow. ApronSeal™ Skirting requires minimal service to maintain an effective seal.

ApronSeal™ Double Skirting uses a patented design that features a reversible elastomer strip to provide a second wear life. Optional quick-release clamps are available. Suitable for application temperatures from -20° to 250°F (-29° to 121°C).



Scan code for additional
information and resources.

Model	Max Belt Speed fpm (m/s)
Single	600 (3.0)
Single HD	750 (3.8)
Single XHD	750 (3.8)
Double	600 (3.0)
Double HD	750 (3.8)
Self-Adjusting	600 (3.0)


Minimum Free Belt Area – in (mm)						
Trough Angle	Single	Single HD	Single XHD	Double	Double HD	Self-Adjusting
0°	2.14 (54)	2.97 (76)	3.50 (89)	2.14 (54)	2.97 (76)	1.50 (38)
20°	2.58 (66)	3.74 (95)	4.25 (108)	2.58 (66)	3.74 (95)	1.50 (38)
35°	2.87 (73)	4.18 (106)	4.75 (121)	2.87 (73)	4.18 (106)	1.50 (38)
45°	3.01 (77)	4.38 (111)	5.00 (127)	3.01 (77)	4.38 (111)	1.50 (38)

Self Adjusting Skirting HD

Martin® Self Adjusting Skirting provides an effective skirtboard seal that eliminates spillage and prevents the problems caused by fugitive material.

It self-adjusts to eliminate skirtboard maintenance. Requiring only 1.25 inches (32 mm) of free belt space outside the chute, Self Adjusting Skirting is the ideal sealing system for conveyors with chutes close to the belt edge. The rubber and clamp assembly can be installed in spaces as low as six inches (150 mm) above the belt.

Durable sealing strip provides wear life of two inches (51 mm). Replacement of a worn sealing strip is a quick and easy operation; just remove the lynchpins and replace the pre-punched rubber strip.

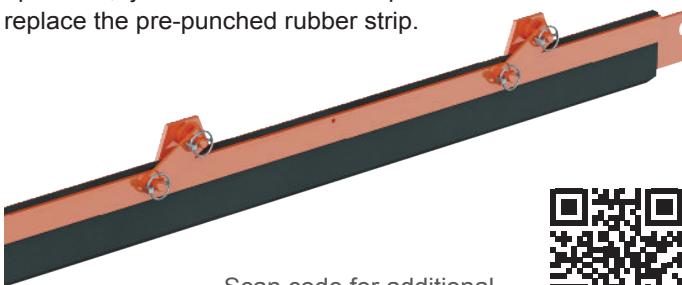


Scan code for additional information and resources.

Max Belt Speed fpm (m/s)	Temp Range F (C)
600 (3.0)	-20° to 250° (-29° to 121°)

Skirtboard Liner

Installed inside conveyor transfer point skirtboards, Martin® Skirtboard Liners absorb impact and abrasion by creating a dam to shield the sealing system from the weight of the material load, prolonging the life of the seal.

Skirtboard Liners feature a steel plate molded inside the urethane to prevent bond issues. Liners are also stackable to line higher drop chutes. Standard lengths are 48 in. (1219 mm).

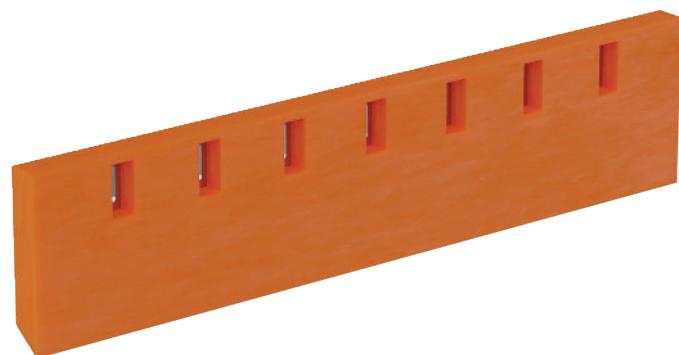


Scan code for more info and resources.

Trough Angle	Height – in. (mm)	
	1.3 in. (33 mm) thick	2.0 in. (51 mm) thick
20°	6.75 (172)	9.88 (251)
35°	6.75 (172)	10.75 (273)
45°	6.75 (172)	11.50 (292)

ApronSeal™ Urethane Skirting

Martin® ApronSeal™ Urethane Skirting effectively contains material fines with a single, one-piece sealing strip for 0-, 20-, 35-, and 45-degree troughing angles. Requires minimal service to maintain an effective seal. Suitable for belt speeds up to 600 fpm (3 m/s) and requires only two inches (50 mm) of free belt area.

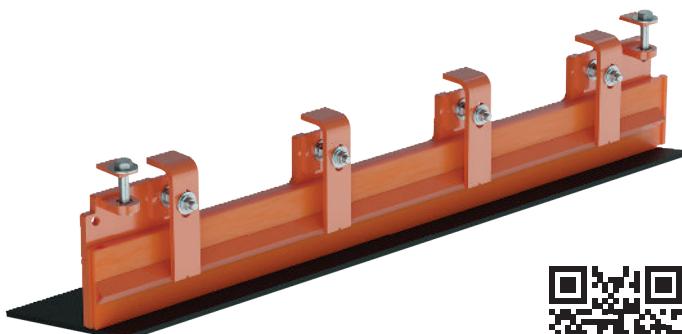

Scan code for additional info and resources.

External Wear Liner

External Wear Liner is installed on the outside of the chute wall, simplifying wear liner inspection and replacement — both without confined-space entry. Improves liner and skirtboard sealing system performance without adding additional conveyor construction cost. The chute wall can be trimmed to avoid material buildup.



Available in a variety of materials and thicknesses. Fits conveyors with trough angles from flat to 35°. Standard lengths are 48 in. (1219 mm) and 72 in. (1829 mm).

Internal Wear Liner also available.

Scan code for additional info and resources.



Belt Support

By providing reliable belt support, especially at transfer points, our products effectively minimize damage and extend the lifespan of your equipment. Martin Engineering's belt support solutions absorb the impact of material falling at transfer points, reducing wear on belts and structures. This proactive approach also prevents belt sag and reduces fugitive material and airborne dust, which pose significant health and safety risks.

Martin Engineering's belt support products are versatile, available for various belt widths, and can be customized to meet specific requirements as needed.



Scan code for
more information
and resources.

Impact Cradles

Our robust conveyor belt support cradles are engineered to safeguard your conveyor system with unparalleled durability. These cradles ensure stable belt alignment, effectively preventing damage and minimizing airborne dust and material spillage. Ideal for enhancing operational efficiency and safety, our cradles maintain a consistent belt line, reducing maintenance costs and optimizing productivity in industrial environments.

Available in standard and wide base.



Scan code for additional info and resources.

Model	Belt Width in. (mm)	CEMA Idler Class	Bar Length ft.	Temp Range F (C)
Light Duty	24-72 (500-2000)	C5 & C6	4	-20° to 180° (-29° to 82°)
Medium Duty	24-72 (500-2000)	C5, C6, D5, D6	4 or 5	-20° to 180° (-29° to 82°)
Trac-Mount™	24-96 (500-2400)	C5, C6, D5, D6	4	-20° to 180° (-29° to 82°)
Heavy Duty	36-72 (800-2000)	E6 & E7	2	-20° to 140° (-29° to 60°)

High Speed Impact Cradle

Designed and engineered for high speed / high tonnage belts, Martin® High Speed Impact Cradles provide belt support in transfer points where belt speeds exceed the operating limits of ordinary impact bar belt support cradles.

Innovative patent-pending upper connector brackets link idlers together throughout the load zone, allowing them to work together as a unified structure. Elastomer bar suspension absorbs shock from impact, maximizing the life of the belt support structure and rolling component while Trac-Mount™ idler design provides ease of service.

Idler Diameter in. (mm)	CEMA Idler Class	Belt Width in. (mm)	Max Belt Speed fpm (m/s)
5 (127)	D5, D6	30-72 (760-1800)	700 (3.5)
5 (127)	E6, E7	36-96 (900-2400)	700 (3.5)
6 (152)	D5, D6	30-72 (760-1800)	870 (4.4)
6 (152)	E6, E7	36-96 (900-2400)	870 (4.4)
7 (178)	D5, D6	30-72 (760-1800)	870 (4.4)
7 (178)	E6, E7	36-96 (900-2400)	870 (4.4)



Scan code for additional information and resources.



Visit our online **Foundations™ Learning Center** for free articles, videos, e-books, and blog posts offering a broad variety of information including selection guides, maintenance checklists, troubleshooting tips and tricks, and much more.

>> foundations.martin-eng.com/en/knowledge

Combination Cradle

Center bars are set slightly below the unloaded belt's line of travel to absorb impact while avoiding continuous friction and wear if the belt is running empty. The wing bars on the sides of the cradle are installed in line with the idlers to allow effective sealing of the transfer point. Eccentrics in wing supports allow outer bars five degrees of wear adjustment. Impact bars are each secured with two bolts making replacement simple.

Optional center rolls reduce friction and require less conveyor drive horsepower than bars.



Scan code for additional information and resources.



Belt Width in. (mm)	Max Belt Speed fpm (m/s)	CEMA Idler Class	Bar Length ft	Temp Range F (C)
24-72 (500-2000)	1000 (5.0)	C5, C6, D5, D6	2	-20° to 160° (-29° to 70°)

BELT SUPPORT

Slider Cradle

Installed under the skirtboard of a transfer point, Martin® Slider Cradles support the edges of the belt to eliminate sag. These cradles prevent transfer point spillage by stabilizing the belt's path and allow effective sealing of the belt edge. Cradles are available with single or double adjustable high-performance UHMW or Stainless Steel Bars to match application requirements.

Scan code for additional info and resources.




Trac-Mount™ Idlers

Trac-Mount™ Idlers utilize sliding frames on a stationary base to provide an idler set that will fit in tight spaces between belt support cradles and allow easy installation and service. Available with standard or wide base frames and utilize either impact or steel rolls in CEMA class C, D, or E on belt widths 18-96 inches (450-2400 mm).

Scan for
additional
info and
resources.



Slide-out/slide-in roller frames allows idler service without need to raise belt or remove adjacent idlers.

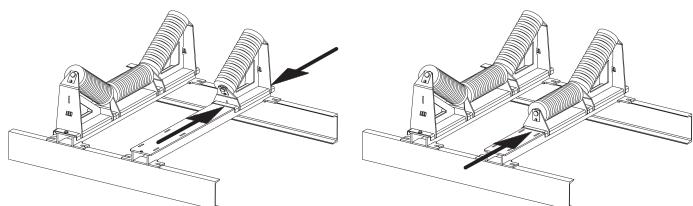

Visit our **On-Demand Webinar Library** for dozens of free on-demand video recordings covering a wide variety of topics including belt conveyor optimization, carryback and belt cleaning, material flow, dust control, and safety and culture.

>> foundations.martin-eng.com/webinars-on-demand

Return Roller

The Martin® Return Roller is a pivoting track-mounted return idler that allows for safe, quick, and simple one-sided serviceability and roll replacement.

Three-piece hanger frame adjusts to accommodate different belt widths from 24-72 inches (500-2000 mm). Universal bracket fits most major idler manufacturers' idlers and sizes.



Scan code for additional
information and resources.



Dust Management

In bulk material handling operations, one of the most significant sources of dust is the belt conveyor transfer point. Dust is generated as bulk material is transferred from one belt to another. When material is in free fall, it is exposed to significant airflow. This airflow, with enough velocity, carries dust until it slows and settles.

The most effective approach to reducing dust at conveyor load zones is to eliminate dust at the source.



Scan code for more information and resources.

Air Cleaner

To overcome the maintenance problems and operating costs of centralized dust control systems, Martin Engineering recommends the use of a Martin® Air Cleaner on conveyor transfer points. Rather than carry dust-laden air to a central collector, insertable systems filter the air locally. There is no large fan, no ductwork, and no central bag house. Insertable filters are integrated into the transfer point enclosure where they can easily return material to the conveying system.

Removes 99.9% by weight of all dry particulate one micron and larger. Effectively handles the heavy concentrations of dust and high volumes of air arising at belt conveyor transfer points.



Dust Bag

A Dust Bag is a passive dust collection system installed above the loading zone to capture dust without an energy-consuming fan. When loading stops, the bag relaxes to return material to the belt. Satin nylon construction withstands positive pressure. Both standard and static-dissipating options are available.




Scan for additional info and resources.

Bag Size in. (mm)	Airflow cfm (l/minute)
12 (300)	Up to 450 (12,750)
24 (600)	Greater than 450 (12,750)



Transfer Point Kits

Transfer Point Kits include modular load zone, settling zone, and stilling zone configurations, providing easier installation and a wider variety of chute options while facilitating future upgrades. The kit simplifies the installation process, reducing the amount of labor required for assembly and allowing the system to be pre-built prior to installation for reduced system downtime. The result is faster installation with less labor and shorter shutdowns, increasing the return on investment (ROI).



Scan code for more resources.

Transfer Point Kits

Each kit is delivered in a single package with every component for assembly included. The kits are able to be assembled prior to shutdown and installation, saving time and money. The kits are also fully modular, making future changes easy without expensive construction projects.

Each kit is either ordered as a load zone, settling zone, or stilling zone. The width and length of the kit are determined by the receiving belt's width and speed and the dust characteristics of the material being transferred. Dusty applications may require a longer settling zone.

Kits are also available to construct a tailbox.

Skirt seal is sold separately as a single piece that runs the entire length of the loading and settling zones.

	Load Zone	Settling Zone	Stilling Zone
Chute Wall Weldment	X	X	X
External Wearliner Assembly	X	X	X
Outer Chute Supports	X	X	X
ApronSeal™ Clamps	X	X	X
Owner's Manual	X	X	X
Installation Hardware	X	X	X
Dust Curtains		X	X
Inner Chute Wall Supports		X	X
Internal Wear Liner	X		
Tail Panel, Clamp, & Rubber Sheet	X		

Load Zone

When material is transferred from one belt to another, it may strike the receiving conveyor with high speed, energy, and force.

The material experiences excessive turbulence in this area. The load zone needs to be designed to control the initial impact of the material while maintaining its structural integrity.

- Internal wear liners protect the chute wall
- External wear liners protect skirting
- Robust chute walls keep the material loaded into the center of the conveyor belt

Stilling Zone

Material must be allowed to settle into a controlled stream onto the conveyor belt. After product is placed onto a belt, this additional enclosed area allows the air to slow and material and dust to settle. The size of the stilling zone is determined by site specifications such as; belt width and speed, chute width, airflow, depth of the material bed, and diameter of the largest lump of material. Dust curtains are strategically placed in this zone with a solid dust curtain at the entry point to reduce the air velocity and a slit curtain at the exit point to reduce dust.

- External wear liners protect skirting
- Dust curtains begin to control airflow
- Chute walls contain the bulk of the material

Settling Zone

The process of transferring material from one belt to another creates airflow which carries dust, creating workplace hazards, regulatory noncompliance, and equipment damage. Additional volume is needed to slow airflow. This is achieved by extending the chute wall height. An aggressive geometric approach is made to dust curtain design that includes a staggered pattern to reduce air velocity and allow agglomerated dust to settle and rejoin the material before it leaves the transfer point.


- Chute walls are extended to help reduce airflow
- External wear liner protects skirting
- Multiple dust curtains reduce airflow



Safety Accessories

Martin Engineering's area guards and roll baskets provide effective engineering controls to achieve regulatory compliance and help keep workers safe from pinch points and overhead hazards around belt conveyor systems.

Martin Engineering's broad range of inspection doors, available in a wide selection of sizes and with options to match application requirements, provide inspection and access points where needed while also effectively and safely sealing and containing airborne dust.



Scan code for more information and resources.

Inspection Doors

The Martin® Inspection Door is dust-tight and allows inspection and access in chutes and other enclosures for belt cleaner maintenance or other service requirements.

The sturdy, low-profile design features a dust-tight rubber seal and can withstand typical positive and negative pressure applications. Simple installation allows doors to either be bolted or welded to the enclosure wall. Doors are also available with an internal guard screen to restrict access and prevent workers from breaking the plane.

Doors available in painted steel, 304 or 316 stainless steel, or rubber. Optional features such as lockable latches, AR500 internal wear liners, and high-temperature seals are also available.



Scan code for additional info and resources.



Visit our website to download our **Foundations™ Books**, industry-standard textbooks for cleaner, safer, and more productive conveyor operation and maintenance, along with e-books covering a variety of specific bulk material handling and material flow topics.

>> foundations.martin-eng.com/book-options

Conveyor Guard

Martin Engineering's mesh panel guards conform to OSHA and MSHA standards and prevent worker exposure to conveyor nip points and pinch point hazards.

Laser cut panels don't present the opportunity for broken welds or sharp edges commonly seen with expanded metal guards while rugged 11 gauge steel provides greater strength, durability, and reliability than lighter-weight metals and plastic. Guards are also available in 304 stainless steel.

Single or double wedge clamps allow panels to be removed and reinstalled quickly and the modular design installs on supplied angle iron structure without attaching to conveyor equipment. Wedge bolts are also available.

Guards are available in several sizes and colors and can be used in a variety of combinations to fit almost any application. Systems can be easily expanded or relocated as needed.



Scan code for additional information and resources.

Return Roller Guard

The Martin® Return Roller Guard features quick release pins which allow access to the grease fittings within the return roller without the need to remove the guard.



Scan code for additional info and resources.



Lightweight metal construction bolts directly to either the side or bottom of the stringer for easy installation with no additional bolts required for assembly. Fits all major roll manufacturers' sizes.

Riveted pins are accessible from both sides and bottom and allow the guard to open quickly and safely for maintenance. Removable end plates provide access to roller bearings.

Return Roller Basket

The Martin® Return Roller Basket is designed to prevent a return roller from falling in case of mechanical failure. Solid steel construction covers all major return roller manufacturers.



Scan code for additional info and resources.




Brackets are included to mount basket directly to either the side or bottom of the stringer and quick-release pins allow easy access.

Open design prevents material buildup in basket while allowing inspection. Baskets are designed to fit all major roll manufacturers' sizes (CEMA B, C, D, & E).

Urethane Chute Patch

The Urethane Chute Patch is a quick and easy way to repair a hole worn into a chute to prevent material from leaking until a permanent repair can be made. This patch can also be used inside the chute to prevent wear. High-strength embedded magnets securely hold the patch in place, eliminating the need for welding and can easily be removed or repositioned if necessary.

Available in 6x6-inch and 12x12-inch sizes.

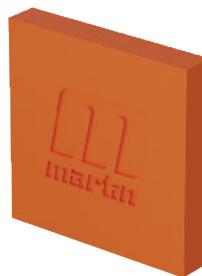

Scan code for additional info and resources.




50 YEARS OF
AIR CANNONS

Air Cannons

Martin Engineering's air cannons apply precisely timed bursts of compressed air to prevent material buildup on interior container walls and obstructions at discharge ports.

Ensuring proper material flow and mitigating buildup avoids unplanned downtime, lost production, and the time and hazards involved with manual cleaning while helping maximize designed production capacity.



Scan code for
more information
and resources.

Hurricane Air Cannon

The Hurricane Air Cannon features an advanced positive pressure, positive firing valve concept that provides more force, uses less air, and simplifies installation and maintenance.

Highly effective discharge strength from high velocity output requires half the air volume of standard air cannons, reducing operating costs.

The complete valve assembly can be removed in one easy step, working from one side of the tank. It can be replaced within minutes to keep your process running. There is no need to ever remove the tank from the vessel for service.

Positive-acting valve eliminates the risk of an accidental discharge while allowing the control solenoid to be positioned as far as 200 feet (60 m) from the tank, keeping solenoids away from harsh conditions and difficult-to-service areas.

Available with 35, 70, and 150L tanks.



Scan code for additional
info and resources.



Visit our online **Foundations™ Learning Center** for free articles, videos, e-books, and blog posts offering a broad variety of information including selection guides, maintenance checklists, troubleshooting tips and tricks, and much more.

>> <https://foundations.martin-eng.com/en/knowledge>

Typhoon Air Cannon

The Typhoon Air Cannon features a hybrid valve concept that provides more force, uses less air, and simplifies maintenance in challenging applications with limited budgets.

Highly effective discharge strength from high velocity output requires half the air volume of standard air cannons, reducing operating costs.

The complete valve assembly can be removed in one easy step, working from one side of the tank. It can be replaced within minutes to keep your process running. There is no need to ever remove the tank from the vessel for service.

Negative pressure firing provides effective performance in challenging applications with limited budgets. Upgrades existing older technology air cannons using normally-open solenoids without the need for replumbing the system.

Available with 35, 70, and 150L tanks.



Scan code for additional info and resources.



Tornado Air Cannon

The Tornado Air Cannon produces better material flow with greater force, faster cycling, and improved safety, firing when the exhaust valve opens in response to a positive surge of air sent by a tripped solenoid valve.

Available in two tank sizes, with a retrofit valve also available, the Tornado Air Cannon is a versatile solution suitable for smaller applications.



Scan code for additional info and resources.



Passport Air Cannon

The Passport Air Cannon is specifically designed for ambient temperature applications to help clear material buildup in hoppers and chutes to maintain proper material flow, eliminating manual cleaning and unplanned downtime and ensuring maximum design capacity and throughput.



Scan code for additional info and resources.



Blow Pipes

This simple pipe solution can be installed at 90 degrees or any custom angle to suit your needs. It comes in mild steel for ambient applications and stainless steel for high-temperature environments. Reliable, versatile, and designed to meet various industrial requirements.

Mild Steel



316 Stainless Steel

NOZZLES AND ACCESSORIES

SMART™ Series Nozzles

The innovative design of SMART™ Series Nozzles eliminates damage to refractory and makes it possible to maintain nozzles without removing air cannons.

Eliminates the time and cost of cutting holes and breaking refractory to replace worn out nozzles.

Replacement is quick and easy; no entry required into the tower or cooler and no need to remove the air cannon tank.

Eliminates improper alignment and provides a wider area of influence than a standard fan nozzle.

Available in straight or "Y" pipe arrangement.



Scan code for additional info and resources.



SMART™ Series Retractable Nozzle 360°

The SMART™ Series Retractable Nozzle 360° extends service life in preheater towers and high-temperature/high-dust applications by pulling the discharge inside the vessel.

The nozzle extends to fire then retracts to protect the exposed tip from extreme heat. Provides 360° of effective cleaning area, making cleaning the center of the wall possible.

The 360° nozzle weldment is serviceable from the outside of the riser duct, so nozzle assembly replacements don't have to wait until the next scheduled outage.

Works with standard air cannons (150L Martin® Hurricane is recommended) and is controlled by a single solenoid.



Scan code for additional info and resources.

Thermo Safety Shield

The Thermo Safety Shield is a slide gate that bolts between an air cannon valve and mounting flange, acting as a safety barrier to allow timely and safe maintenance of air cannon systems. It protects employees from exposure to severe heat, gases, and high temperature material so that maintenance takes place safely and production stays on schedule. The sliding shield operates under tough conditions, yet can be locked out to prevent intrusion.

Available for any air cannon with 4- or 6-inch discharge.



Scan code for additional information and resources.

Nozzles

This product is perfect for cleaning flat surfaces on ductwork, chutes, rock boxes, precipitators, and SCRs. It is versatile and can be used wherever material needs to be reintroduced into the process. The design ensures efficient cleaning and material flow. Ideal for maintaining operational efficiency in various industrial settings.

**Mount Plates**

This product is ideal for use on bins, hoppers, and silos. Its 30-degree angle efficiently directs flow toward the outlet of standard vessels. The drop-through version is specifically designed to penetrate liners such as stainless steel or wear plates. This ensures smooth material flow and prevents blockages.



Scan code for additional information and resources for air cannon nozzles, blow pipes, and mount plates.

Air Cannon Controller

Energizes solenoid valves to control the automatic sequencing and discharge for a system of up to ten Martin® Air Cannons.



Scan for additional info and resources.

Air Cannon X-Stand

The X-Stand is the perfect solution for mounting your air cannon in challenging environments. Designed to fit 35L, 70L, and 150L air cannons, it allows you to position cannons outside high-heat areas or in smaller, hard-to-reach spaces.


Stackable both horizontally and vertically, the X-Stand keeps the cannon safely out of the way, providing easy access to your vessel's walls for maintenance and inspection. Durable and versatile, it's the ideal mount for optimizing your air cannon's performance.



Vibration Solutions

Martin Engineering's comprehensive range of industrial vibrators apply rotary or linear vibratory force to prevent material buildup on interior container walls to maintain effective and efficient material flow. Typical applications include conveying or feeding, screening, draining, dewatering, product sizing, compaction, testing of components, as well as bin, hopper, and chute evacuation.

Ensuring proper material flow and mitigating buildup avoids unplanned downtime and lost production and the time and hazards involved with manual cleaning while maximizing intended production capacity.



Scan code for
more information
and resources.

Ball Vibrators

Powered by compressed air, these long-lasting ball vibrators contain a chrome ball bearing that spins along a circular track inside the housing. The rapid rotational movement of the ball bearing applies centrifugal force to the casing, causing it to vibrate. Ball vibrators are an economical vibration solution that contains only one moving part, which means they require zero ongoing maintenance.

Available in a wide range of sizes, porting, and mounting options, ball vibrators deliver a high ratio of force relative to their weight, so they are powerful enough for large jobs such as eliminating material blockages from rigid bins, chutes, and hoppers. They are also ideal for small jobs such as moving small parts in assembly processes.



Scan code
for additional
info and
resources.



Visit our **On-Demand Webinar Library** for dozens of free on-demand video recordings covering a wide variety of topics including belt conveyor optimization, carryback and belt cleaning, material flow, dust control, and safety and culture.
>> foundations.martin-eng.com/webinars-on-demand

Roller Vibrators

Martin Engineering's long-lasting roller vibrators contain a steel, ring-shaped roller that spins around a steel shaft, powered by compressed air. The rapid rotational movement of the roller produces multiple vibrations with each rotation. Roller vibrators are an economical vibration solution for applications that require high force-to-weight ratios.



Scan code
for additional
info and
resources.

Turbine Vibrators

Martin Engineering's pneumatic turbine vibrators contain an unbalanced turbine wheel that spins inside the casing. The rapid, unbalanced rotational movement of the turbine applies centrifugal force to the casing, producing the vibratory force. These vibrators use very little compressed air relative to the force they deliver, so the long-term cost of ownership is low.



Scan code
for additional
info and
resources.

Available in a variety of sizes and strengths, roller vibrators deliver a high level of vibratory force and are ideal for unloading railcars and compacting both concrete and refractory. Roller vibrators are the only pneumatic option that delivers both high frequency and high amplitude. The rugged epoxy-coated cast design makes them perfect for continuous operation, even in dusty, wet, and harsh environments.

Turbine vibrators produce noise levels well below OSHA requirements, so they are an effective solution for noise-sensitive areas. They are ideal for applications such as portioning ingredients in food processing plants and feeding small parts made of plastic or metal onto a feeding tray, as well as conveying materials or loose items in the chemical and pharmaceutical industries.

MM & MC Series Electric Vibrators

Martin Engineering is the only USA manufacturer of continuous-duty, high-output/low-frequency industrial vibrators guaranteed for 3 years.

MM and MC Series Electric Vibrators are engineered for continuous duty and feature C4 clearance roller bearings. Dust-tight, water-tight, O-ring seals and machined surfaces provide an IP 66 enclosure rating to protect against the entry of dust and water.

Drives are fully interchangeable with other major manufacturers.



Scan code
for info and
resources.

VIBRATORS

AP5 Series Piston Vibrators

An economical solution to eliminate the pounding, poking, and hammering of hoppers, the AP5 Series Piston Vibrators help maintain material flow and reduce bottlenecks.

Limited maintenance required for life of the vibrator when used with filtered and lubricated air supply.

Variable control of force and frequency to meet a variety of material conditions.

Can be a bolt-in direct replacement for nearly all piston vibrators on the market.

Comes standard with exhaust mufflers to attenuate the exhaust noise and aid in preventing dust and dirt from entering the vibrator.



Scan code for additional info and resources.



Visit our website to download our **Foundations™ Books**, industry-standard textbooks for cleaner, safer, and more productive conveyor operation and maintenance, along with e-books covering a variety of specific bulk material handling and material flow topics.

>> foundations.martin-eng.com/book-options

PV Series Piston Vibrators

PV Piston Vibrators deliver powerful linear force to keep stubborn materials flowing from bins, hoppers, chutes, and railcars. Five sizes available to suit material, storage system, and air supply. Use with permanent or portable mounts.

For increased durability, consider the Lempcoloy sleeve option for longer working life and severe-duty applications like high-temp environments and continuous operation. Once worn, just replace the sleeve instead of the entire vibrator assembly.



Scan code for more info and resources.

Thumper™ Timed Impactors

Thumper™ Series Timed Impactors deliver powerful blows at controlled intervals, producing a sledge hammer effect without hopper damage or manual labor.

This pneumatic impactor is controlled by a timer to deliver powerful industrial vibration to keep production flowing and reduce material buildups.

Controls noise and prevents vessel damage while handling heavy work loads with limited air supply. Optional timers control the number of blows per minute.



Scan code for more info and resources.



Electric Screen Vibrators

Martin® Screen Vibrators are the preferred replacement for Derrick® shaker motors and are designed to serve as a direct retrofit for Derrick® shaker screens, requiring no modifications or adapters. Sturdy construction is designed for long performance life and serviceability and carries an industry-leading 3-year warranty.

Units provide up to 16,500 pounds of centrifugal force and high-strength cast aluminum cases are IP 66 dust-tight/water-tight. Low-maintenance units require only periodic lubrication of the long-life cylindrical roller bearings. Provided with adjustable eccentric weights to match specific performance requirements. Explosion-proof models bear the ETL, cETL, ATEX, and IECEx marks for use in hazardous locations.



Scan code for
additional information
and resources.



ASEAN MAP

SERVICE AREA OF MARTIN ENGINEERING INDONESIA

MYANMAR

LAOS

THAILAND

CAMBODIA

VIETNAM

PHILIPINES

PHILIPPINES

MYANMAR

LAOS

THAILAND

CAMBODIA

SINGAPORE

INDONESIA

BRUNEI DARUSSALAM

PHILIPINES

VIETNAM

MYANMAR


LAOS

THAILAND



Services and Training

At Martin Engineering Indonesia (Legal: PT. Martin Supra Engineering), we offer a variety of services and training to enhance the efficiency, safety, and lifespan of your bulk material handling systems. From conveyor inspections and maintenance programs like Walk the Belt™ to addressing issues such as dust control and belt tracking, our goal is to optimize your operations. We also provide comprehensive training whether on-site or online to equip your team with the knowledge they need for maintaining equipment and following best practices.



Scan code for
more information
and resources.

Walk The Belt™

This program offers free, customized conveyor system inspections to identify and address issues like carryback, mistracking, and dust. These inspections are conducted by highly-trained technicians, who then provide a detailed report with recommendations to improve performance and extend equipment life. This proactive maintenance approach reduces unscheduled downtime and enhances safety, allowing plant managers to focus on core operations.



Foundations™ Training

Martin Engineering's Foundations™ training program was conceived as a way to package our accumulated knowledge and deliver it in an impactful, engaging way. Classes are based on our two highly-regarded books, *Foundations™* and *Foundations™ for Conveyor Safety*. The program addresses many key topics to improve safety and productivity.





martin



PRODUCT CATALOG

MARTIN ENGINEERING INDONESIA

(Legal: PT Martin Supra Engineering)

Pergudangan Bandara Mas Blok A8 No. 9

Tangerang - Indonesia

+62 21 55912842-3

info@martinsupra.co.id

martin-eng.co.id

L4203-ID-02/25

Patents and patents pending. ® Registered trademark of Martin Engineering Company in the US and other select locations. © 2025 Martin Engineering Company.

