



Martin® External Wear Liner


Standard

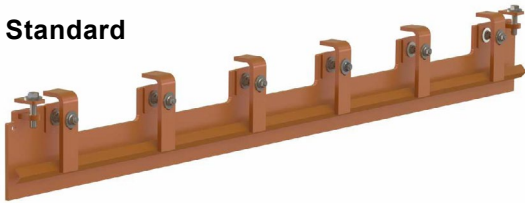

Low Profile

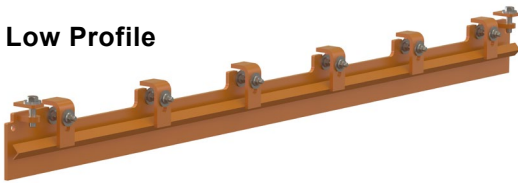

Adapter Kit



Installed outside conveyor transfer point skirtboards, **Martin® External Wear Liner** is an economical upgrade that improves skirtboard sealing and prevents spillage. Wear liner can typically be installed without requiring work inside chute or interfering with existing chute supports.

Martin® External Wear Liner is available with standard Martin® ApronSeal™ angle clamp or Martin® ApronSeal™ low-profile angle clamp. It can easily be installed on existing studs in applications already using Martin® ApronSeal™ skirting and clamps.

BENEFITS

Improves Sealing

Keep the burden of cargo away from sealing system.

Simple Installation

Wear liner plates mount to the outside of existing transfer point skirtboard, without interfering with existing supports.

Easy Adjustment

Jack screws provide precise adjustment of wear liner to reduce spillage.

Suits a variety of cargo and conditions

The wear areas are available in 10mm thick wear resistant steel (HARDOX® 500 or comparable) or stainless steel (1.4571). Fits conveyors with trough angles from flat to 35°. Standard lengths are 500 mm, 1.000 mm and 2.000 mm.

Compatibility of side sealings

The external Wear Liner can be combined with Martin® ApronSeal™ Double Skirting PN 100873+E, Martin® ApronSeal™ Double Skirting HD PN 100861+E, Martin® ApronSeal™ Single Skirting PN 100724+E and Martin® ApronSeal™ Single Skirting HD PN 100723+E.

Improves Maintenance


Replacing worn external wear liner requires minimal welding and no chute entry.

SPECIFICATIONS

Temperature range C°	Throughing angle	Reversing
-30 – 150 °C	0° - 35°	yes

Item	Part Number
External Wear Liner	41778-XXXXXX
External Wear Liner Low Profile	41816-XXXXXX
External Wear Liner Adapter Kit	41790-XXXX

External Wear Liner 41778-XXXXXX

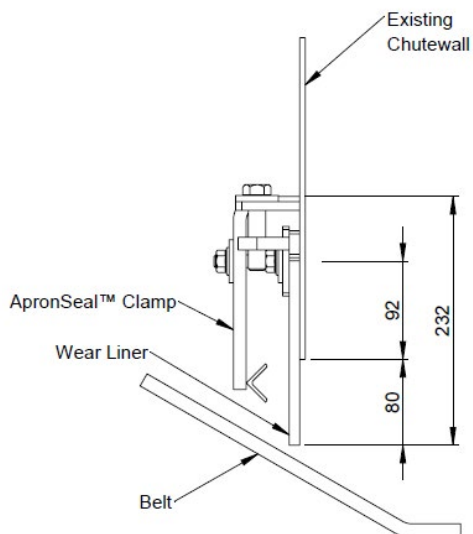

Martin® External Wear Liner

41778 - XX X XX X

P/N 5-Digit Prefix _____
 Wear Liner Length in dm _____
 Wear Liner Material _____
 Material Thickness in mm _____
 ApronSeal™ Clamp _____

WEAR LINER LENGTH

05: 500 mm
 10: 1000 mm
 20: 2000 mm

WEAR LINER MATERIAL

5: Hardox® 500 painted (RAL 2004)
 S: Stainless Steel (1.4571)


MATERIAL THICKNESS

10: 10 mm

APRONSEAL™ CLAMP

S: with Standard Clamp
 0: without clamp

External Wear Liner Low Profile 41816-XXXXXX

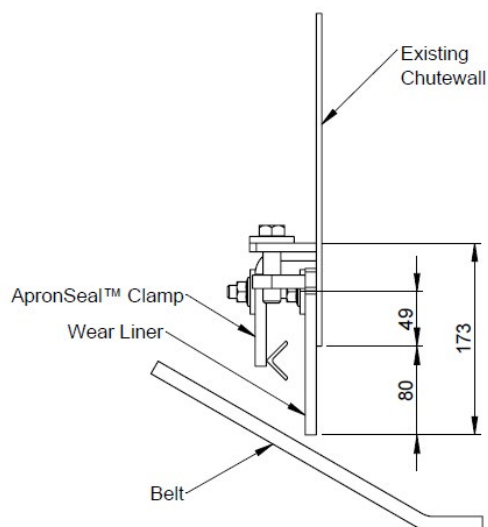

Martin® External Wear Liner Low Profile

41816- XX X XX X

P/N 5-Digit Prefix _____
 Wear Liner Length in dm _____
 Wear Liner Material _____
 Material Thickness in mm _____
 ApronSeal™ Clamp _____

WEAR LINER LENGTH

05: 500 mm
 10: 1000 mm
 20: 2000 mm

WEAR LINER MATERIAL

5: Hardox® 500 painted (RAL 2004)
 S: Stainless Steel (1.4571)

MATERIAL THICKNESS

10: 10 mm

APRONSEAL™ CLAMP

S: with Standard Clamp
 0: without clamp

Martin® External Wear Liner Adapter Kit

41790 - X XX X

P/N 5-Digit Prefix _____
 Wear Liner Material _____
 Material Thickness in mm _____
 Side _____

WEAR LINER MATERIAL

5: Hardox® 500 painted (RAL 2004)
 S: Stainless Steel (1.4571)

MATERIAL THICKNESS

10: 10 mm

SIDE

L: Left
 R: Right
 0: not welded

Hardox® is a trademark of SSAB AB



Martin Engineering Ltd
 The Tangent Hub, Unit 33,
 Weighbridge Rd, Shirebrook,
 Mansfield, NG20 8RX, UK
 Ph.: 0044 (0)115 946 4746
 info@martin-eng.co.uk | www.martin-eng.co.uk