


Martin® Roller Tracker™

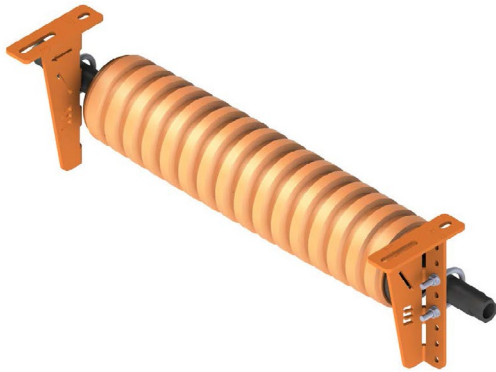

The Martin® Roller Trackers™ are used on belt conveyors and serve to reduce the lateral deflection of conveyor belts. Depending on the design, they can be used on the lower belt


Benefits

- Ease of installation and low maintenance
- A vibration free rolling action
- A design that meets customer needs
- Superior bearings used for superior quality
- Polyurethane lagging improves durability
- No contact with edge of belt

Technical data

Belt speed max.	5 m/s
Belt width min./max.	400 - 1600 mm
Shaft diameter	Ø50 mm
Roller diameter	188 - 220 mm
Temperature range:	-30 – 60 °C
Reversing operation:	Yes

Part no.	Belt width		DIM A	DIM B	DIM C	DIM D
	[mm]	[inch]	[mm]	[mm]	[mm]	[mm]
MRT-0400	400	16	838	634	471	188
MRT-0500	500	20	940	736	568	
MRT-0600	600	24	1042	838	666	
MRT-0750	750	30	1194	990	841	
MRT-0900	900	36	1348	1144	961	
MRT1050	1050	42	1500	1296	1109	220
MRT-1200	1200	48	1652	1448	1258	
MRT-1350	1350	54	1804	1600	1455	
MRT-1500	1500	60	1956	1752	1602	
MRT-1600	1600	64	2139	1940	1698	

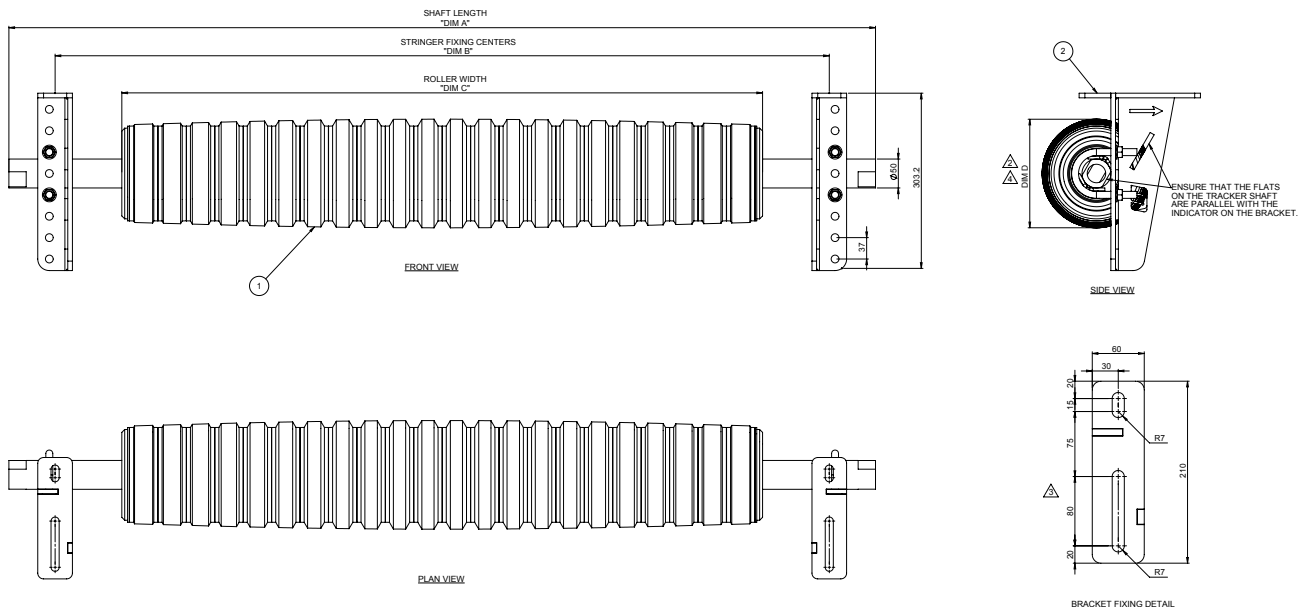

Martin Engineering Ltd
 The Tangent Hub, Unit 33,
 Weighbridge Rd, Shirebrook,
 Mansfield, NG20 8RX, UK
 Ph.: 0044 (0)115 946 4746 i
 nfo@martin-eng.co.uk | www.martin-eng.co.uk



Subject to technical modifications - Quality management system certified by DNV - ISO 9001