


Martin® VPlow Modular

The **Martin® VPlow HD** is an economical solution for tail protection in medium- to heavy-duty applications. Can be used on belts with belt speeds up to 900 fpm (4.6 m/sec).

Easily replaceable blade provides 2 in. (50 mm) of wear life. Blade is available in long-wearing 90 Shore A Durometer urethane.

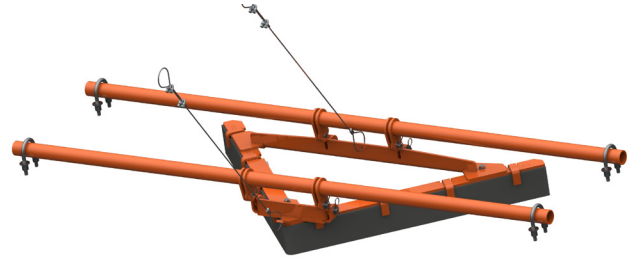

NOMENCLATURE — CPVHAS XX X XX X X X

1. Part Number Prefix
2. The first XX indicates belt width.
XX = indicates inches (18–96 inches)
A8 = 108 inches
C0 = 120 inches
3. The next X indicates blade type:
O = Orange Urethane Blade
G = Green Urethane Blade
4. The next XX indicates front hanger arm:
01 = 2.56 in. (65 mm)
02 = 6.89 in. (175 mm)
03 = 7.87 in. (200 mm)
04 = 11.81 in. (300 mm)
5. The next X indicates hanger pipes:
C = Compact 3 piece
6. The next X indicates material:
T = Painted Mild Steel
7. The next X indicates assembly options:
U = Unassembled

Blade Type	P/N	
Orange Urethane	Blade Nose	CPVHB001O
	Blade Sides	CPVHBSXXO*
Green Urethane	Blade Nose	CPVHB001G
	Blade Sides	CPVHBSXXG*

*XX indicates belt width

BENEFITS

- **Modular Design**
Bolt together frame for easier installation.
- **One Piece Urethane Nose**
Easy replacement and long lasting urethane life.
- **Longer Wear Life**
1 inch thick urethane side blades for longer wear and lower friction.
- **Rugged Frame Construction**
Thick steel frame for the toughest applications that also provides the ballast for blade tension.



Martin Engineering Ltd
The Tangent Hub, Unit 33,
Weighbridge Rd, Shirebrook,
Mansfield, NG20 8RX, UK
Ph.: 0044 (0)115 946 4746 i
nfo@martin-eng.co.uk | www.martin-eng.co.uk

