


CleanScrape® Secondary Cleaner

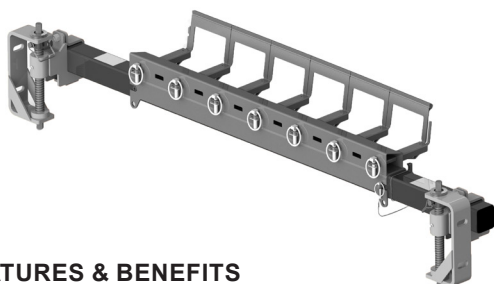

The **CleanScrape® Secondary Cleaner** is a secondary cleaners available in stainless steel or partly mild steel assembly featuring independent 6-inch wide blades with carbide tips. Each blade tip is supported on spring loaded arms at both ends. The load springs allow independent blade rotation back and forward as well as up and down. This “range-of-motion” provides equal load pressure across each blade, absorbs obstructions, and conforms to ever-changing belt undulations.


FEATURES & BENEFITS

- Optimum cleaning results
- “Free Flow” design allows for material to pass through arms
- The Mainframe design compensates for belt wear in the center
- Low Blade-to-Belt pressure
- Simple installation inside or outside of chute
- Removed material returns to main flow
- Requires less tensioning over lifespan
- Easy cartridge removal
- Easy adjustment of cleaning pressure


SPECIFICATIONS

Cleaner Type	Belt Width in. (mm)	
C2CX SXXXXXXXX	18–96 (457–2438)	
Maximum Belt Speed fpm (m/sec)		Replacement Blade Cartridge
Vulcanized Splice	Mechanical Splice	
900 (5)	600 (3)	C2CCSXXXXXXXX

CLEANSCAPE® SECONDARY CLEANER CARTRIDGE

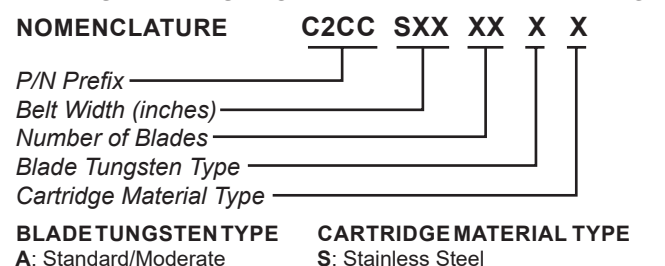

CLEANSCAPE® SECONDARY CLEANER

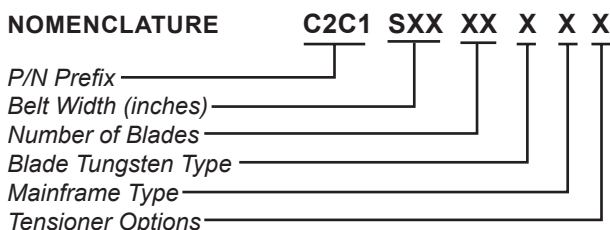

- BLADE TUNGSTEN TYPE** **TENSIONER OPTIONS**
A: Standard/Moderate **0:** No Tensioner
S: Stainless Steel **S:** Stainless Steel
T: Steel **T:** Steel

- MAINFRAME TYPE*** **DOOR OPTIONS**
E: Extended Stainless Steel **0:** No Door
Z: Extended Painted Steel
S: Stainless Steel
P: Painted Steel

*Extended mainframe is 18 in. (457 mm) longer than standard mainframe.



Martin Engineering Ltd
 The Tangent Hub, Unit 33,
 Weighbridge Rd, Shirebrook,
 Mansfield, NG20 8RX, UK
 Ph.: 0044 (0)115 946 4746 i
 nfo@martin-eng.co.uk | www.martin-eng.co.uk

