

Martin® QC1+™ Cleaner PV with One-Piece Mainframe



The [Martin® QC1+™ Cleaner PV](#) introduces the next generation of belt cleaning technology.

The economically efficient system consisting of pre-cleaner and tensioner combines efficient cleaning with a long wear life and minimum maintenance effort.


SPECIFICATIONS

Belt Widths (mm)	Pulley Diameter (mm)	Maximum Belt Speed (m/sec.)	Operating Temperature* (°C)	Reversing operation**
500 - 1800	300 - 400	2,5	-40 - +150	Yes

*Depending on polyurethane type

**Reversing operation is possible but has no cleaning effect.

NOMENCLATURE

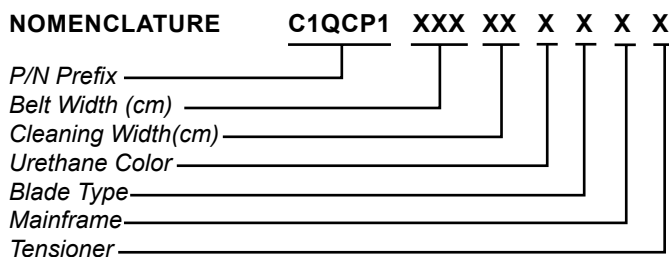

FEATURES & BENEFITS

- Same ease of installation as original Martin® QC1™ Cleaners, maintaining standard installation and service costs.
- Utilizes Martin's highly effective, patented CARP profile, ensuring the highest level of cleaning performance expected from a Martin® Belt Cleaner.

BELT WIDTH

XXX: indicates belt width in cm (050 - 180)

CLEANING WIDTH*

10: Belt width - 10 cm
20: Belt width - 20 cm
30: Belt width - 30 cm
40: Belt width - 40 cm
50: Belt width - 50 cm

URETHANE COLOR

0: No Blade
B: Brown
G: Green
O: Orange

BLADE TYPE

0: No Blade/Segmented
1: Solid

MAINFRAME

A: Stainless Steel
B: Extended Stainless Steel
E: Extended Painted Steel
P: Painted Steel


TENSIONER

T: Martin® Twist Tensioner (P/N 38850)
S: Martin® Spring Tensioner (P/N 38180)
P: Martin® Spring Tensioner Stainless Steel (P/N 38180-SS)
0: No tensioner

* Available Cleaning Width (= Blade Width) Options are shown in the table on page 2 or drawing C1QCP1XXXXXXXXXX

TECHNICAL DATA SHEET

MOUNTING LOCATION

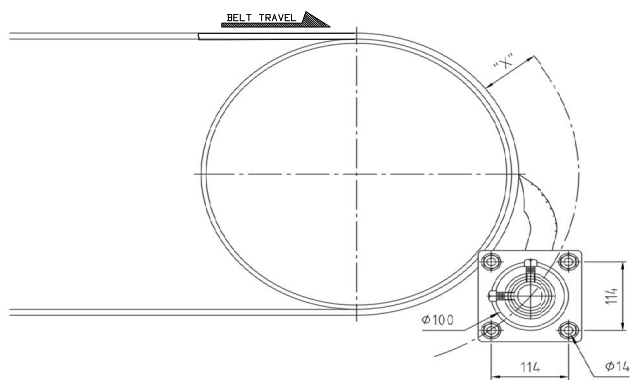


Pulley Diameter* (mm)	Mounting Location X (mm)
300-400	76
*(Including pulley lining and conveyor belt)	

Use segmented blade on crowned head pulley.

DIMENSIONS

BELT WIDTH (MM)	CLEANING WIDTH: BELT WIDTH – XX CM	CLEANING WIDTH (A) (MM)	MAINFRAME LENGTH (B) STANDARD (MM)	MAINFRAME LENGTH (B) EXTENDED (MM)
500	10	400	1.300	1.700
	20	300		
600	10	500	1.400	1.800
	20	400		
650	10	550	1.450	1.850
	20	450		
750	10	650	1.550	1.950
	20	550		
800	10	700	1.600	2.000
	20	600		
900	10	700	1.700	2.100
	20	600		
1.000	20	800	1.800	2.200
	30	700		
1.050	20	850	1.850	2.250
	30	750		
1.200	20	1.000	2.000	2.400
	40	800		
1.350	20	1.150	2.150	2.550
	40	950		
1.400	20	1.200	2.200	2.600
	40	1.000		
1.500	20	1.300	2.300	2.700
	50	1.000		
1.600	20	1.400	2.400	2.800
	50	1.100		
1.650	20	1.450	2.450	2.850
	50	1.150		
1.800	20	1.600	2.600	3.000
	50	1.300		

Note: Dimension A equals belt width minus XX cm.
Dual Tensioners are required for belt widths greater than 1400 mm.

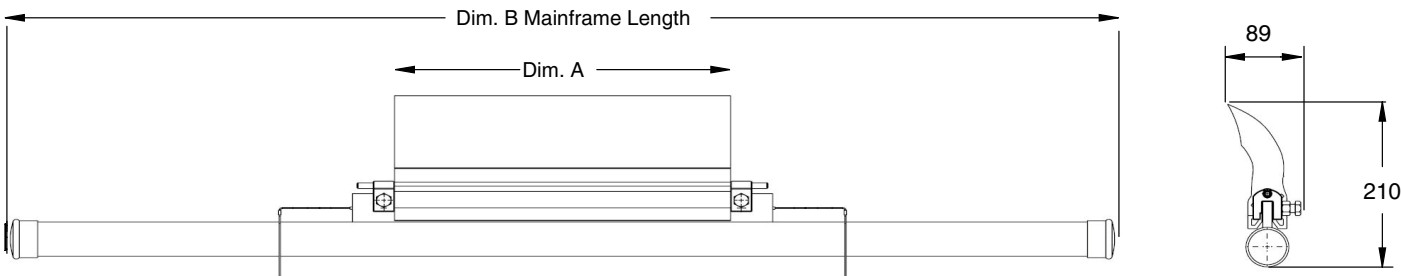


Problem Solved™ GUARANTEED!

Form No. L4135UK-02/25
© Martin Engineering Company 2025

TECHNICAL DATA SHEET

REPLACEMENT BLADE NOMENCLATURE

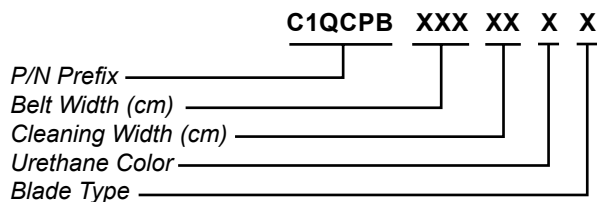

BELT WIDTH

XXX: indicates belt width in cm (050 - 180)

URETHANE COLOR

B: Brown
G: Green
O: Orange

BLADE WIDTH*

10: Belt width - 10 cm
20: Belt width - 20 cm
30: Belt width - 30 cm
40: Belt width - 40 cm
50: Belt width - 50 cm

BLADE TYPE

0: Segmented
1: Solid

**Available Blade Width (=Cleaning Width) Options are shown in the table on page 2 or drawing C1QCP1XXXXXXXXXX*

RECOMMENDED TENSIONERS

Tensioner	P/N
Martin® Twist Tensioner	38850
Martin® HD Twist Dual Tensioner	38850-2

FREQUENTLY ASKED QUESTIONS

My Pre-Cleaner keeps flipping through.

*The mounting location may be too far away from the belt. Relocate to the proper dimension.
Replace the mainframe if they are bent.*

My Pre-Cleaner is wearing more in the center of the blade.

The blade is too wide for this application. Replace with a shorter length blade.



Martin Engineering Ltd

The Tangent Hub, Unit 33,
Weighbridge Rd, Shirebrook,
Mansfield, NG20 8RX, UK
Ph.: 0044 (0)115 946 4746
info@martin-eng.co.uk | www.martin-eng.co.uk