

Martin[®] Hurricane Air cannon

The Martin® Hurricane Air Cannon with its new valve concept simplifies installation and maintenance.


This positive-acting valve, which is actived by an positive surge of air sent by a solenoid valve delivers more force output and uses less air than an comparable Martin® XHV air cannon.




Features


- More force output
 Working pressure up to 10 bar possible
- One-step maintenance
 Complete valve can be removed without dismounting of the tank
- Suitable for high-temperature applications
 High temperatures up to +150°C and also low
 temperatures up to -30°C possible
- Compact design

Performance Data

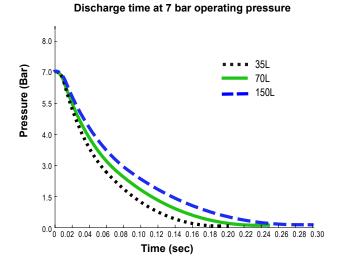


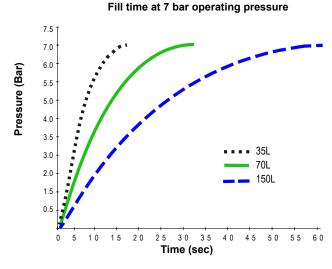

TECHNICAL DATASHEET

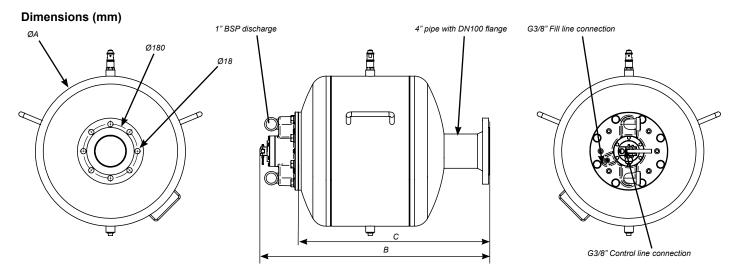

Modell	Part no.	A mm	B mm	C mm	Weight kg
Hurricane 35L	38005-035-XXXXX+E	400	665	541	55
Hurricane 70L	38005-070-XXXXX+E	500	713	588	69
Hurricane 150L	38005-150-XXXXX+E	600	955	830	104

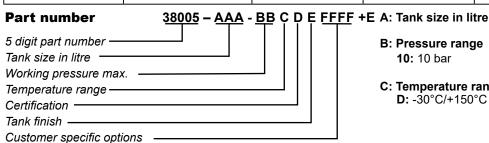

B: Pressure range 10: 10 bar

C: Temperature range D: -30°C/+150°C

D: Certification

C: CE certification

G: RTN (GOST-R) certification

S: SANS (South-African National Standard)

E: Tank finish

P: Powder-coated (RAL 2004)

C: Special painted C5M (RAL 2004)

Z: Zinc plated

Air volume in liter (Norm air*)

Air pressure (Relative) Bar	BB4 - 35 Litre	BB4 - 70 Litre	BB4 - 150 Litre
1	35	70	150
4,0	140	280	600
6,0	210	420	900
8,0	280	560	1250
10,0	350	700	1500

^{*}Norm air (acc. to ISO 2553) rounded at an temperature of 15°C and an air pressure of 1013 hPA

Note

The air cannon tanks are manufactured according to EC guideline 2014/29/EU. For corrosion protection, the air cannon tanks are painted (RAL 3009) from the inside and powder-coated (RAL 2004) from the outside.

Guaranteed engineering and installation of Hurricane air cannons is available from Martin Services. Maintenance is also available from Martin Service Technicians. Certified drawings of air cannon systems installations are available from Martin Engineering. Additional certifications as RTN (formerly GOST-R), ASME and others are also possible on request.

For further information, contact Martin Engineering at +27 13 656 5135 or visit our website www.martin-eng.co.za



Martin Engineering Africa

Cnr Antwerpen & Arnhemsingel street Die Heuwel, Emalahleni, South-Africa

Ph.: +27 13 656 5135 Fax +27 13 656 5129

feedback@martin-eng.com | www.martin-eng.co.za





Subject to change without prior noice. Quality managment system certified according to DNV - ISO 9001