


Martin® QB1™ Cleaner HD

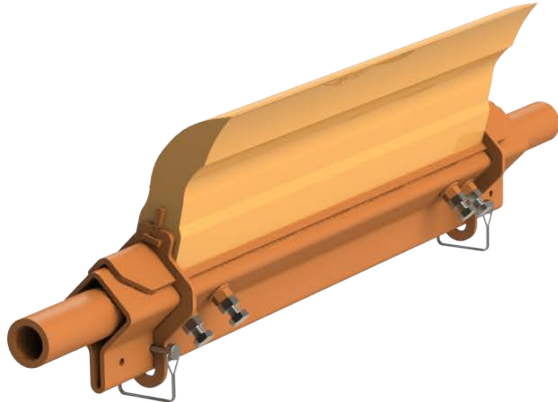

The **Martin® QB1™ Cleaner HD** introduces the next generation of belt cleaning technology.

A truly revolutionary innovation in belt cleaning design, the QB1™ Cleaner HD provides the cleanest belt and longest blade life—at the lowest cost.

FEATURES & BENEFITS

- Same ease of installation as current Martin® QC1™ Cleaners, maintaining standard installation and service costs.
- Utilizes Martin's highly effective, patented CARP profile, ensuring the highest level of cleaning performance expected from a Martin® Belt Cleaner.
- Utilizes Martin's innovative modular design principles to reduce component surface exposure to material flow, minimizing material build-up and the resulting clean-up costs, production interruptions and safety concerns.

SPECIFICATIONS


Maximum Belt Speed fpm (m/sec)	Maximum Service Temperature	Pulley Diameter** in. (mm)	Mounting Location in. (mm)	Wear Life* in. (mm)	Wear Volume (per inch of blade) in³ (cm³)
900 (4.6)	160°F (70°C) Continuous 180°F (82°C) Intermittent	16–22 (406–559)	3.5 (89)	4.5 (114)	6.53 (107)

* Amount of usable blade

** Pulley diameter 23 in. (584 mm) and greater: contact your Martin Engineering representative.

High-performance urethanes are available; see your Martin Engineering representative for assistance in specifying non-standard products. Refer to Form No. L3375.

NOMENCLATURE

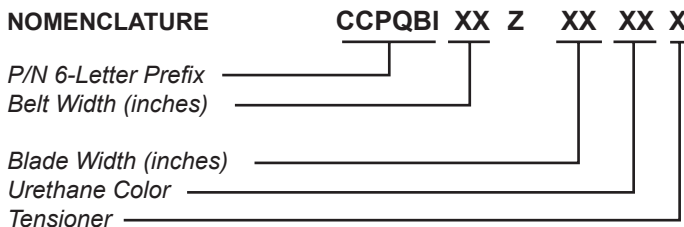

URETHANE COLOUR


BR: Brown
NB: Navy Blue
GR: Green
CL: Tan
OR: Orange

TENSIONER

T: Martin® Twist Tensioner
S: Martin® Spring Tensioner

Use segmented blade on crowned head pulley.

MOUNTING LOCATION

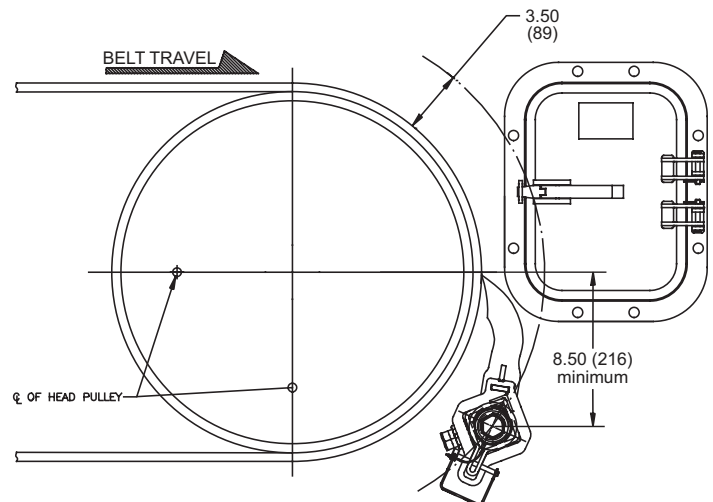


TECHNICAL DATA SHEET

DIMENSIONS -- in. (mm)

* Tensioner not included

Belt Width in. (mm)	Mainframe Length (B) in. (mm)	Belt Coverage (A) Belt Width Less 6" in. (mm)	Shipping Weight* lb. (kg)	Belt Coverage (A) Belt Width Less 2" in. (mm)	Shipping Weight* lb. (kg)
18 (400-500)	44 (1118)	12 (305)	40 (18)	16 (406)	43 (20)
24 (500-650)	50 (1270)	18 (457)	51 (23)	22 (559)	53 (24)
30 (650-800)	62 (1575)	24 (610)	63 (29)	28 (711)	66 (30)
36 (800-1000)	68 (1727)	30 (762)	71 (32)	34 (864)	73 (33)
42 (1000-1200)	74 (1880)	36 (914)	78 (35)	40 (1016)	81 (37)
48 (1200-1400)	80 (2032)	42 (1067)	86 (39)	46 (1168)	89 (40)
54 (1400-1600)	86 (2184)	48 (1219)	94 (43)	52 (1321)	96 (44)
60 (1600-1700)	98 (2489)	54 (1372)	106 (48)	58 (1473)	109 (49)
66 (1700-1800)	104 (2642)	60 (1524)	114 (52)	64 (1626)	116 (53)
72 (1800-2000)	110 (2794)	66 (1676)	121 (55)	70 (1778)	124 (56)
84 (2000-2200)	123 (3124)	78 (1981)	114 (52)	82 (2083)	116 (53)
96 (2200-2400)	135 (3429)	90 (2286)	135 (61)	94 (2388)	137 (62)

Note: Dual Tensioners are required for belt widths 54 in. (1350 mm) and greater.

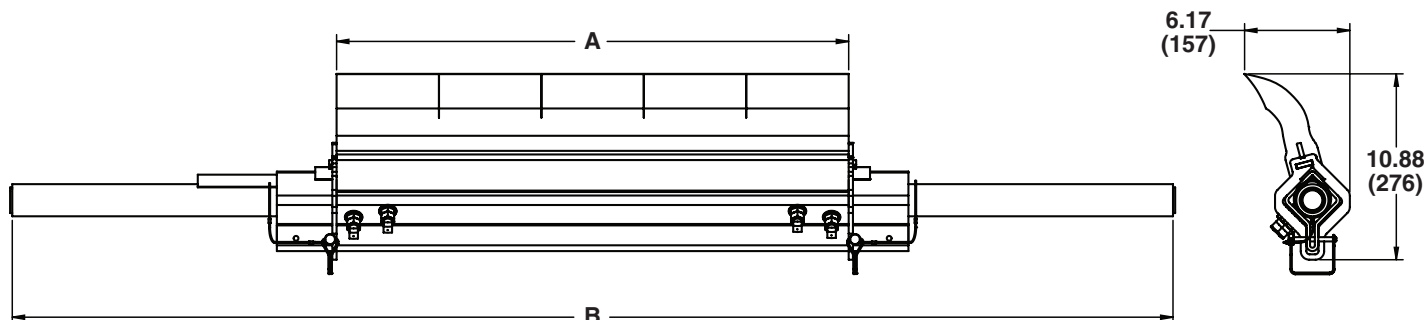

RECOMMENDED TENSIONERS & REPLACEMENT BLADES

Tensioner	P/N
Martin® Twist Tensioner	38850
Martin® Spring Tensioner	SGIST0I00SA
Martin® Dual Spring Tensioner	SGIDT0I00SA

Replacement Blade P/N
CCPQB10XXXX
XX - Belt Width in inches
XX - Urethane Colour

ACCESSORIES

Part	P/N
Martin® Steel Inspection Door	CYA-1218
Martin® Hanger Mount Standard Assembly	27382

FREQUENTLY ASKED QUESTIONS

My Pre-Cleaner keeps flipping through.

The mounting location may be too far away from the belt. Relocate to the proper dimension.
Replace the mainframe or end weldments if they are bent.

My Pre-Cleaner is wearing more in the center of the blade.

The blade is too wide for this application. Replace with a shorter length blade.



Martin Engineering Africa
Cnr Antwerpen St & Arnheimsingel
Die Heuwel, Witbank
Tel +27 13 656 5135
Fax +27 13 656 5129
www.martin-eng.co.za
feedback@martin-eng.com



Problem Solved™ GUARANTEED!

Form No. L4021-ZA Revised 05/16, 07/19, 07/23
© Martin Engineering Company 2015, 2016, 2019, 2023