Martin® V Plough

BENEFITS

- Simple centre-mount suspension system for:
  - o Greatly simplified installation.
  - o Maximum felxibility to accomodate changing lateral belt angles.
  - o Patented spring-loaded rear mount ensures constant positive pressure on belt, irresepctive of belt angle.
  - o Positive pressure of plough on belt surface
  - o A simple arrestor chain on rear mount prevents the 'V' frame from contacting the belt surface, when blade is worn out.
- Low design heigh allows plough to be installed in minimum space.
- Lightweight split 'V' frame makes for easy installation.
- High quality powder coated finish on all metal parts ensures optimum corrosion protection

DIMENSIONS 600 - 2400 BELT WIDTH

BELT WIDTH	DIM "A"	DIM "B"	DIM "C"	DIM "D"	DIM "E" (mm)		DIM "F" (Approx.) (mm)	Dim "G" (Dia. mm)	Dim "H" (mm)
					MIN.	MAX.			
600	637	555	466	100	170	415	650	48.3	900
750	786	685	573						1100
900	935	815	680						1280
1050	1090	950	790	150	235	480	970	60.3	1400
1200	1329	1080	897						1580
1350	1388	1210	1003						1700
1500	1537	1340	1109				1380		1880
1650	1686	1470	1216						2030
1800	1836	1600	1322						2180
2000	2035	1774	1453				1620		2380
2100	2134	1860	1524						2480
2200	2237	1950	1598						2580
2400	2438	2125	1741						2790

Form No. L3298-ZA Revised 05/16
© Martin Engineering Company 2014,2016

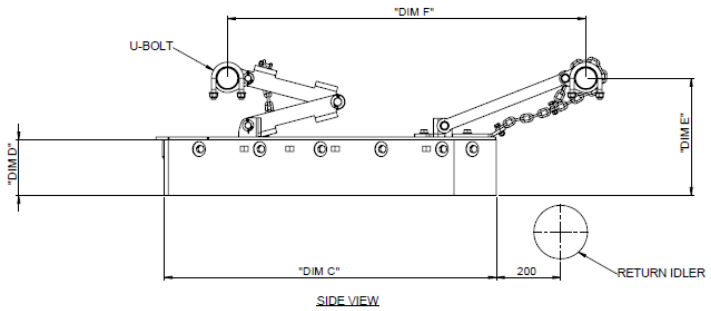

SIDE VIEW

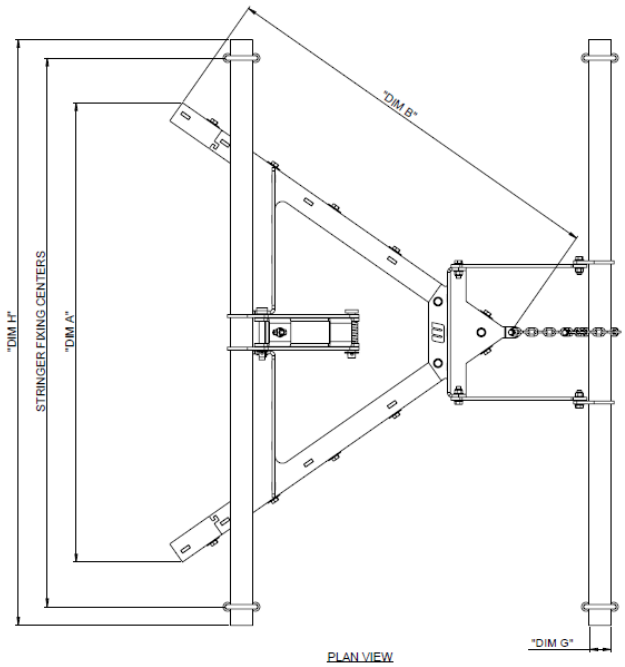

PLAN VIEW

1. Frame
2. Front Link Anchor
3. Tension Scissor
4. Anchor Pipe
5. Anchor Pipe
6. Poly Nose Cone
7. Poly Blade

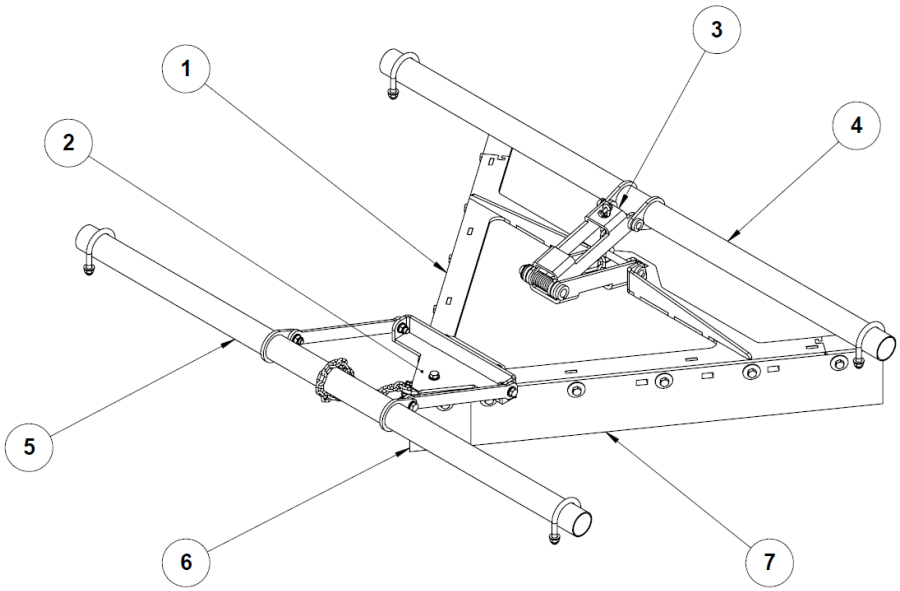

Martin Engineering RSA
Cnr Antwerpen str & Arnhemsingel
Die Heuwel, Witbank, Emalahleni
Tel +27 13 656 5135
Fax +27 13 656 5129
www.martin-eng.co.za

Subject to change without prior notice.
Quality Management System Certified by DNV - ISO 9001
This technology is protected by US Patent No. 8.8888.888

Form No. L3298-ZA Revised 05/16
© Martin Engineering Company 2014,2016