


Martin® H2O Cleaner

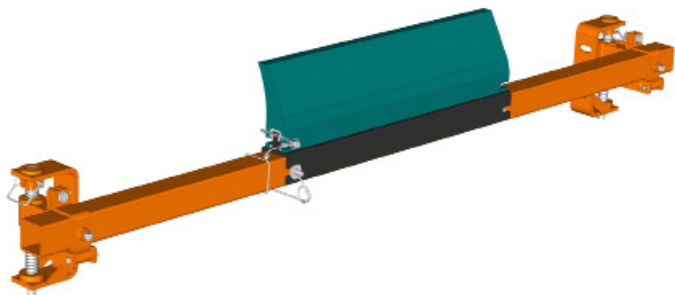

The **Martin® H2O Cleaner** is an innovative cleaning system incorporating a water spray with a urethane blade that removes carryback and water.


BENEFITS

- Soft urethane secondary blade squeegees the belt for effective removal of dirt and moisture from grooves and cuts in the belt cover.
- Optional spray nozzle improves cleaning efficiency with the application of water to the belt and may be used in dust suppression.

DIMENSIONS -- in. (mm)

Part No.	A in. (mm)		B in. (mm)		Spray Bar Nozzle Qty.
H2O4000S-18XX	16	(406)	72	(1829)	2
H2O4000S-24XX	22	(559)	72	(1829)	3
H2O4000S-30XX	28	(711)	84	(2134)	3
H2O4000S-36XX	34	(864)	84	(2134)	4
H2O4000S-42XX	40	(1016)	96	(2438)	5
H2O4000S-48XX	46	(1168)	96	(2438)	6
H2O4000S-54XX	52	(1321)	108	(2743)	6
H2O4000S-60XX	58	(1473)	108	(2743)	7
H2O4000S-66XX	64	(1626)	120	(3048)	8
H2O4000S-72XX	70	(1778)	120	(3048)	9
H2O4000S-84XX	82	(2083)	132	(3353)	11

NOMENCLATURE


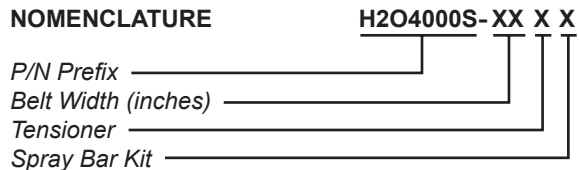


TENSIONER

- T: With Tensioner
- Ø: Without Tensioner

SPRAY BAR KIT

- W: With Spray Bar Kit
- Ø: Without Spray Bar Kit

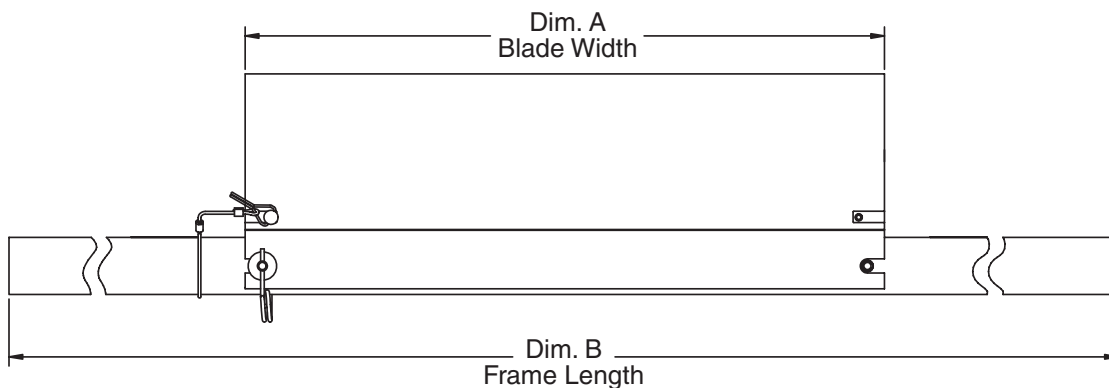

TECHNICAL DATA SHEET

SPECIFICATIONS: WATER CONSUMPTION

(approximate) gallons per minute (L/min)

Belt Width in. (mm)		Nozzles Used	5 psi (.34 bar)	10 psi (.69 bar)	15 psi (1.03 bar)	20 psi (1.38 bar)	30 psi (2.07 bar)	40 psi (2.76 bar)	60 psi (4.14 bar)
18	(400-500)	2	1.4 (5)	2.0 (8)	2.4 (9)	2.8 (11)	3.4 (13)	4.0 (15)	5.0 (19)
24	(500-650)	3	2.2 (8)	3.0 (11)	3.6 (14)	4.2 (16)	5.1 (19)	6.0 (23)	7.5 (28)
30	(650-800)	3	2.2 (8)	3.0 (11)	3.6 (14)	4.2 (16)	5.1 (19)	6.0 (23)	7.5 (28)
36	(800-1000)	4	2.9 (11)	4.0 (15)	4.8 (18)	5.6 (21)	6.8 (26)	8.0 (30)	10.0 (38)
42	(1000-1200)	5	3.6 (14)	5.0 (19)	6.0 (23)	7.0 (26)	8.5 (32)	10.0 (38)	12.5 (47)
48	(1200-1400)	6	4.3 (16)	6.0 (23)	7.2 (27)	8.4 (32)	10.2 (39)	12.0 (45)	15.0 (57)
54	(1400-1600)	6	4.3 (16)	6.0 (23)	7.2 (27)	8.4 (32)	10.2 (39)	12.0 (45)	15.0 (57)
60	(1600-1800)	7	5.0 (19)	7.0 (26)	8.4 (32)	9.8 (37)	11.9 (45)	14.0 (53)	17.5 (66)
66	(1800-2000)	8	5.7 (22)	8.0 (30)	9.6 (36)	11.2 (42)	13.6 (51)	16.0 (61)	20.0 (76)
72	(2000-2200)	9	6.5 (24)	9.0 (34)	10.8 (41)	12.6 (48)	15.3 (58)	18.0 (68)	22.5 (85)
84	(2200-2400)	11	8.0 (30)	11.0 (42)	13.2 (50)	15.4 (58)	18.7 (71)	22.0 (83)	27.5 (104)

Consumption is approximate and intended for reference only. Recommended water pressure is 10 psi (.69 bar).



Martin Engineering USA
 102 Christensen Road South
 Stapylton QLD 4207 - Australia
 +61 1300 627 364
 salesau@martin-eng.com | www.martin-eng.com.au

**COMPANY WITH
 QUALITY SYSTEM
 CERTIFIED BY DNV
 = ISO 9001:2008 =**

Problem Solved™ GUARANTEED!

Form No. L3831-06/12
 © Martin Engineering Company 2011, 2012