



# Martin® Roller Tracker™

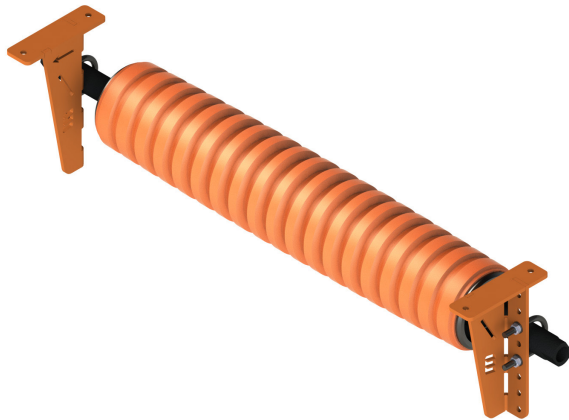

### BENEFITS

- Ease of installation and low maintenance.
- A vibration free rolling action.
- A design that meets customer needs.
- Superior bearings used for superior quality.
- No contact with edge of the belt.
- Polyurethane lagging improves durability.

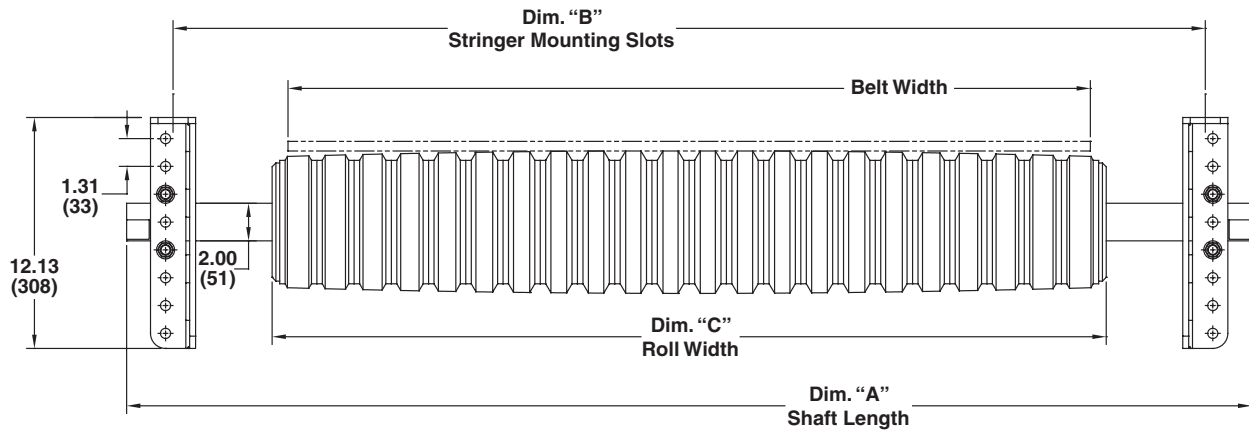

### DIMENSIONS

Assembly P/N	Belt Width in. (mm)	Dim. "A"	Dim. "B"	Dim. "C"
CTRS20	20 (500)	36.97 (939)	29 (736)	21.46 (545)
CTRS24	24 (600)	40.87 (1038)	33 (838)	25.35 (644)
CTRS30	30 (750)	46.85 (1190)	39 (990)	31.18 (792)
CTRS36	36 (900)	52.91 (1344)	45 (1144)	37.05 (941)
CTRS42	42 (1050)	58.90 (1496)	51 (1296)	42.87 (1089)
CTRS48	48 (1200)	64.88 (1648)	57 (1448)	48.74 (1238)
CTRS54	54 (1350)	70.87 (1800)	63 (1600)	56.54 (1436)
CTRS60	60 (1500)	76.85 (1952)	69 (1752)	62.36 (1584)
CTRS72	72 (1650)	88.86 (2257)	81 (2057)	74.06 (1881)



Martin Engineering Australia Pty Ltd.  
 20 Ern Harley Dr - Burleigh Heads, QLD, 4220 - Australia  
 1300 627 364  
[www.martin-eng.com.au](http://www.martin-eng.com.au)

