

# CleanScrape® Secondary Cleaner




The **CleanScrape® Secondary Cleaner** is an all stainless steel assembly featuring independent 6 inch wide blades with carbide tips. Each blade tip is supported on spring loaded arms at both ends. The load springs allow independent blade rotation back and forward as well as up and down. This “range-of-motion” provides equal load pressure across each blade, absorbs obstructions, conforms to ever-changing belt undulations, and is able to arc safely in the event of reversing belt direction or belt roll back.

### FEATURES & BENEFITS

- Optimum cleaning results
- “Free Flow” design allows for material to pass through arms
- Crowned Mainframe design compensates for belt wear in the center
- Low Blade-to-Belt pressure
- Simple installation inside or outside of chute
- Removed material returns to main flow
- Requires less tensioning over lifespan
- Handles reversing belts and belt rollback without damage to belt
- Easy cartridge removal
- Easy adjustment of cleaning pressure

### NOMENCLATURE

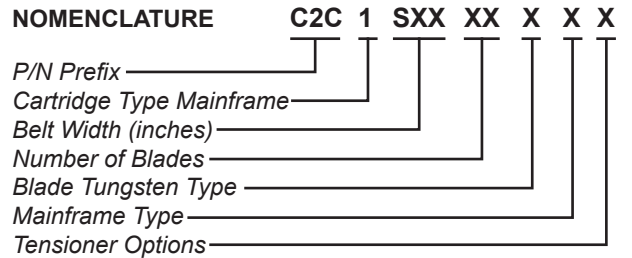

### BLADE TUNGSTEN

**TYPE 1:** Tungsten Carbide

### MAINFRAME TYPE

**S:** Stainless Steel  
**E:** Extended Length

### TENSIONER OPTIONS

**Blank:** No Tensioner  
**S:** Stainless Steel

### DOOR OPTIONS

**Blank:** No Door  
**D:** Mild Steel  
**S:** Stainless Steel

### SPECIFICATIONS

| Cleaner Type | Belt Width<br>in. (mm) | Maximum Belt Speed<br>fpm (m/sec) |                   |
|--------------|------------------------|-----------------------------------|-------------------|
|              |                        | Vulcanized Splice                 | Mechanical Splice |
| C2C1SXXXXXXX | 18–96 (457–2438)       | 900 (5)                           | 600 (3)           |



**Martin Engineering USA**  
 One Martin Place  
 Neponset, IL 61345-9766 USA  
 800 544 2947 or 309 852 2384  
 Fax 800 814 1553  
 www.martin-eng.com

**COMPANY WITH  
 QUALITY SYSTEM  
 CERTIFIED BY DNV  
 = ISO 9001:2008 =**