

www.globalcement.com

Contents

Subscribe

Ad Index

MAY 2023

global
cement[™]
MAGAZINE



Lubrication reduces friction. Knowledge reduces costs.

Moving ahead together.

Increase your energy efficiency with our know-how and the right high-performance lubricant.

www.klueber.com/cement



KLÜBER
LUBRICATION




Martin Engineering

CONVEYOR BELT CLEANER TENSIONERS

Martin Engineering looks at what cement plant operators should consider when specifying conveyor belt cleaners, and the tensioners that keep them in check...

There are many issues to consider when specifying the most appropriate conveyor belt cleaner. An important consideration is how to maintain proper tension for optimum cleaning performance without introducing related problems. Inadequate tensioning causes carryback to cling to the belt and spill along its path, piling up under the conveyor and emitting excessive dust. This requires extra labour for clean-up and can affect air quality. Over-tensioning leads to friction damage to the carrying side of the belt, premature blade wear and potential splice damage. Both scenarios contribute to unsafe work conditions and raise the cost of operation.

There are two basic approaches to applying tension to the belt cleaner: linear and rotary. The blade's cleaning position and angle of approach to the belt often dictate whether a linear or rotary tensioner is used. Based in the US, the Conveyor Equipment Manufacturers Association (CEMA) defines the cleaning positions as primary, secondary or tertiary. Primary cleaners typically function with a 'peeling' action, while secondary and tertiary cleaners are usually scrapers. Belt cleaners mounted in the primary position generally use a rotary style tensioner, while most units mounted in the secondary or tertiary positions use linear style tensioners. In most cases, belt tensioners have to be monitored and adjusted manually so they can maintain optimum pressure and carryback removal. Estimating when blades need changing is often a guessing game that, if left too long, could lead to unnecessary complications.

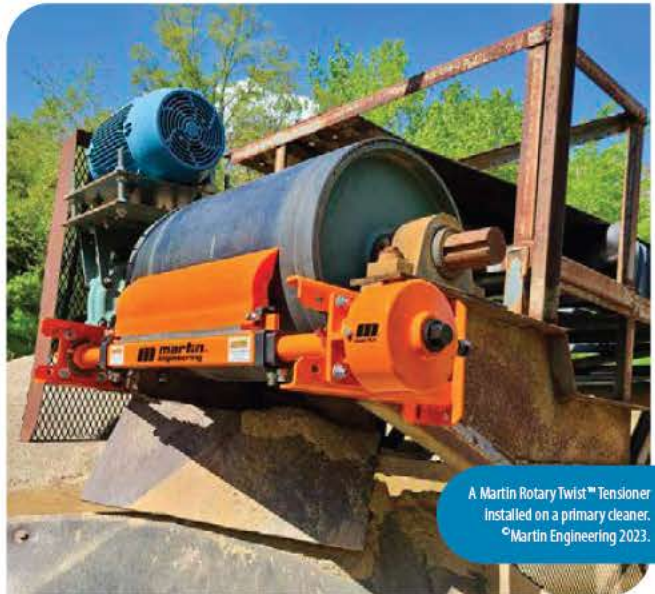

A Martin Rotary Twist™ Tensioner installed on a primary cleaner. © Martin Engineering 2023.

Linear tensioners

Linear tensioners are most often applied where the compensation for wear is required in small increments, such as with hard metal-tipped cleaners located in the secondary cleaning position or with brush cleaners.

The simple design of linear tensioners often allows just one setting for full blade wear. Further, these tensioners can accommodate actuator deflection for accurate adjustment of cleaning pressure, delivering the ability to accommodate uneven mounting positions or asymmetrical blade wear.

Rotary tensioners

The required tensioning forces can be applied by springs, hydraulic or pneumatic cylinders, electric actuators or from torque stored in an elastomeric element. Rotary tensioners like the Martin® Twist™ Tensioner are often used with urethane blades,

where the change in blade height and thickness as it wears is significant. Rotary designs tend to be compact and, in most cases, the actuator(s) can be mounted at any orientation, which provides options to install the belt cleaner in the optimum position.

Air tensioners

Air tensioners use the resilience of a pneumatic cylinder to cushion impact. The tensioners can use Martin's Air Connection Kit to plug them directly into an existing air system, allowing for a more streamlined installation process.

Spring tensioners

Spring tensioners maintain efficient belt cleaning with a rugged coil spring. The Martin XHD Spring Tensioners deliver effective cleaning while cushioning splice shock to prevent damage, well suited for tensioning heavy duty belt cleaners while standing up to tough conditions. Dual tensioning is recommended for belt cleaners installed on belts wider than 1200mm. However, dual tensioning does not change the fact that regular adjustment is required to maintain suitable cleaning pressure on the belt, which is where Martin's N2[®] Smart Technology comes into play.

Auto Tensioner/Position Indicator

Martin Engineering's smart technology platform includes the company's patented N2[®] Position Indicator to monitor primary cleaner blade wear and inform operators when the blade needs changing. The system uses a cellular gateway that relays data to the cloud and then to the user, delivering actionable information in real time.



A Martin linear tensioner installed on a secondary cleaner. ©Martin Engineering 2023.

The N2 PI and Smart Device Manager App ease the burden on managers and workers so they can focus their attention on other critical details of the operation. Precise tensioning and improved belt cleaning reduce the volume of dust and spillage from carryback, improving workplace conditions and decreasing the labour needed to maintain and clean around the discharge zone.

Concluding remarks

While manufacturers continue to improve belt cleaner effectiveness, it has become clear that there is no single or ideal solution for belt cleaning and tensioner selection. Safety of personnel and the belt itself is the primary consideration when selecting a tensioner. Ease of inspection and maintenance is critical for belt cleaner effectiveness, so the tensioner must allow quick and safe service. Martin Engineering offers the services and tensioning products that are necessary to meet the multifaceted demands of belt cleaning. 🌐



An N2[®] Twist[™] Tensioner. ©Martin Engineering 2023.



An N2[®] Position Indicator on a spring tensioner. ©Martin Engineering 2023.