

# MINING & QUARRY WORLD




Epiroc presents  
**Office  
TeleREMOTE**

## News, Plant and Equipment

**Features**

- 8 Customised in every detail
- 10 Wirtgen 220 SMi 3.8 Surface Miner – high-performance chalk mining in France
- 12 Preventing accumulation in mining hoppers and chutes
- 16 Rock Bolting from Past to Present
- 24 Epiroc Office TeleREMOTE Pushing the boundaries, in more ways than one
- 28 Reclaiming tailings sustainably with a Weir Mobile Pumphouse
- 32 Comminution of critical metal ores
- 40 Hardfacing products for mines, quarries and mineral processing facilities
- 44 Conveying advice
- 46 Technology options and innovation for copper heap leaching

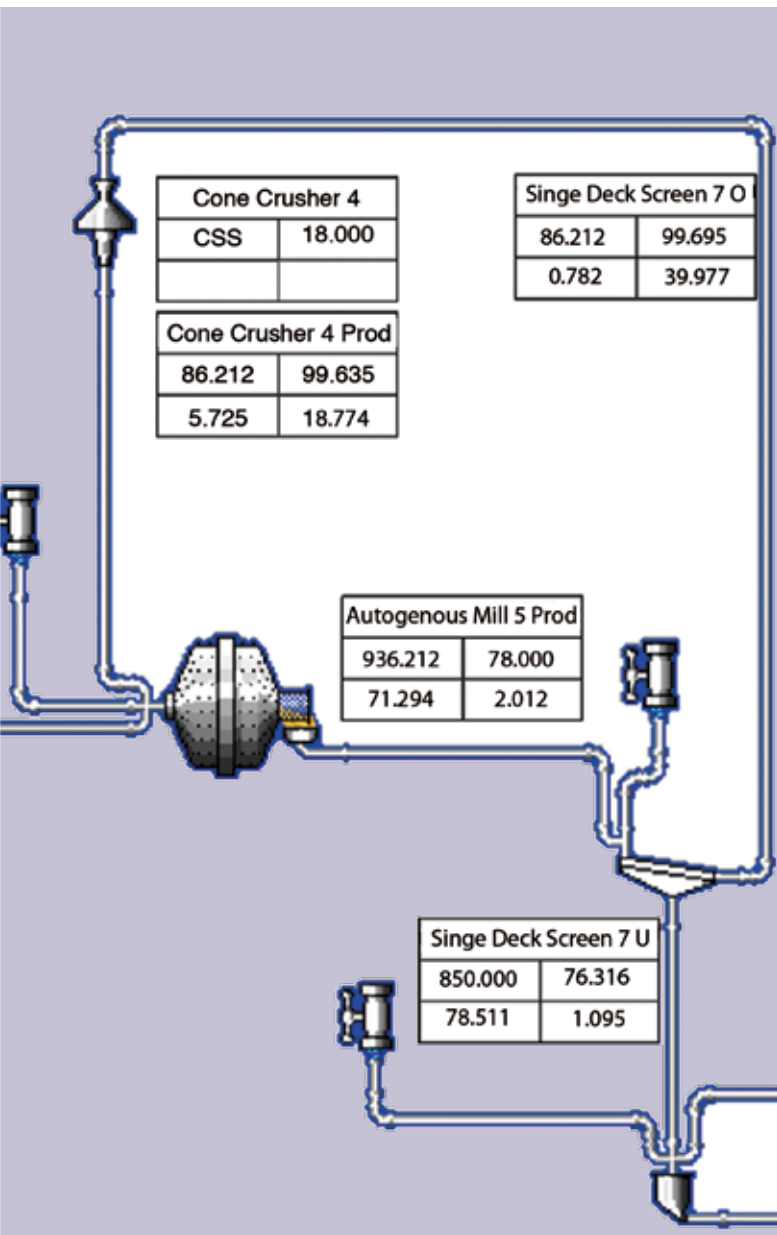**MINING & QUARRY WORLD****Epiroc**

We are a leading global productivity partner for the mining and infrastructure industries. With cutting-edge technology, Epiroc develops and produces innovative, safe and sustainable drill rigs, rock excavation and construction equipment and tools. The company also provides world-class service and solutions for automation and interoperability.

**Managing Director and Publisher:**

Trevor Barratt

**International Sales:**

Gordon Barratt +44 1909 485105 gordon.barratt@tradelinkpub.com  
 Gunter Schneider +49 2131 511801 info@gsm-international.eu

**Graphic Designer:**

Sarah Beale sarah.beale@tradelinkpub.com

**Published by: Tradelink Publications Ltd.**

16 Boscombe Road, Gateford Worksop, Nottinghamshire S81 7SB

Tel: +44 (0) 1777 871007

+44 (0) 1909 485105

E-mail: admin@mqworld.com

Web: www.mqworld.com

All subscriptions payable in advance.

Published 6 times per year, post free:

UK: £60.00 Worldwide: £70.00 | ISSN No: 2045-2578 | D-U-N-S No:

23-825-4721 Copyright© Tradelink Publications Ltd. All rights reserved.



# Preventing accumulation in mining hoppers and chutes

Air cannons can help prevent accumulation, while minimizing the need for downtime and manual labor.

**E**fficient material flow is a critical element of wet mining processes such as stoping, hydraulic mining and wet dredging. Accumulation or blockages in storage systems and build-up in process vessels can impede material movement, causing bottlenecks that interfere with equipment performance, reduce process efficiency and put a choke hold on an operation's profitability. Poor material flow also raises maintenance expenses, diverting manpower from core activities and in some cases introducing safety risks for personnel.

"Most systems suffer from some amount of accumulation on vessel walls, which can rob plant owners of the storage systems in which they've invested," observed Brad Pronschinske, Global Director of Air Cannons Business Group for Martin Engineering. "These buildups reduce material flow, decreasing the 'live' capacity of the vessel and the efficiency of the bulk handling system overall." Pronschinske said the accumulations tend to take one of several forms: arches, plugs, build-ups or "rat holes."


"If they become severe enough, flow problems can bring production to a complete stop," Pronschinske continued. Although many plants still use manual techniques to remove build-up, the cost of labor and periodic shutdowns has led some producers to investigate

more effective methods for dealing with this common production issue.

## BUILD-UP VS. THROUGHPUT

Even well-designed processes can experience accumulations, which have a significant impact on output and profitability. Changes in process conditions, raw materials or weather can all have an effect on material flow, and even small amounts of accumulation can grow into a serious blockage.

Beyond moisture content, there are many causes of raw material buildup on vessel walls. Some metals contain naturally occurring magnetic properties. Nearly 90% of the earth's crust contains silica, and the sharp crystalline structure can contribute to buildup. Other factors can include the surface friction of the silo walls, the shape

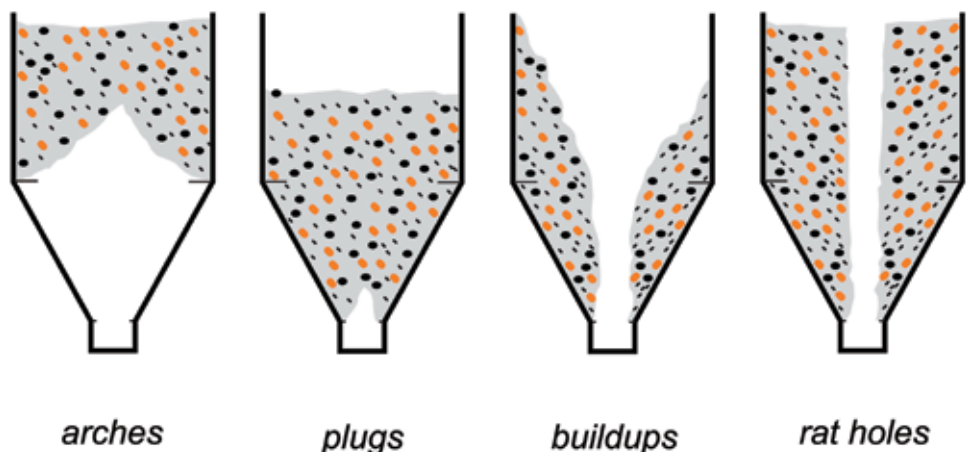



of the vessel, the angle of the slope and the size of the material being loaded.

Lost production is probably the most conspicuous cost of these flow problems, but the expense can become apparent in a variety of other ways. Shutdowns to clear the restricted flow cost valuable process time and maintenance hours, while wasting energy during re-start. Refractory walls can be worn or damaged by tools or cleaning techniques. When access is difficult, removing material blockages may also introduce safety risks for personnel. Scaffolds or ladders might be needed to reach access points, and staff can risk exposure to hot debris, dust or gases when chunks of material are released.

Many of the most common problem areas for accumulation are classified as confined spaces, requiring a special permit for workers to enter and perform work. The consequences of untrained or inexperienced staff entering a silo or hopper can be disastrous, including physical injury, burial and asphyxiation. Disrupted material adhered to the sides of the vessel can suddenly break loose and fall on a worker. If the discharge door is in the open position, cargo can suddenly evacuate, causing

unsecured workers to get caught in the flow. Cleaning vessels containing combustible dust – without proper testing, ventilation and safety measures – could even result in a deadly explosion.

## GETTING PROFESSIONAL HELP

“While some large facilities choose to make the capital investment to purchase their own cleaning gear to clear process equipment and storage vessels – as well as train personnel – others are finding it more sensible to schedule regular cleanings by specially-trained contractors,” said Pronschinske. “Given the costs of labor, lost time and potential risk to employees, this can often be accomplished for less than the total investment of in-house cleanouts.”

At one location, for example, the blockage was so severe in one silo that it had been out of use literally for years. While it took the outside contractor almost two weeks to fully evacuate the vessel, the process restored 3500 tons of storage capacity. At another facility, the crew was able to remove enough “lost” product that the value of the recovered material actually paid for the cost of the cleaning. In short, regular cleaning of storage vessels can quickly turn into an economic benefit – not an expense, but rather an investment with a measurable ROI.

## THE COSTS OF CLEANING

There are a few types of equipment used for this purpose. One operates like an industrial-strength “weed whip,” rotating a set of flails against the material in the vessel. This approach eliminates the need for confined space entry and hazardous cleaning techniques, typically allowing the material to be recaptured and returned to the process stream.

The whip can be set up quickly outside the vessel, and it’s portable enough to move easily around various bin sizes and shapes. Typically lowered into the vessel from the top and then working from the bottom up to safely dislodge accumulation, the pneumatic cutting head delivers powerful cleaning action to remove buildup from walls and chutes without damaging the refractory. Technicians lower the device all the way down through the topside opening,




Safe, effective cleaning requires tools that work inside the silo from the top, controlled by personnel outside.

then start at the bottom of the buildup and work their way up, undercutting the wall accumulation as it falls by its own weight. In extreme cases, a “bin drill” can be used to clear a 12-inch (30.5 cm) pathway as deep as 150 feet (45 meters) to start the process.

## FLOW AIDS

Regular cleaning is one approach to keeping materials flowing freely by removing buildups from silo walls, but there are other flow aids which may reduce the need for cleaning or even eliminate it. One method is through industrial vibrators designed for bin and chute applications.

Electric vibrators are generally the most efficient, delivering the longest life, low maintenance and low noise. The initial

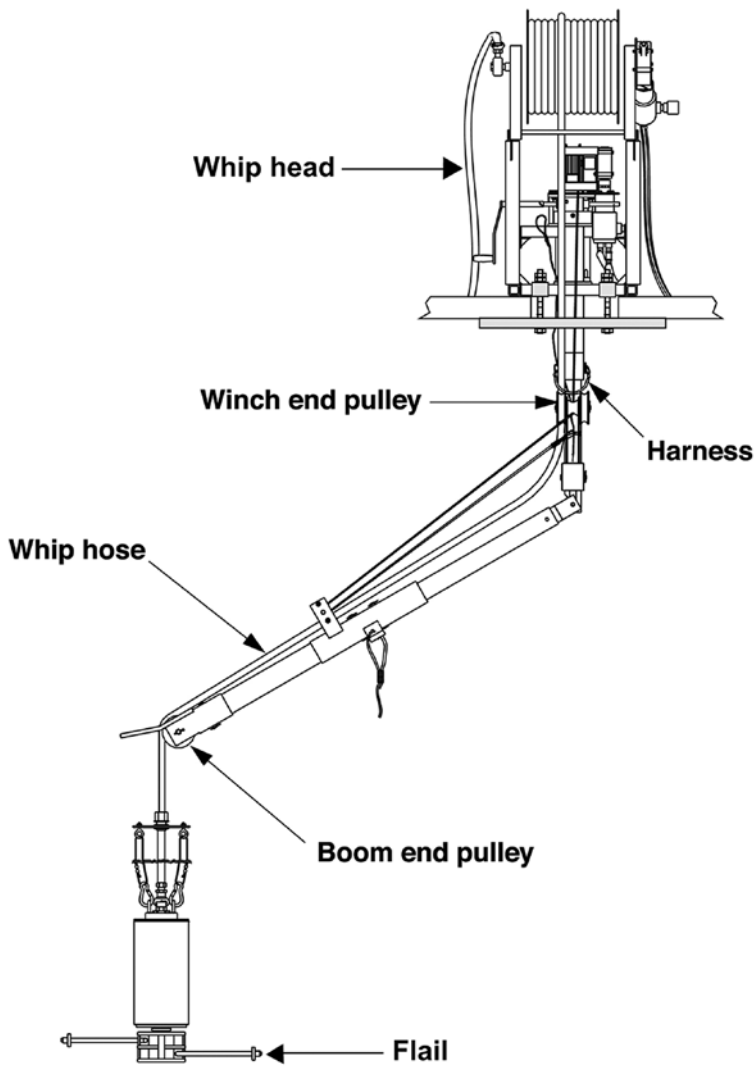

A pneumatic whip rotates a set of flails to dislodge material, eliminating the need for confined space entry.

cost for an electric vibrator is higher than for pneumatic designs, but the operating cost is lower. Turbine vibrators are the most efficient and quietest of the pneumatic designs, making them well suited to applications in which low noise, high efficiency and low initial cost are desired.

Air cannons are another approach to maintaining good material flow, particularly in larger vessels. Also known as an air blaster, the air cannon is a flow aid device that can be found in mining, coal handling and many other industries. Applications vary widely, from emptying bulk material storage vessels to purging boiler ash to cleaning high-temperature gas ducts.

In the mining industry, air cannons are frequently specified to eliminate build-ups in hoppers, storage vessels, transfer chutes, bins and other production bottlenecks. They can also be found in mineral processing plants where metals are extracted using processes creating slurries and other wet, tacky tailings.

Air cannon technology has been used in mining and material processing for many years, helping to improve flow and reduce maintenance. The timed discharge of a directed air blast can prevent accumulation or blockages that reduce process efficiency and raise maintenance expenses. In underground mines with potentially explosive dust, manual firing of cannons without the use of electrical solenoids is an option. By facilitating flow and minimizing build-up, air cannons help bulk material handlers minimize the need for process interruptions and manual labor.

The two basic components of an air cannon are a fast-acting, high-flow valve and a pressure vessel (tank). The device performs work when compressed air (or some other inert gas) in the tank is suddenly released by the valve and directed through a nozzle, which is strategically positioned in the tower, duct, chute or other location. Often installed in a series and precisely sequenced for maximum effect, the network can be timed to best suit individual process conditions or material characteristics.

“The core message for mines and material processors is that they don’t have to put up with accumulation problems and the additional expenses they can cause,” Pronschinske concluded. “There are a number of approaches that can help resolve those issues before they turn into expensive downtime, lost material and safety hazards.”

Copyright © 2020 Martin Engineering Company.



Industrial vibrators for bin & chute applications can reduce or even eliminate the need for cleaning.