

THE MINING REVIEW JOURNAL ZAMBIA

A WIDELY ACCEPTED JOURNAL WITH UNIQUE READERSHIP & REAL INFLUENCE IN THE MARKET PLACE



www.miningreviewjournal.com

May - June 2023



**BEUMER Group:
FAM Group brings a wealth
of new expertise:
Successful through tradition**



9 772313 654003 7 0116

Modular Transfer Point Kit For Belt Conveyors Offers Faster Installation and More Options



An efficient Transfer Point starts with a Modular Enclosure but also has excellent belt support and sealing accessories.

The global leader in conveyor accessories has reimagined the bulk handling transfer chute to reduce downtime for installation and offer more options for future modifications. The Martin® Transfer Point Kit from Martin Engineering includes modular horizontal loading zone, settling zone, and stilling zone configurations, providing easier installation and a wider variety of chute options while facilitating future upgrades. The kit simplifies the installation process, reducing the amount of labor required for assembly and allowing the system to be pre-built prior to installation for reduced system downtime. The result is faster installation with less labor and shorter shutdowns, increasing the return on investment (ROI).

"This is a rugged one-kit solution designed to fit most standard conveyors and belt widths, re-

gardless of what material is being transferred," said Dave Mueller, Conveyor Products Manager at Martin Engineering. "Our Center for Innovation (CFI) is constantly looking for ways to engineer equipment with safety and our customer's bottom line in mind. That's why the kit doesn't just streamline labor, time and production, but it's also a logistical solution by shipping it in one crate."


The Martin® Transfer Point Kit is a heavy-duty horizontal enclosure for the loading zone. Each kit is either ordered as a loading zone, settling zone, or stilling zone. The width and length of the kit are determined by the receiving belt's width and speed and the dust characteristics of the material being transferred. Dustier applications may require a longer settling zone.

This innovation solves three

common problems. The first is that transfer chutes are normally shipped in different packages that sometimes don't arrive at the same time. Upon delivery, inventory is stored until scheduled downtime, increasing the chance of loss or misplacement. Another problem is, for most new transfer chutes on the market, some components can be prepared and assembled beforehand, but generally, new chutes need to be completely fabricated during downtime. The inability to build the structure before a shutdown increases the project budget and contributes to lost production time. The third problem is, after construction, horizontal transfer point chutes are commonly a single system that requires significant engineering and construction to be modified. Changes to existing transfer points can be challenging, but to accommodate new belt support equipment or adapt to increases in production, the chute is often raised or lengthened.

To address these problems, the chute sections are 1) delivered in a single crate with every component for assembly included, 2) able to be assembled prior to the shutdown and installation, saving time and money, and 3) fully modular, making future changes easy without expensive construction projects.

The transfer point system accommodates belt widths of 18-72 in. (450-1800 mm) and an internal chute width of 9-59 in. (228-1498 mm). Each modular section is either 4 feet (1.21 meters) or 6 ft. (1.82 m) long and constructed of mild steel, 304 stainless steel or 316 stainless steel, with a thickness of 0.25 in. (6.35 mm), 0.5 in. (12.7 mm), or 0.75 (19.05 mm) to accommodate a wide vari-

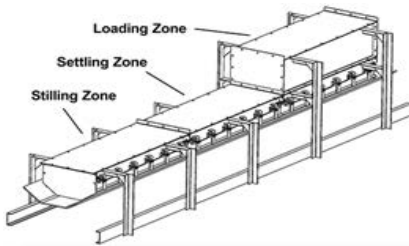

ety of materials and conditions.

The taller loading zone controls air turbulence and connects to both the drop chute and settling zone. When cargo hits a belt with great velocity, fines and lumps splash up the sides of the belt. Without a properly sealed enclosure, the material will spill underneath the conveyor, creating a hazard, restricting access and fouling other components. The settling zone follows the loading zone and helps mitigate dust emissions. Dust is collected, mechanically filtered or settled back into the cargo stream prior to leaving the stilling zone and continuing as a conventional open air conveyor.

Listed under a single part number, the kit includes a chutewall weldment, wearliner assembly, wearliner plate, outer chute supports, top cover, tail panel/clamp/rubber sheet, installation hardware and an owner's manual. The skirt seal is sold separately, since it is a single piece that runs the entire length of the chute and skirting is the most frequently replaced wear



part in most transfer points.

The Martin® Transfer Point Kit installation is covered under the Absolutely No Excuses Guarantee as long as a Martin Engineering technician is involved in the installation process. Although assembly instructions are clear and easy to follow, another benefit of involving a factory-trained Martin expert is that customers who have ordered the kit have experienced a significant reduction in assembly and installation time. Moreover, once the system is started up and tested, there is a knowledgeable person on-hand to offer advice on adjustments to ensure optimum performance.

"After installation, Martin Territory Managers or partner distributors are available to offer support," Mueller added. "The feedback for the kit has been excellent. Customers get the heavy-duty Martin quality they've come to expect in a more convenient, efficient and sustainable package."

FOR MORE INFORMATION
For product information, contact:

Martin Engineering
One Martin Place

Neponset, IL 61345
Tel: (309) 852-2384
Toll-free: (800) 544-2947
Fax: (800) 814-1553

Email: info@martin-eng.com
Web site: www.martin-eng.com



US and corresponding foreign patents issued and pending.

® Registered trademark of Martin Engineering Company in the US and other select locations.

© 2023 Martin Engineering Company. All rights reserved.

Additional information can be obtained at www.martin-eng.com/trademarks.

<https://www.facebook.com/MartinEngineering>
<http://www.linkedin.com/company/martin-engineering>
<https://twitter.com/MARTINupdates>
<https://www.youtube.com/@martinengineering>