

MAY 2019


ROCKROADRECYCLE.COM



**RIVERBEND
CONSTRUCTION SERVICES
BOOSTS PRODUCTIVITY**



**2019 HARD HAT EXPO
EXCEEDS EXPECTATIONS**

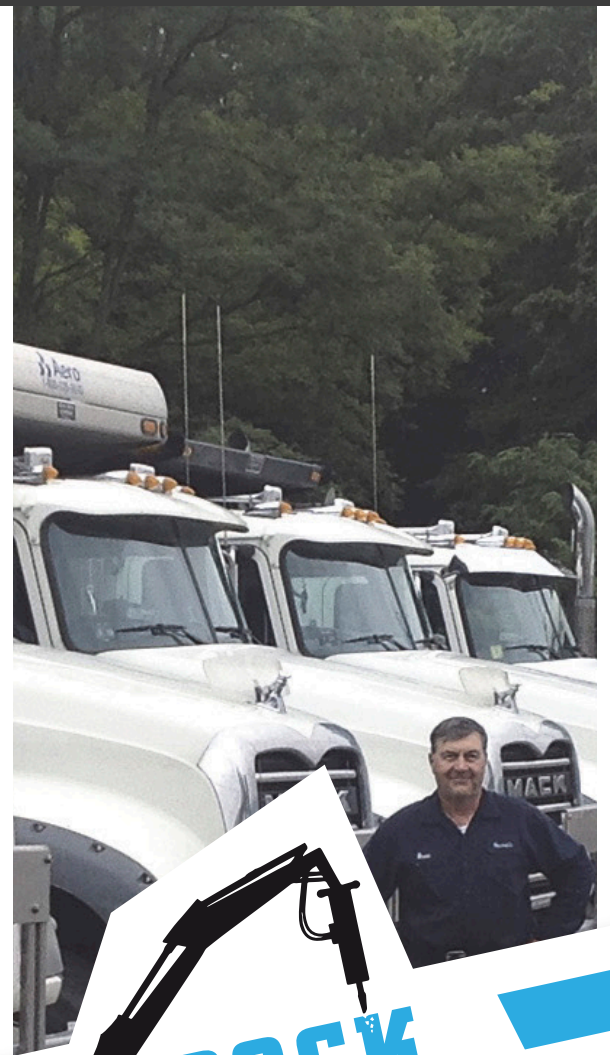

**TRUCKING COMPANY
SHAKES OFF LOW-QUALITY
TRUCK VIBRATORS**





ROCK

Riverbend Construction Services boosts productivity and saves fuel	3
Conveyor transfer point design: Material containment for safety & efficiency	8
Prairie Dawg Practical by Tim Holmberg DEMI Equipment	10
Kleemann plants receive award for well thought-out design	12
U.S. DOL announces grant availability	14
Classifieds	18

ROAD

2019 Hard Hat Expo exceeds expectations by Colleen Suo	3
Getting to the bottom line with Dannible & McKee, LLP by Kaitlyn A Hensler	7
Your heavy hauling checklist	18
New CAT® safety VR module creates an immersive safety experience for employees	25
Classifieds	28
Millimeter GPS raises the bar for concrete paving by Jeff Winke	34

RECYCLE

Trucking company shakes off low-quality vibrators	3
Missouri composter blankets dust with atomized misting equipment	5
On the front lines with Fisher Phillips	6
The evolution of WM Biers by Keith Loria	8
What employers need to know about opioid and marijuana testing by Courtney Llewellyn	12
Classifieds	20



- Power transmission components
- Idlers



Riverbend Construction Services boosts productivity and saves fuel

by RockRoadRecycle staff writer

On the cover:
Riverbend's Boyd Duff on location

Photos courtesy of Riverbend Construction Services

PG 3

Frederick W. Lee
Publisher, President

Bruce Button VP, General Manager
bbutton@leepub.com

Jessica Mackay Production Coordinator
ext. 137 jmackay@leepub.com

Colleen Suo Editor
ext. 145 csuo@leepub.com

Gabbie Albrecht Social Media Coordinator
ext. 163 galbrecht@leepub.com

Ad Sales: 1-800-218-5586

Matt Stanley Sales Manager
ext. 124 mstanley@leepub.com

Peggy Patrel Classified Ad Manager
ext. 111 classified@leepub.com

Tina Krieger
ext. 108 tkrieger@leepub.com

Scott Duffy
802-484-7240 srduffy@together.net

Andy Haman
ext. 160 ahaman@leepub.com

Jessica Waite
ext. 116 jwaite@leepub.com

Christopher Nyce
267-261-4235 cnyce@leepub.com

Christine Attle
315-317-0905 christine.leepub@gmail.com

Patrick Burk
585-343-9721 burk.patrick1956@gmail.com

Free Subscriptions:
www.rockroadrecycle.com
rockroadrecycle.com/my-account/

Mention of product names in articles does not indicate an endorsement.
We do not guarantee claims stated by advertisers.
Permission is granted for reprinting of editorial content provided
RockRoadRecycle.com is given full credit.

Lee Newspapers, Inc.
PO Box 121 / 6113 St. Hwy. 5
Palatine Bridge, NY 13248
PH 518-673-3237

18

Classifieds

8

Conveyor transfer point design:
Material containment for safety & efficiency



10

Prairie Dawg Practical

by Tim Holmberg
DEMI Equipment



12

Kleemann plants receive award for well thought-out design



14

U.S. DOL announces grant availability



Associations and affiliations:





A well-designed transfer point controls the maximum load at the highest achievable volume.

Photos courtesy of Martin Engineering

Advice for cleaner, safer, more productive conveying

As tons of material per hour are quickly dropped with great force through receiving chutes onto a receiving conveyor, fugitive cargo often piles up around the frame and dust migrates throughout the area, collecting on idlers, pulleys and floors and affecting air quality. Workers have to continuously clean up the material before it encapsulates the belt, potentially exposing them to a hazardous work area around a moving conveyor — where even incidental contact can result in serious injury in a split second. Considering that most conveyor injuries occur through routine maintenance or clean up, controlling fugitive material is becoming one of the primary elements in a well-organized effort to reduce hazards and prevent injuries.

“Conveyor operators need only take a broad look at the expense that fugitive material has on a system to realize the full cost that accompanies inefficient transfer point designs,” said Jerad Heitzler, product specialist at Martin Engineer-

ing. “Problems such as improper belt support, badly sealed chutes, damaged idlers and uneven cargo distribution can all result in spillage and belt mistracking. They also contribute to increased costs for lost material, premature equipment failure, maintenance and cleanup — as well as the potential for injury and compliance issues. These factors raise the cost of operation and reduce profit margins.”

In a properly engineered transfer point, each component — from the chute design to the cradles and dust seals — is employed to maximize its specific function and contain dust and fines, while at the same time offering workers easy access for maintenance.

Transfer points

Containment is the key to avoiding spillage and dust and there are a number of components designed for this purpose. Although shaped transfer chutes and rock boxes direct the material flow to mitigate the concussion of material on the

belt, most high-volume operations need one or more impact cradles to absorb the force of the cargo stream. Heavy-duty impact cradles can be equipped with rubber or urethane impact bars with a top layer of slick UHMW plastic to minimize belt friction. Able to withstand impact forces as high as 17,000 lbf (53.4 to 75.6 kN) and drop heights of up to 50 feet (15.2 m), support beams in the center of the cradle are set slightly below the receiving belt’s line of travel. In this way, the belt avoids sustained friction when running empty and yet can absorb hard impacts during loading, while still retaining a tight belt seal.


Within the settling zone — located after the impact cradle in the conveyor chute box — slider cradles can then create a troughed belt to center the cargo and reduce disruption quickly, aiding in dust settlement. Slider cradles, located down the length of the skirted area, have several functions. One is to create a trough angle that adequately centers the load. The trough angle also plays an important part in retaining a tight seal between the belt and the skirt. Lastly, utilizing track mount idlers in between each cradle, a smooth belt path is created through the settling area — one that can be easily maintained. A smooth belt path should have no gaps, minimizing disruption and promoting containment, allowing dust and fines to settle into the cargo stream prior to leaving the containment area.

Airflow

With a constant stream of material crashing on the impact point of the receiving belt, the transfer point can be extremely turbulent — and this turbulence must be contained. By slowing the airflow in the skirted area, suspended dust is allowed to settle onto the cargo path. To contain the mixture of air and disrupted material, a stable and correctly supported belt is needed for the sealing components to function properly. Without a stable beltline, the belt will sag between idlers and sealing components will not prevent air and fine material from escaping out of the resulting gaps, causing spillage and dust emissions.

Chute sealing

By closing gaps and keeping a tight seal on the belt, apron seals can also be attached to the chute walls to prevent fugitive dust and fines from escaping. “A crucial requirement in any transfer point designed for reduced spillage and high efficiency is an effective skirting and wear liner sealing system at the edge of the belt,” explained Heitzler. “Modern designs feature external skirting, which

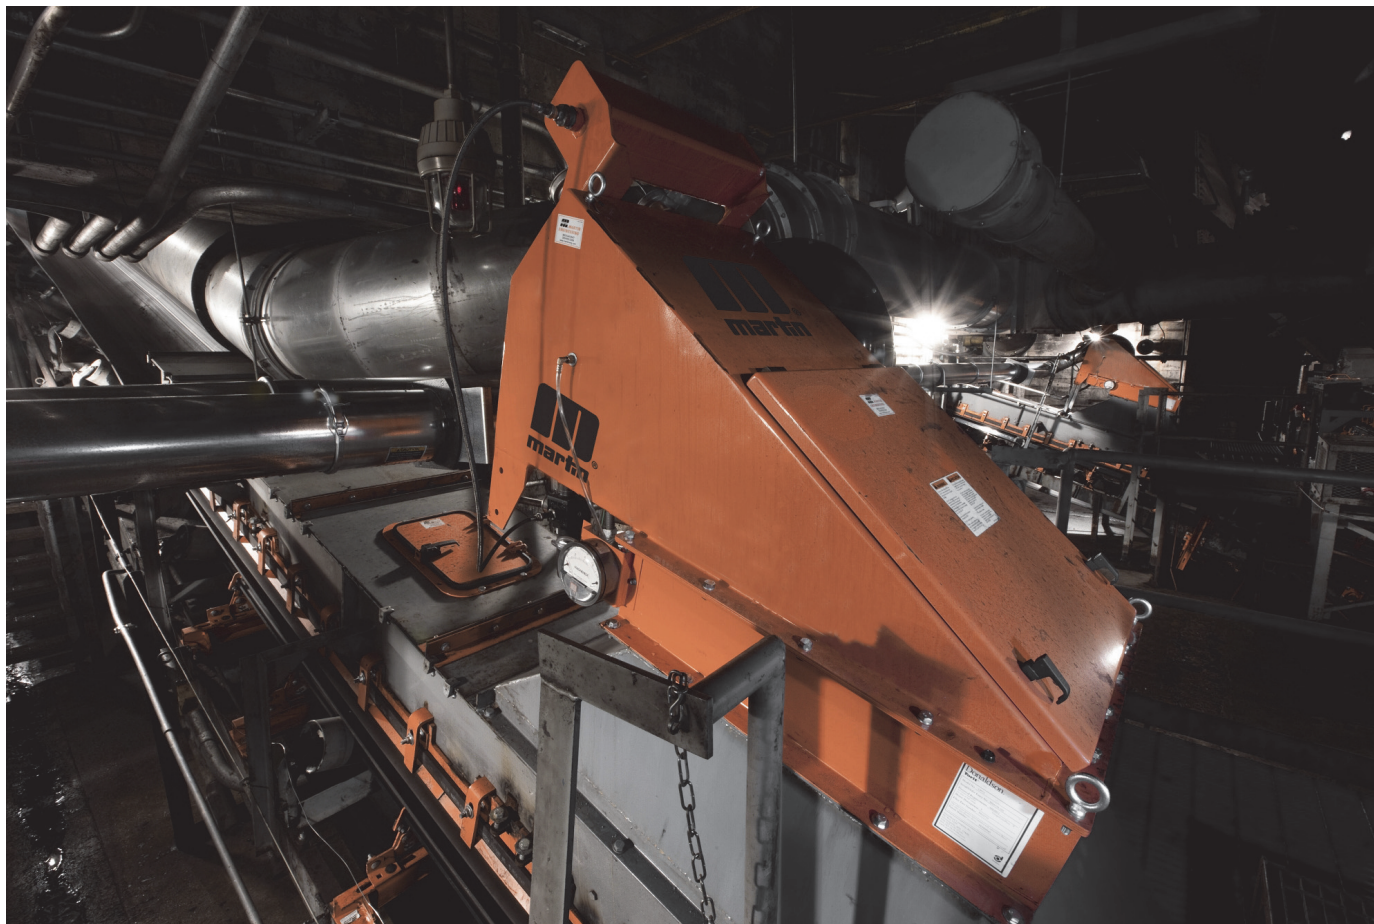

An integrated air cleaner is a small, independently-operating unit placed at the dust generation point.

CONVEYOR from 8

establish the tight belt seal needed to eliminate fugitive dust and fines.”

The external design requires minimal tools and no confined space entry in order to inspect, adjust or replace wear liners or skirts and in most cases can be performed by a single worker. The low profile of the skirting assembly needs only a few inches of clearance, allowing installation and maintenance in space-restricted areas. The design of these components drastically reduces scheduled downtime and the potential workplace hazards associated with replacement and adjustment.

Dust filtration

In operations with limited space for a settling zone or especially dusty materials, dust bags and curtains may be essential components. Providing passive relief via positive air pressure created at belt conveyor loading zones, dust bags prevent the escape of air-

borne particulates by venting the air and collecting dust at the exit of the loading zone and mounted in the skirtboard cover, dust curtains can help create a plenum for dust suppression and dust collection. For additional dust control, an integrated air cleaner system can be installed at the point of emission, containing a suction blower, filtering elements and a filter cleaning system.

Conclusion

Managers concerned with the overall safety and cost of operation need to review potential hazards, the impact of rising labor costs for cleanup and maintenance, combined with the expense of potential fines or forced downtime to determine specifically how they can affect the bottom line. Using the technologies described here, even poorly performing conveyors often don't need to be replaced or rebuilt, but merely modified and reconfigured by knowledgeable and experienced technicians installing modern equipment. ■



An effective transfer point requires the belt's line of travel to be stabilized and supported.



Cleaning up spillage exposes workers to a potential hazard area from the moving conveyor.