



Martin® Roller Tracker™

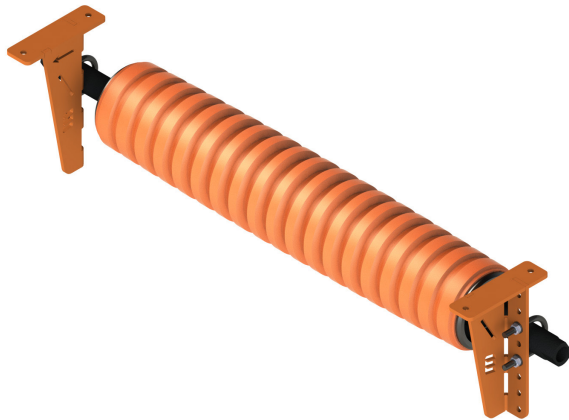

BENEFITS

- Ease of installation and low maintenance.
- A vibration free rolling action.
- A design that meets customer needs.
- Superior bearings used for superior quality.
- No contact with edge of the belt.
- Polyurethane lagging improves durability.

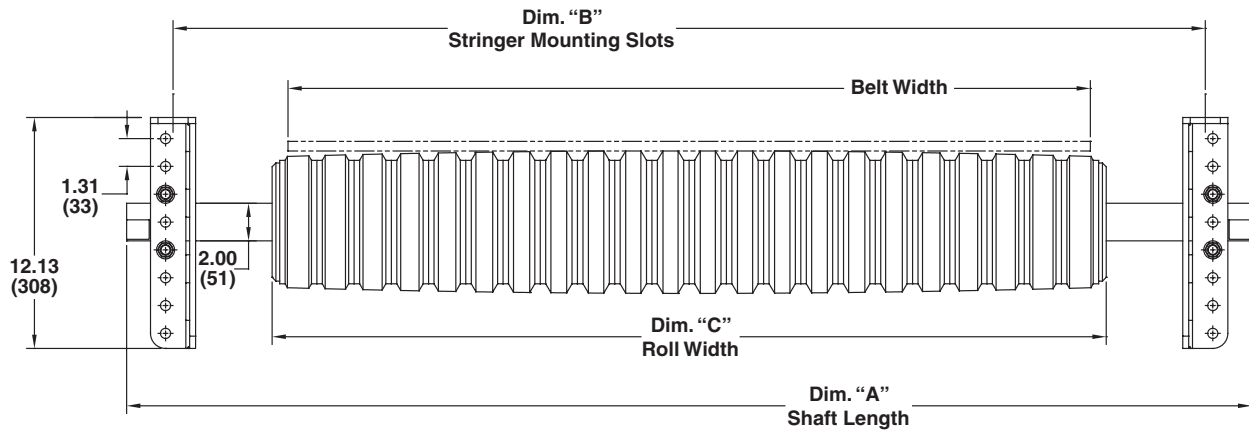

DIMENSIONS

Assembly P/N	Belt Width in. (mm)	Dim. "A"	Dim. "B"	Dim. "C"
CTRS20	20 (500)	36.97 (939)	29 (736)	21.46 (545)
CTRS24	24 (600)	40.87 (1038)	33 (838)	25.35 (644)
CTRS30	30 (750)	46.85 (1190)	39 (990)	31.18 (792)
CTRS36	36 (900)	52.91 (1344)	45 (1144)	37.05 (941)
CTRS42	42 (1050)	58.90 (1496)	51 (1296)	42.87 (1089)
CTRS48	48 (1200)	64.88 (1648)	57 (1448)	48.74 (1238)
CTRS54	54 (1350)	70.87 (1800)	63 (1600)	56.54 (1436)
CTRS60	60 (1500)	76.85 (1952)	69 (1752)	62.36 (1584)
CTRS72	72 (1650)	88.86 (2257)	81 (2057)	74.06 (1881)



Martin Engineering USA
 One Martin Place
 Neponset, IL 61345-9766 USA
 800 544 2947 or 309 852 2384
 Fax 800 814 1553
 www.martin-eng.com

**COMPANY WITH
 QUALITY SYSTEM
 CERTIFIED BY DNV
 = ISO 9001:2008 =**