


# Martin® VPlow Modular

The **Martin® VPlow Modular** is an economical solution for tail protection in medium- to heavy-duty applications. Can be used on belts with belt speeds up to 900 fpm (4.6 m/sec).

Easily replaceable blade provides 2 in. (50 mm) of wear life. Blade is available in 60 Shore A Durometer Nitrile rubber or long-wearing 90 Shore A Durometer urethane.

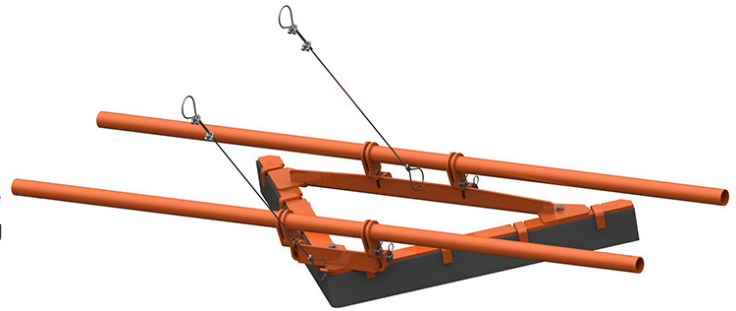

## NOMENCLATURE — CPVHAS XX X XX X X X

- |   |  |
|---|--|
| <ol style="list-style-type: none"> <li>1. Part Number Prefix</li> <li>2. The first XX indicates belt width.<br/>XX = indicates inches (18–96 inches)<br/>A8 = 108 inches<br/>C0 = 120 inches</li> <li>3. The next X indicates blade type:<br/>R = Rubber Blade<br/>O = Orange Urethane Blade<br/>B = Brown Urethane Blade<br/>G = Green Urethane Blade</li> <li>4. The next XX indicates front hanger arm:<br/>01 = 2.56 in. (65 mm)<br/>02 = 6.89 in. (175 mm)<br/>03 = 7.87 in. (200 mm)<br/>04 = 11.81 in. (300 mm)</li> </ol> | <ol style="list-style-type: none"> <li>5. The next X indicates hanger pipes:<br/>C = Compact 3 piece<br/>S = Standard 1 piece</li> <li>6. The next X indicates material:<br/>T = Painted Mild Steel<br/>S = 304 Stainless Steel<br/>F = 316 Stainless Steel</li> <li>7. The next X indicates assembly options:<br/>A = Assembled<br/>B = Assembled with Hub Mount Kit<br/>U = Unassembled<br/>V = Unassembled with Hub Mount Kit<br/>E = Extended Coverage +5.90 in. (150 mm)</li> </ol> |
|---|--|

### BENEFITS

- **Modular Design**  
Bolt together frame for easier installation.
- **One Piece Urethane Nose**  
Easy replacement and long lasting urethane life.
- **Longer Wear Life**  
1 inch thick urethane side blades for longer wear and lower friction.
- **Rugged Frame Construction**  
Thick steel frame for the toughest applications that also provides the ballast for blade tension.

Blade Type	P/N	
Rubber	CPVHBSXXR*	
Orange Urethane	Blade Nose	CPVHB001O
	Blade Sides	CPVHBSXXO*
Brown Urethane	Blade Nose	CPVHB001B
	Blade Sides	CPVHBSXXB*
Green Urethane	Blade Nose	CPVHB001G
	Blade Sides	CPVHBSXXG*

\*XX indicates belt width



**Martin Engineering USA**  
One Martin Place  
Neponset, IL 61345-9766 USA  
800 544 2947 or 309 852 2384  
Fax 800 814 1553  
www.martin-eng.com

**COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV GL  
= ISO 9001 =**