

Martin[®] X-Stand

AIR CANNON X-STAND ONLY
P/N A50009T-XXXL-H*



AIR CANNON X-STAND AND HURRICANE AIR CANNON
P/N A50009T-XXXL-A*



AIR CANNON X-STAND AND TYPHOON AIR CANNON
P/N A50009T-XXXL-AT*

The **X-Stand** was designed to provide a sturdy, reliable, and secure mounting solution for air cannons. It gives customers the flexibility to mount cannons onto a safe, stable structure while maintaining all the performance benefits of air cannon technology.


Key Advantages of the X-Stand

- Improved Safety & Versatility**
 The X Stand allows cannons to be positioned away from extreme heat zones or hard to reach areas, making maintenance and operation safer and more accessible.
- Replaces Multi Port Systems**
 With strategic placement, an X Stand can perform the function of multi port cannon setups, simplifying the system and reducing installation complexity.
- Supports Hard Pipe Connections**
 The stand enables the use of hard piping instead of flexible hose, increasing durability, reducing wear, and aligning with best practice installation standards.
- One Port / One Cannon Compliance**
 The X Stand fully supports our installation protocol of one port per cannon, ensuring optimal air flow and maximum performance.
- Flexible Configuration Options**
 Multiple X Stands can be arranged in stacked vertical or horizontal configurations, offering adaptable solutions for a variety of applications.
- Compatible With Safety & Nozzle Accessories**
 The X Stand can be used together with the **Thermo Safety Shield** and a wide range of nozzle designs, providing additional protection and customizing the cannon's performance to the application.

*XX indicates tank size ie. 35L, 70L, 150L

TECHNICAL DATA SHEET

DIMENSIONS

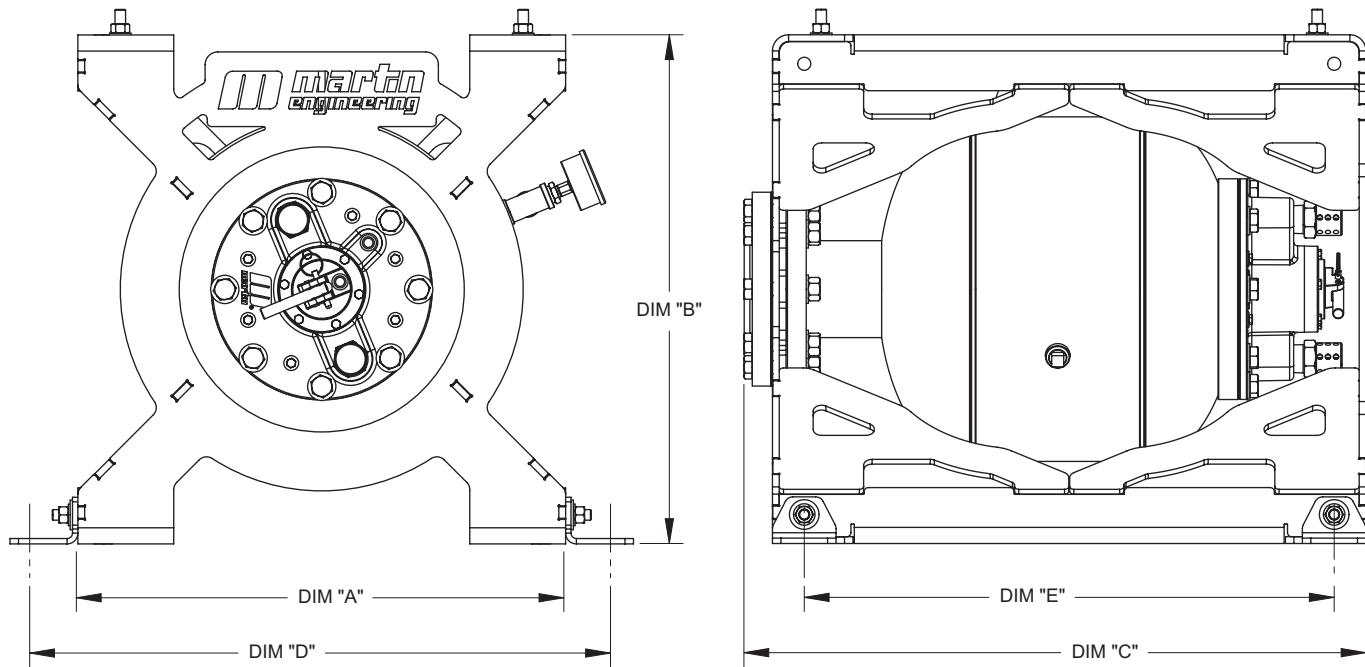

PART NUMBER	DIM "A" - in. (mm)	DIM "B" - in. (mm)	DIM "C" - in. (mm)	DIM D" - in. (mm)	DIM "E" - in. (mm)
A50009T-35L-H					
A50009T-35L-A	22.6 (575)	23.6 (600)	28.9 (734)	27.0 (685)	24.6 (625)
A50009T-35L-AT					
A50009T-70L-H					
A50009T-70L-A	26.6 (675)	27.6 (700)	30.9 (784)	30.9 (785)	26.6 (675)
A50009T-70L-AT					
A50009T-150L-H					
A50009T-150L-A	34.8 (883)	36.0 (914)	39.7 (1009)	39.1 (993)	33.9 (860)
A50009T-150L-AT					



Martin Engineering USA
 One Martin Place
 Neponset, IL 61345-9766 USA
 800 544 2947 or 309 852 2384
 Fax 800 814 1553
www.martin-eng.com

**COMPANY WITH
 QUALITY SYSTEM
 CERTIFIED BY DNV
 ISO 9001**