


Martin® MRT (Martin Roller Tracker)

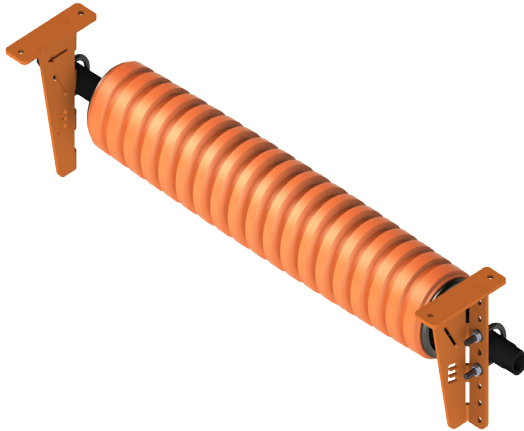


BENEFITS

- Ease of Installation and low maintenance
- A vibration free rolling action
- A design that meets customer needs
- Superior bearings used for superior quality
- No contact with edge of the belt
- Polyurethane lagging improves durability

DIMENSIONS

BELT WIDTH		DIM A	DIM B	DIM C
(mm)	(in)	(mm)	(mm)	(mm)
500	20	939	736	565
600	24	1038	838	664
750	30	1190	990	812
900	36	1344	1144	961
1050	42	1496	1296	1109
1200	48	1648	1448	1258
1350	54	1800	1600	1456
1500	60	1952	1752	1604

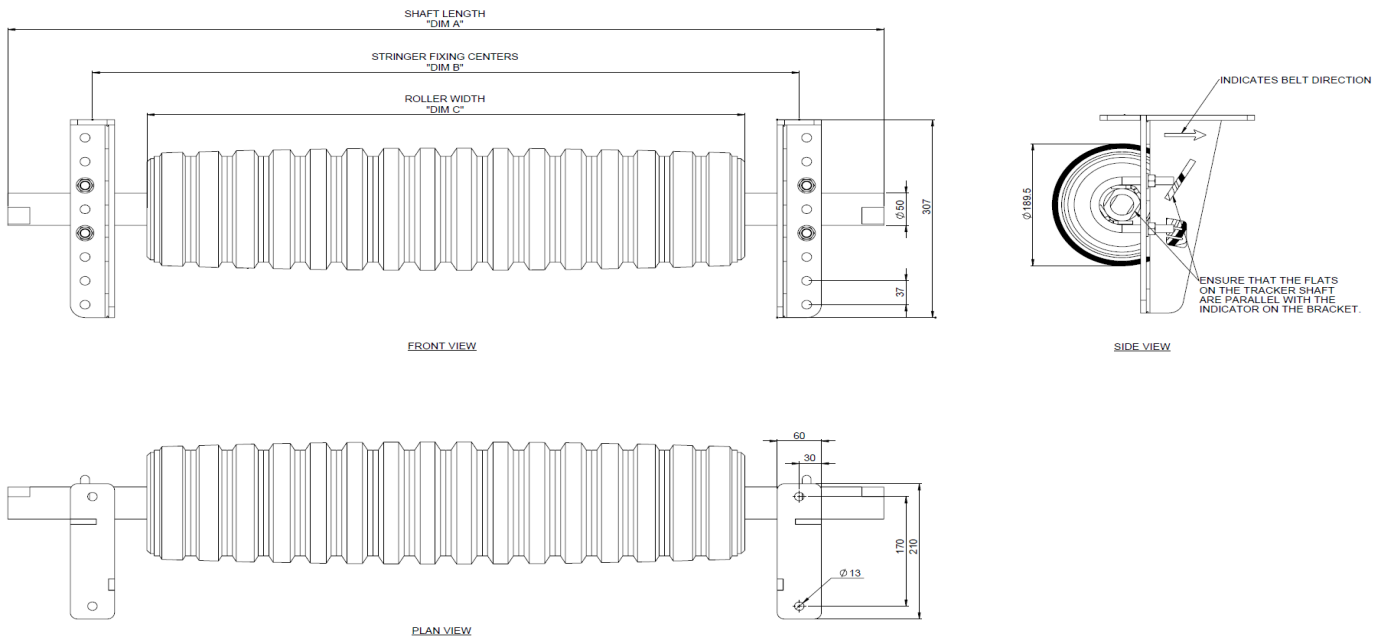

Martin Engineering RSA
 Cnr Antwerpen str & Arnheimsingel
 Die Heuwel, Witbank, Emalahleni
 Tel +27 13 656 5135
 Fax +27 13 656 5129
 www.martin-eng.co.za

Subject to change without prior notice.
 Quality Management System Certified by DNV -
 ISO 9001

QUALITY MANAGEMENT SYSTEM
 CERTIFIED BY DNV
ISO 9001:2008