


# Martin® 4-inch Impacting Railcar Vibrator

The [Martin® 4-inch Impacting Railcar Vibrator](#) provides up to 2200 lbs (998 kg) of force to unload stubborn materials.

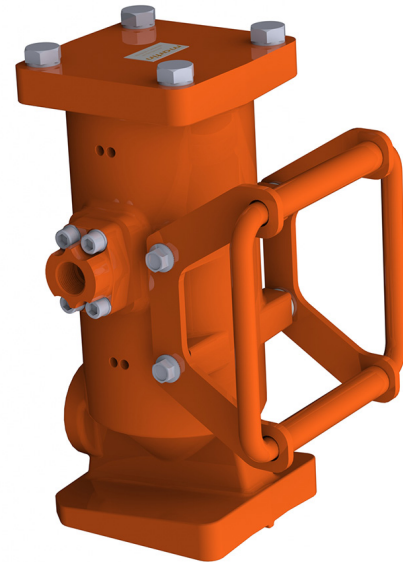

## BENEFITS

- Improves Efficiency**  
 Linear vibrator provides powerful force to boost material flow.
- Small But Mighty**  
 Compact vibrator and mount assembly provides plenty of power to unload stubborn materials.
- Unique Handle**  
 Unique handle provides operators several grip options.
- Guaranteed Performance**  
 Impacting Vibrator is covered by Martin Engineering's *Absolutely, Positively, No Excuses* Guarantee.

## NOTE

For extended life and optimum performance the air source should be filtered, regulated (80 psi max.) and lubricated (1 - 2 drops/min) within 25 feet of the vibrator.

## ACCESSORIES

Description	Part Number
Female Wedge Bracket (LBF)	12735
Control Line Kit	39504
Air Motor Oil (qt)	14766

## SPECIFICATIONS

Model	P/N	Piston	Air Pressure	CFM	VPM	Force	Weight
Martin® 4-inch Impacting Railcar Vibrator	AP5-400RC	4"	40 psi	22	1500	1330 lbs	81 lbs
			60 psi	25	1750	2010 lbs	
			80 psi	42	1900	2200 lbs	



**Martin Engineering USA**  
 One Martin Place  
 Neponset, IL 61345-9766 USA  
 800 544 2947 or 309 852 2384  
 Fax 800 814 1553  
[www.martin-eng.com](http://www.martin-eng.com)

**COMPANY WITH  
 QUALITY SYSTEM  
 CERTIFIED BY DNV GL  
 = ISO 9001 =**