

Martin[®] Compact Cleaner



The Martin® Compact Cleaner from Martin Engineering uses a low-profile blade mounted on an internal square mainframe for effective belt cleaning in tight spaces. It is designed for applications on small pulleys and belts operating at speeds up to 350 fpm (1.78 m/sec).

BENEFITS

Fits In Smallest Spaces

Fits in spaces with as little as 6.75 inches (171 mm) of clearance on pulleys as small as 7.00 inches (180 mm) in diameter.

Curved Blade Sustains Performance

Blade incorporates patented Continuous Angle Radial Pressure (CARP) design to maintain effective cleaning across blade life.

Simple Blade Service

To replace worn blade, slide new blade onto square tube mainframe.

Choose Segments

Segments allow one-piece blade to accommodate crowned pulleys and variations in belt travel.

Urethane Options Match Needs

Blades are available in high-performance urethane "colors" to match application requirements.

High-performance urethanes are available; see your Martin Engineering representative for assistance in specifying nonstandard products.

Refer to Form No. L3375.

NOMENCLATURE

	33464 -	XX	XX	XX
		\top	\top	Т
P/N 5-Digit Prefix ———				
Belt Width (inches)				
Segments				
Urethane Color ———				

SEGMENTS

10 with segments11 without segments

URETHANE COLOR

BR for Brown GR for Green NB for Navy Blue CL for Tan Blank for Orange


SPECIFICATIONS

Belt Cleaner	Max. Belt Speed fpm (m/sec)	Maximum Service Temp. °F (°C)	Min Pulley Diameter in. (mm)	Mounting Distance in. (mm)
Martin® Compact Cleaner	350 (1.78)	160 (71) Continuous 180 (82.2) Intermittent	6.0 (152.4)	1.75 (44.5)


TECHNICAL DATA SHEET

DIMENSIONS

Belt Width in. (mm)*	Mainframe Length in. (mm) A	Blade Coverage in. (mm) B	Shipping Weight Ib (kg)	Assembly P/N
12 (305)	28 (711)	10 (254)	12 (5.44)	33464-12XXXX
14 (356)	30 (762)	12 (305)	14 (6.35)	33464-14XXXX
16 (406)	31 (787)	14 (356)	15 (6.80)	33464-16XXXX
18 (457)	32 (813)	16 (406)	16 (7.26)	33464-18XXXX
24 (610)	40 (1016)	22 (559)	25 (11.34)	33464-24XXXX
30 (762)	44 (1118)	28 (711)	27 (12.25)	33464-30XXXX
36 (914)	52 (1321)	34 (864)	30 (13.61)	33464-36XXXX
42 (1067)	56 (1422)	40 (1016)	33 (14.97)	33464-42XXXX
45 (1143)	60 (1524)	43 (1092)	33 (14.97)	33464-45XXXX
48 (1219)	64 (1626)	46 (1168)	33 (14.97)	33464-48XXXX



^{*}Metric measurements represent a conversion of belt width in inches rather than a standard metric belt size.

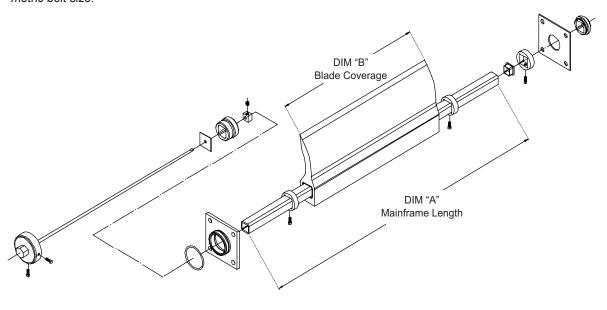

Belt Cleaner	Tensioner	Tensioner P/N	Replacement Blade P/N
Martin® Compact Cleaner	Martin [®] Internal Spring Tensioner	33036-P	33463-XXXXXX



Martin Engineering USA
One Martin Place
Neponset, IL 61345-9766 USA
800 544 2947 or 309 852 2384
Fax 800 814 1553
www.martin-eng.com

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001=